



AMEC GROUP

Since 1983

CHANGZHOU MACHINERY & EQUIPMENT IMP. & EXP. CO., LTD.
Add: No. 62 Xinggang Road, changzhou, Jiangsu, 213023, China.
Tel.: +86-519-83978002/83978022 E-mail: sales@amecco.com
Fax: +86-519-83978999/86600406 Http://www.amecco.com



CHANGZHOU AMEC GROUP





Company Profile


CHANGZHOU AMEC GROUP CO.,LTD (AMEC) is a group company who focuses on group members' assets management, production coordination, market network, strategic investment, etc. AMEC owns seven independent incorporated entity enterprises, most of which are manufacturers. AMEC designs, develops, manufactures and markets a variety of high quality, cost effective engines, portable generators, tractors, mechanical power transmission parts, electric motors, OEM items and auto fittings, etc.



Head Office

Factory



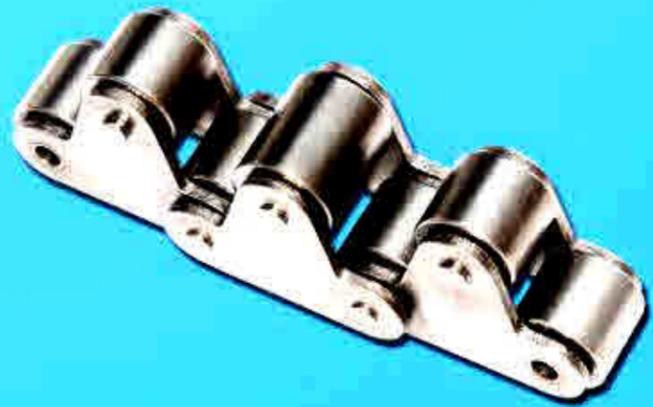

目录 Contents

糖机链 Sugar Chains

直板型糖机链 Sugar Mill Chains with Straight Plate	1
弯板型糖机链 Sugar Mill Chains with Bent Plate	2
其它型糖机链 Other Type Sugar Mill Chains	3
糖机链附件 Attachments of Sugar Mill Chains	4

棕榈油链 Palm Oil Chains

直板型棕榈油链 Palm Oil Chains with Straight Plate	6
弯板型棕榈油链 Palm Oil Chains with Bent Plate	7

钢制输送链 Steel Conveyor Chains

M系列输送链 Conveyor Chains(M Series)	8
M系列带附件输送链 Conveyor Chains with Attachment(M Series)	9
MT系列输送链 Conveyor Chains(MT Series)	11
MC系列空心销轴链 Hollow Pin Conveyor Chains(MC Series)	12
FV系列输送链 Conveyor Chains (FV Series)	13
FV系列带附件输送链 Conveyor Chains with Attachments (FV Series)	14
FVT系列输送链 Conveyor Chains (FVT Series)	16
FVC系列空心销轴输送链 Hollow Pin Conveyor Chains(FVC Series)	17
Z系列输送链 Conveyor Chains (Z Series)	18
Z系列带附件输送链 Conveyor Chains with Attachments (Z Series)	19
ZE系列输送链 Conveyor Chains (ZE Series)	20
ZC系列输送链 Hollow Pin Conveyor Chains (ZC Series)	21

工程链 Engineering Chains

重载传动用弯板链 Heavy-Duty Cranked-Link Chains	22
空心销轴链 Hollow Pin Conveyor Chains	23
开沟机链 Trencher Chains	24
手套链 Conveyor Chains for Glove Industry	25
块状链 Block Chains	25

冶金、钢铁行业用输送链 Conveyor Chains for Metallurgy and Steel Industry

板式销轴链 Leaf Pin Chains	26
钢板输送链 Conveyor Chains of Steel Sheet	28
钢锭提升链 Lift Chains for Steel Ingot	28
冷床链 Cold Bed Chains	29
链式轧辊输送链 Chains-style Roll Conveyor Chains	33
晾干链 Air drying chains	34
喷漆链 Painted chains	35
冶炼轧制驮载链 Loading Chains for Metallurgical	36
大节距重型驮载链 Large-Pitch Heavy Duty loading Chains	38

水泥行业输送链 Conveyor Chains for Cement Mill Industry

弯附板式提升机链 Attachment Sidebar Elevator Chains	39
斗式提升机链 Bucket Elevator Chains	40
FU型运机链 FU Style Chains	44

汽车行业用链条 Conveyor Chains for Automobile Manufacture

汽车喷涂线输送链 Conveyor Chains for Automobile Spray Painting Line	45
汽车制造驮载链(滑撬链) Loading Chains for Automobile Manufacture (Skid Chains)	45
汽车淋水线链条(不锈钢) Conveyor Chains for Automobile Showering Line (Stainless Steel)	46

焊接弯板链 Welded Steel Chains

窄系列焊接弯板链 Narrow Series Welded Steel Chains	48
窄系列焊接弯板链附件 Narrow Series Welded Steel Chains-Attachments	51
宽系列焊接弯板链 Wide Series Welded Steel Chains	56
宽系列焊接弯板链附件 Wide Series Welded Steel Chains-Attachments	58


输送用平顶链 Flat-Top Chains for Conveyor

钢制直输平顶链 Steel Straight Run Flat-Top Chains	61
钢制曲输平顶链 Steel Sideflex Flat-Top Chains	62

链轮 Sprockets

重载弯板滚子链链轮 Heavy-duty Cranked-Link Chains Sprocket	63
链轮产品 Sprockets Products	64

直板型糖机链 Sugar Mill Chains with Straight Plate

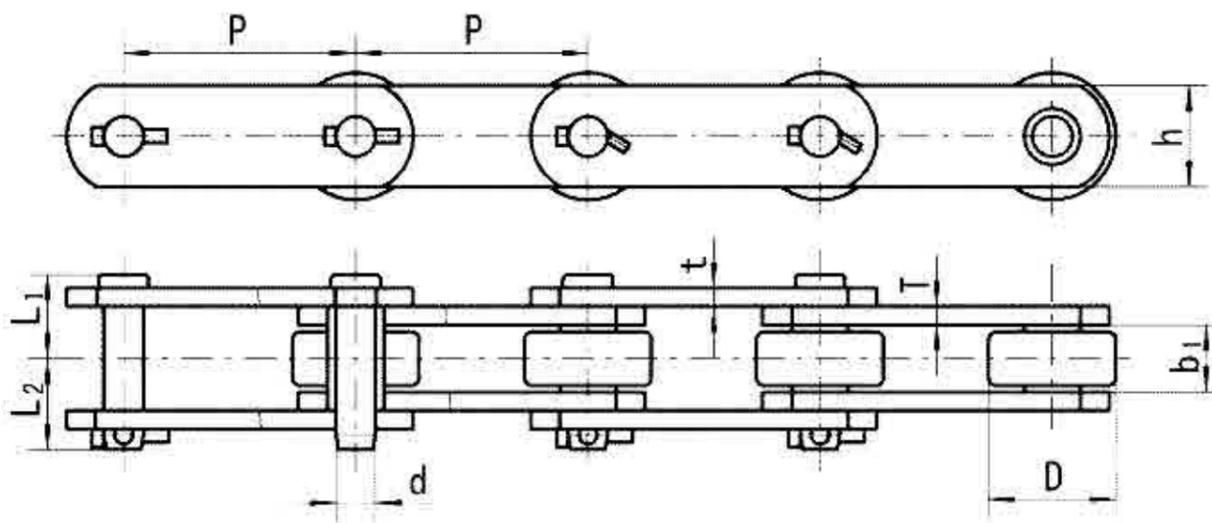


链号 Chain No.	节距 Pitch P mm	内节内宽 Width between Inner plates b1(min) mm	滚子(套筒) 外径 Roller(Bush) diameter D(max) mm	销轴 Pin			链板 Plate		最小抗 拉强度 Ultimate tensile strength Q(min) kN	许用工 作载荷 Rated working load kN	每米 净重 Weight per meter q kg/m
				d mm	L1 mm	L2 mm	h mm	t/T mm			
US101.6	101.6	31.8	57.15	15.88	34.4	38.4	38.1	6.4	72.3	8.2	11.67
P101.6-R47	101.6	30	47	15.88	41	45	41	10	242	19.4	17.98
US127	127	38.4	69.85	19	45.1	51.4	50.8	9.6	180	20.3	19.22
*P152.4-R66.7	152.4	30	66.7	26.92	35.5	41.5	50.8	8	167	13.4	16.11
C9060	152.4	37.7	69.85	18.9	45	49.3	50.8	9.5	250	28.2	17.2
C09063	152.4	38	76.2	23.83	47.1	54.9	61.9	10.3	635	36.1	22.27
*1796	152.4	37.8	69.85 76.2 73	22.23	43.9	53.2	57.2	9.5	444.5	33.3	18.5 19.5 19.2
*C09061	152.4	37.7	69.85	18.9	44.9	50.3	57.2	9.5	377.9	28.2	18.74

链条销轴与套筒有碳钢和不锈钢两种材质。

* Chains: there are two kinds of materials for pin and bush, which are Carbon steel and stainless steel.

弯板型糖机链 Sugar Mill Chains with Bent Plate

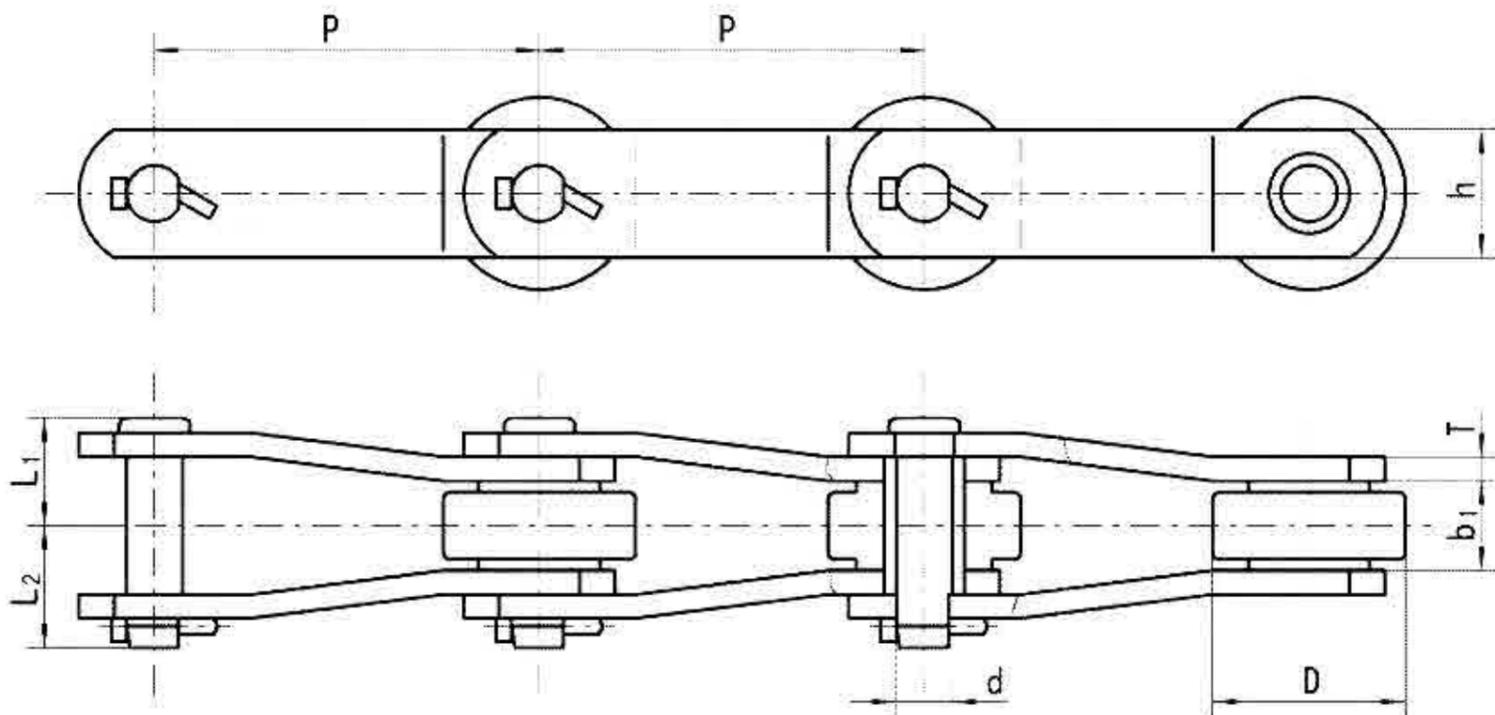


链号 Chain No.	节距 Pitch P mm	窄端内宽 Inside diameter b1 (min) mm	滚子(套筒) 外径 Roller(Bush) diameter D(max) mm	销轴 Pin			链板 Plate		最小抗拉强度 Ultimate tensile strength Q(min) kN	许用工作载荷 Rated working load kN	每米净重 Weight per meter q kg/m
				d mm	L1 mm	L2 mm	h mm	T mm			
* D2184	152.4	34.9	76.2	22.23	43.9	51.2	50.8	9.5	355.6	31.6	17.7
W1796	152.4	37.8	69.85	22.23	44.2	52.9	57.2	9.5	444.5	31.6	18.59
RO9063	152.4	38	76.2	23.83	47.1	54.9	60.3	10.3	622.3	36.1	21.83
SS1130	152.4	37.7	63.5	19.05	38.5	45.6	50.8	6.4	202	16	13.11
8184	203.2	45.9	88.9	25.4	59.7	65.8	69.9	12.7	742.4	47.6	29.2
SS800	203.2	46.1	88.9	25.4	59.7	69.3	75	12.7	686	55	30.65
22840	228.6	46	99	32	62.3	73.1	86	15	884	71	39.43


*链条销轴与套筒有碳钢和不锈钢两种材质。

* Chains: there are two kinds of materials for pin and bush , which are Carbon steel and stainless steel.

其它型糖机链 Other Type Sugar Mill Chains

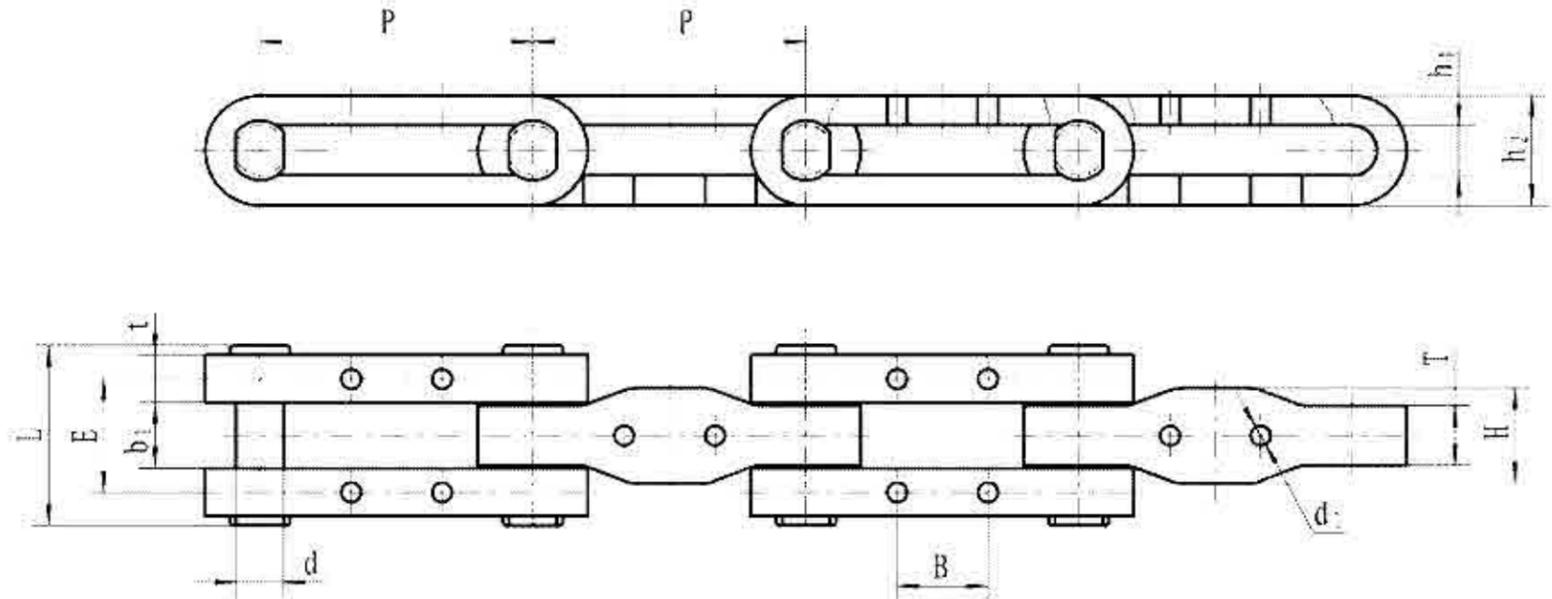


链号 Chain No.	节距 Pitch P mm	外节内宽 Width between Outer plates b1(min) mm	销轴 Pin		链板 Plate							最小抗 拉强度 Ultimate tensile strength Q min kN	许用工作 载荷 Rated working load kN
			d mm	L mm	h1 mm	h2 mm	H mm	B mm	E mm	d1 mm	t/T mm		
P228.6*50.8*88	228.6	52	39	160	40	88	67	76	92	16.5	50.8	1350	108

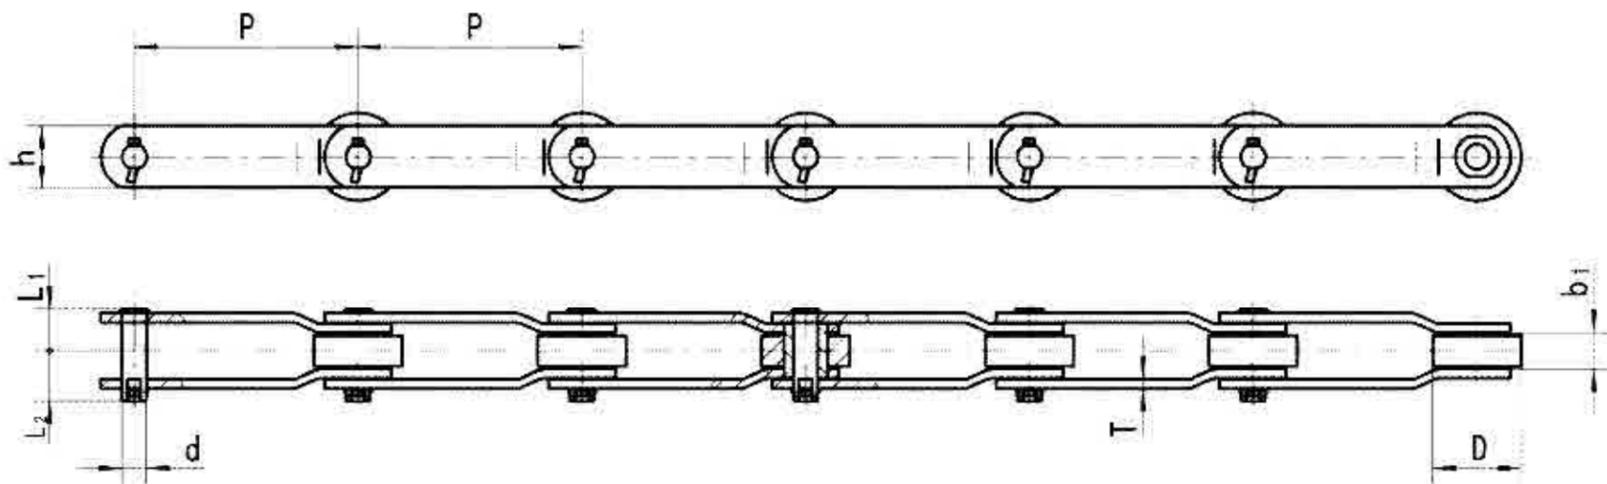


链号 Chain No.	节距 Pitch P mm	内节内宽 Width between inner plates b1 (min) mm	滚子外径 Roller diameter D(max) mm	销轴 Pin			链板 Plate		最小抗 拉强度 Ultimate tensile strength Q(min) kN	许用工 作载荷 Rated working load kN	每米 净重 Weight per meter q kg/m
				d mm	L1 mm	L2 mm	h mm	T mm			
ROP9-R90 x 37.1	228.6	36.8	90	25.4	43.55	55.45	63.5	9.5	328	28	20
P228.6A-R98	228.6	38	98	32.5	60	70	75/80	16	900	72	36.32
P228.6-R98 x 12.7	228.6	38	98	28.7	55.4	61.6	76.2	12.7	700	56	30.10

糖机链附件 Attachments of Sugar Mill Chains

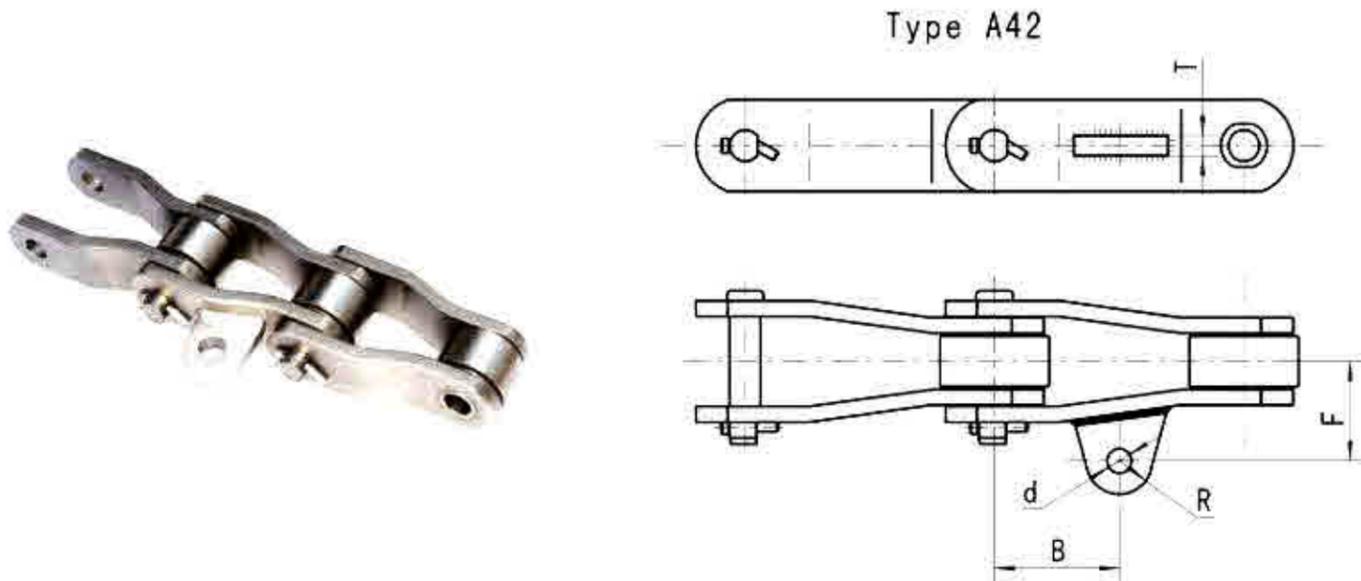


链号 Chain No.	B mm	F mm	R mm	d mm	T mm
ROP9-R90 x 37.1	113.6	80	32	20	19
P228.6-R98	114.3	97	30	20	16
SS800	101.6	81.7	28.5	20	16
22840-SH	120	97	25	21	19
SS1130	76.2	67	25	16.7	16

Type C22

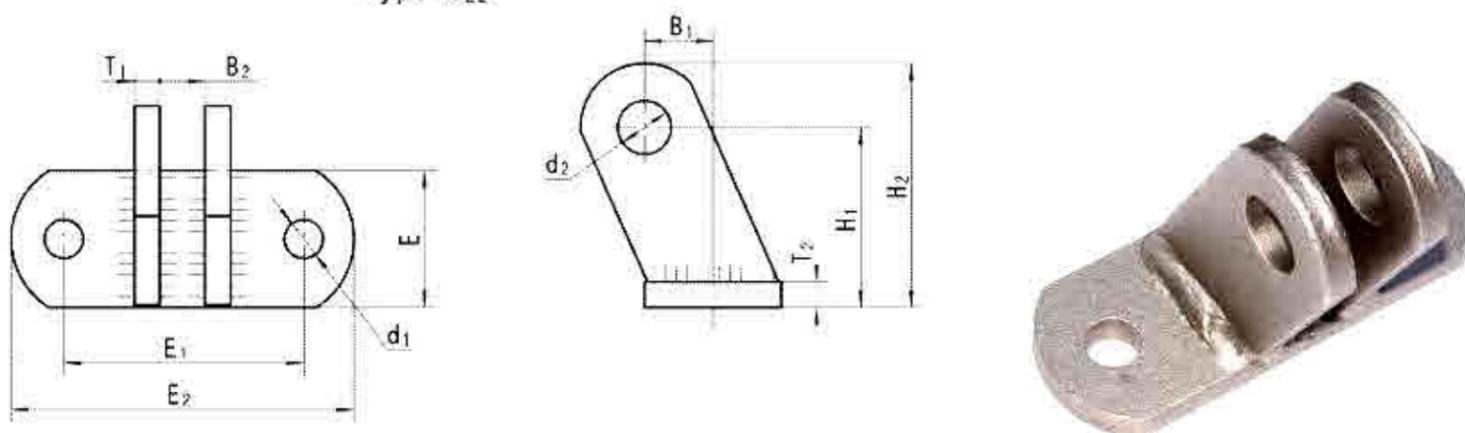


型号 Type	E mm	E1 mm	E2 mm	B1 mm	B2 mm	T1 mm	T2 mm	H1 mm	H2 mm	d1 mm	d2 mm
1C 22	60	88.9	132	25	21	12	12	68.5	98.5	18	20.8
2C 22	50.8	88.9	127	25.4	16.8	9.5	9.5	66.8	90.6	14.2	20.8
3C 22	44.45	84	111	20	16	8	8	30	48	11	17

糖机链附件
Attachments of Sugar Mill Chains

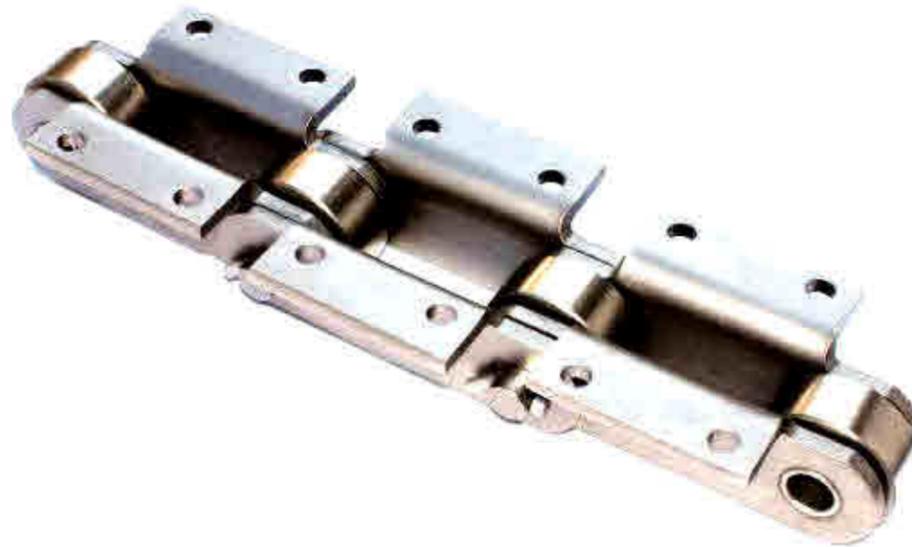


Type K2

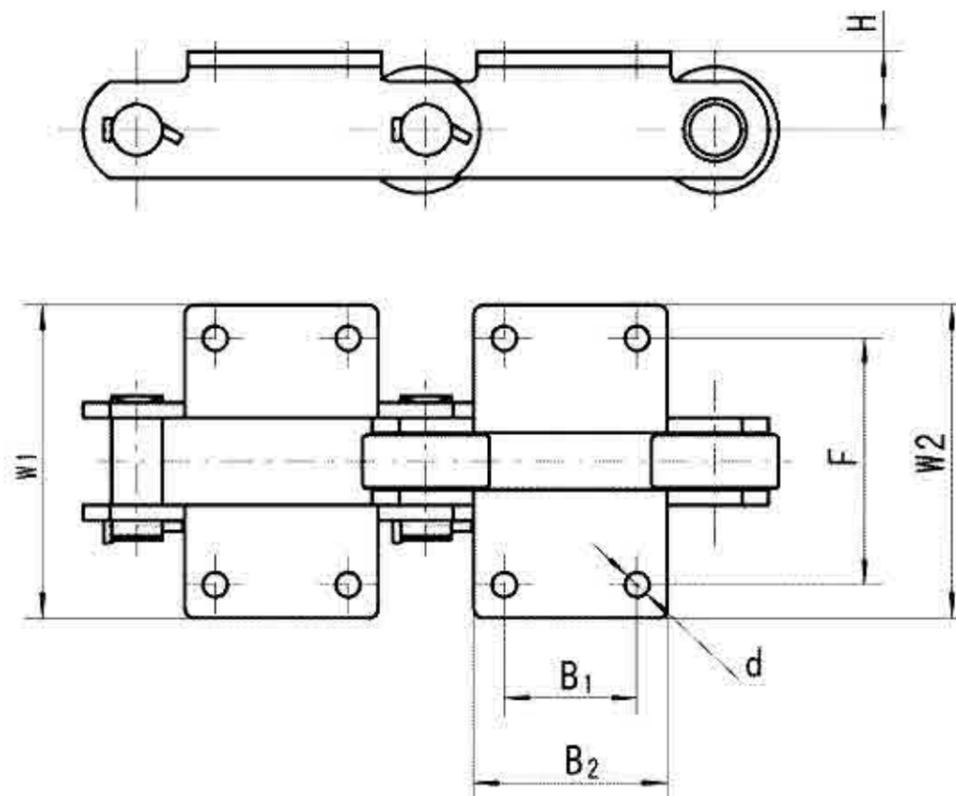

链号 Chain No.	H mm	B1 mm	B2 mm	d mm	F mm	W1 mm	W2 mm
C09060-BK2	41.3	76.2	114.3	13	111.1	171.5	151.2
09061	41.3	76.2	114.3	13	111.1	165.1	144.7
C09063-BK2	44.5	76.2	114.3	14.3/12.7	111.1	165.1	143.1
1796	41.3	76.2	114.3	11.1/13/14	111.1	165.1	144.7
P152.4-R66.7	41.3	70	102	13	130	164.9	164.9

直板型棕榈油链 Palm Oil Chains with Straight Plate

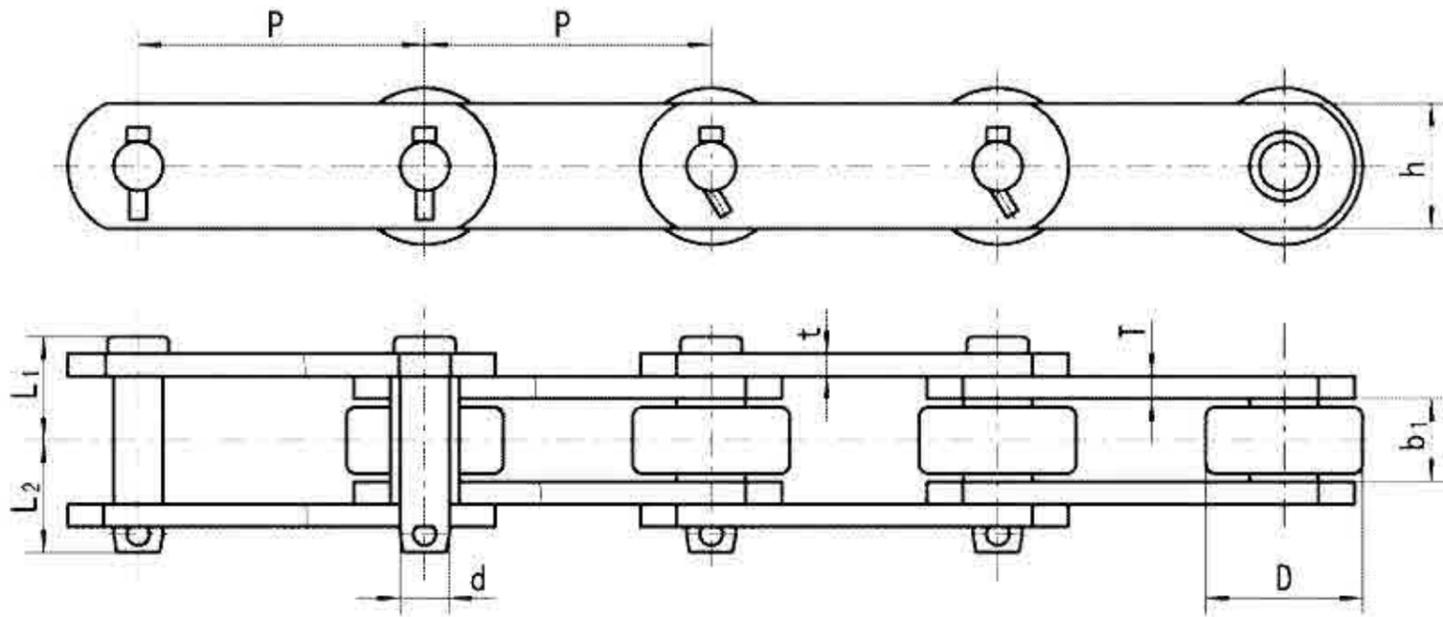


链号 Chain No.	节距 Pitch P mm	内节内宽 Width between inner plates b _i (min) mm	滚子 外径 Roller diameter D(max) mm	销轴 Pin			链板 Plate		最小抗 拉强度 Ultimate tensile strength Q(min) kN	许用工 作载荷 Rated working load kN	每米 净重 Weight per meter q kg/m
				d mm	L ₁ mm	L ₂ mm	h mm	t/T mm			
B3076	76.2	15.2	31.75	13.97	21.4	26.6	25.8	4	33.4	3.1	3.7
*B1016H	101.6	19	47.63	19.05	27.7	34.3	38.1	6.4	135	12.6	8.21
PM90R	101.6	22	47.6	11.1	23.5	27.7	32	4.5	95	8.9	5.8
PM94R	101.6	30	50.8	14.27	32	36.7	38.1	6.4	158	14.4	9.88
PM94RA	101.6	23.5	48	14.27	28.6	33.6	38.1	6.4	158	14.4	8.54
ES90-R20	101.6	21.4	47.6	11.1	25	29.9	32	4.9	100	9.2	6.18
ES4P23	101.6	19.05	47.63	19.05	25.2	30.8	38.1	5.1	95	8.8	7.29
4 × 15000	101.6	18.9	47.63	19.05	24.5	30.1	40	5/6	66.7	6.1	7.44
4 × 18000	101.6	19	47.6	19	23.2	26.8	40	5	80	7.4	6.89
6 × 30000	152.4	25.4	56.7	26.9	33.9	40.9	50.8	6	133	14.6	10.36
B5289	152.4	25	66.8	22.07	30.5	37.1	50.8	6.4	178	17.3	11.35
B5257	152.4	36	34.95	17.4	39.7	46.8	44.45	8	223	21.8	9.19
B5326H	152.4	19	47.5	19.05	24.9	31.6	38.1	5	88.9	8.5	5.78
ES6P36	152.4	25.4	66.7	26.9	37.1	43.9	50.8	7.8	215	20.2	13.43
B5305	160	37.8	70	17.48	37.2	43.9	50.8	6.4	245	22.8	13.55

*链条零部件有碳钢和不锈钢两种材质。

*Chains: There are two kinds of materials for pin and bushing, which are Carbon steel and stainless steel.


弯板型棕榈油链
Palm Oil Chains with Bent Plate

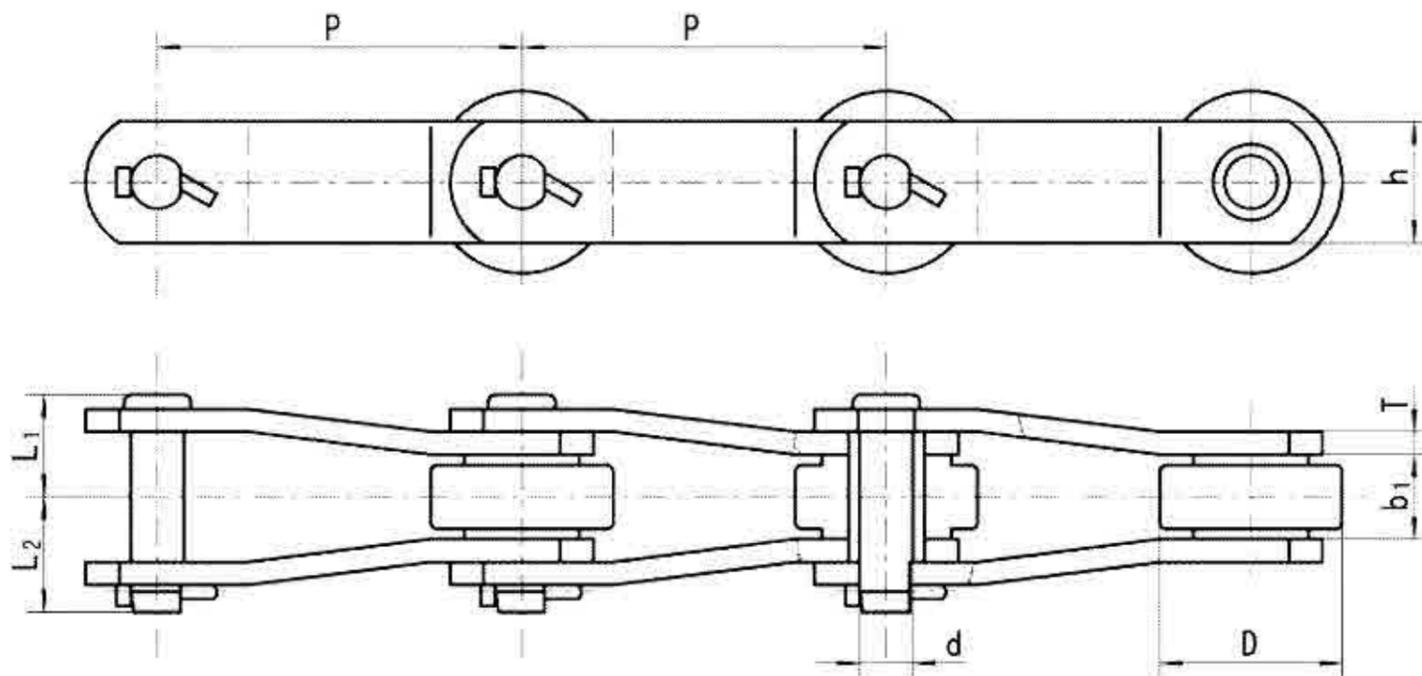

链号 Chain No.	节距 Pitch P mm	窄端内宽 Inside diameter b_1 (min) mm	滚子(套筒) 外径 Roller (Bush) diameter D(max) mm	销轴 Pin			链板 Plate		最小抗 拉强度 Ultimate tensile strength Q min kN	许用工 作载荷 Rated working load kN	每米 净重 Weight per meter q kg/m
				d mm	L_1 mm	L_2 mm	h mm	T mm			
B5029	66.17	28	22.23	11.1	31.7	35.1	28.6	6.4	122.8	8.1	5.41
#B5094	101.6	39.8	36.5	15.77	43.3	46.1	44.45	8	180	12.1	11.36
B5234	152.4	34.9	76.2	22.3	43.9	53.4	50.8	9.5	355.6	24.9	17.93


#链条为套筒链,无滚子.
Chain: bushing chain with no roller.

M系列输送链 Conveyor Chains (M series)

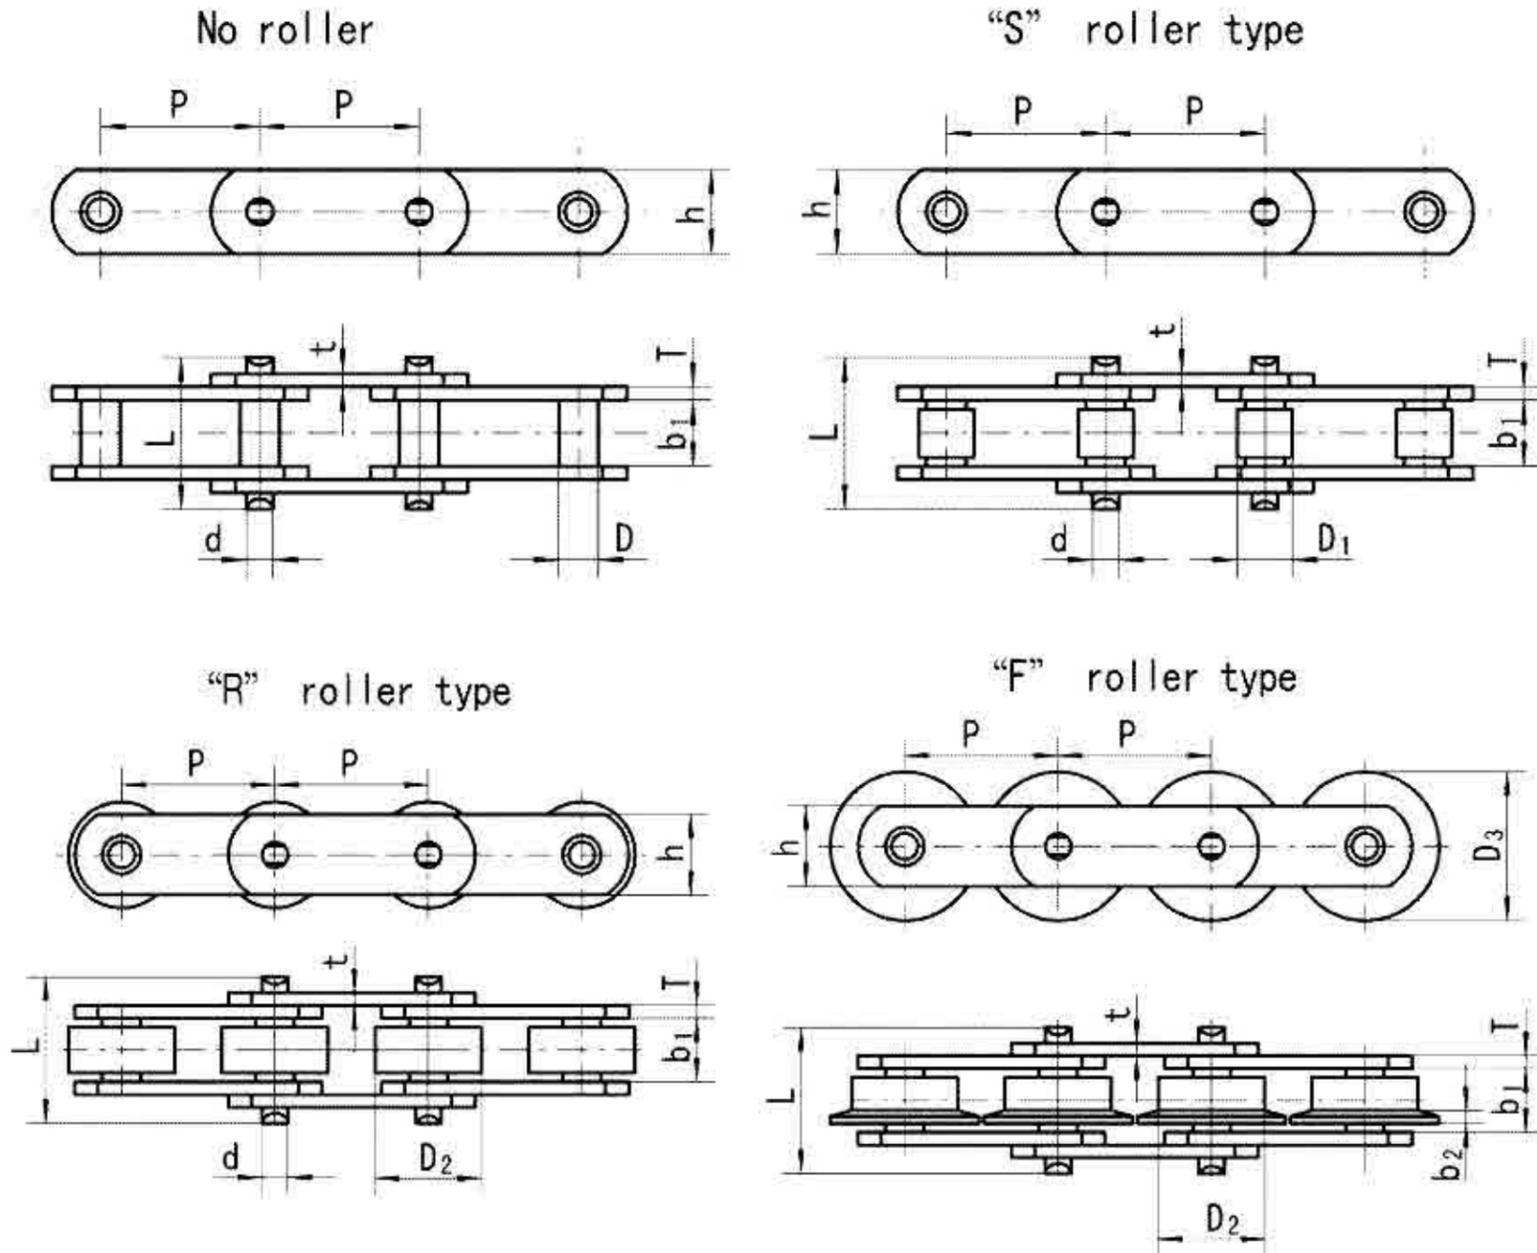

链号 ISO	节距 Pitch								内节内宽 Width between inner plates b ₁ (min) mm	套筒 外径 Roller diameter D (max) mm	销轴 Pin		链板 Plate		滚子 Roller			最小抗 拉强度 Ultimate tensile strength Q _{min} kN
	P mm										d mm	L mm	h mm	t/T mm	"S" D ₁ mm	"P" D ₂ mm	"F" D ₂ b ₂	
M20	40	50	63	80	100	125	160	16	9	6	35	19	2.5	12.5	25	25	3.5	20
M28	50	63	80	100	125	160	200	18	10	7	40	21	3.0	15	30	30	4	28
M40	63	80	100	125	160	200	250	20	12.5	8.5	45	26	3.5	18	36	36	4.5	40
M56	63	80	100	125	160	200	250	24	15	10	52	31	4.0	21	42	42	5	56
M80	80	100	125	160	200	250	315	28	18	12	62	36	5.0	25	50	50	6	80
M112	80	100	125	160	200	250	315	32	21	15	73	41	6.0	30	60	60	7	112
M160	100	125	160	200	250	315	400	37	25	18	85	51	7.0	36	70	70	8.5	160
M224	125	160	200	250	315	400	500	43	30	21	98	62	8.0	42	85	85	10	224
M315	160	200	250	315	400	500	630	48	36	25	112	72	10	50	100	100	12	315
M450	200	250	315	400	500	630	800	56	42	30	135	82	12	60	120	120	14	450
M630	250	315	400	500	630	800	1000	65	50	36	154	103	16	70	140	103	16	630
M900	250	315	400	500	630	800	1000	76	60	44	180	123	18	85	170	123	18	900


M系列带附件输送链 Conveyor Chains with Attachment(M Series)

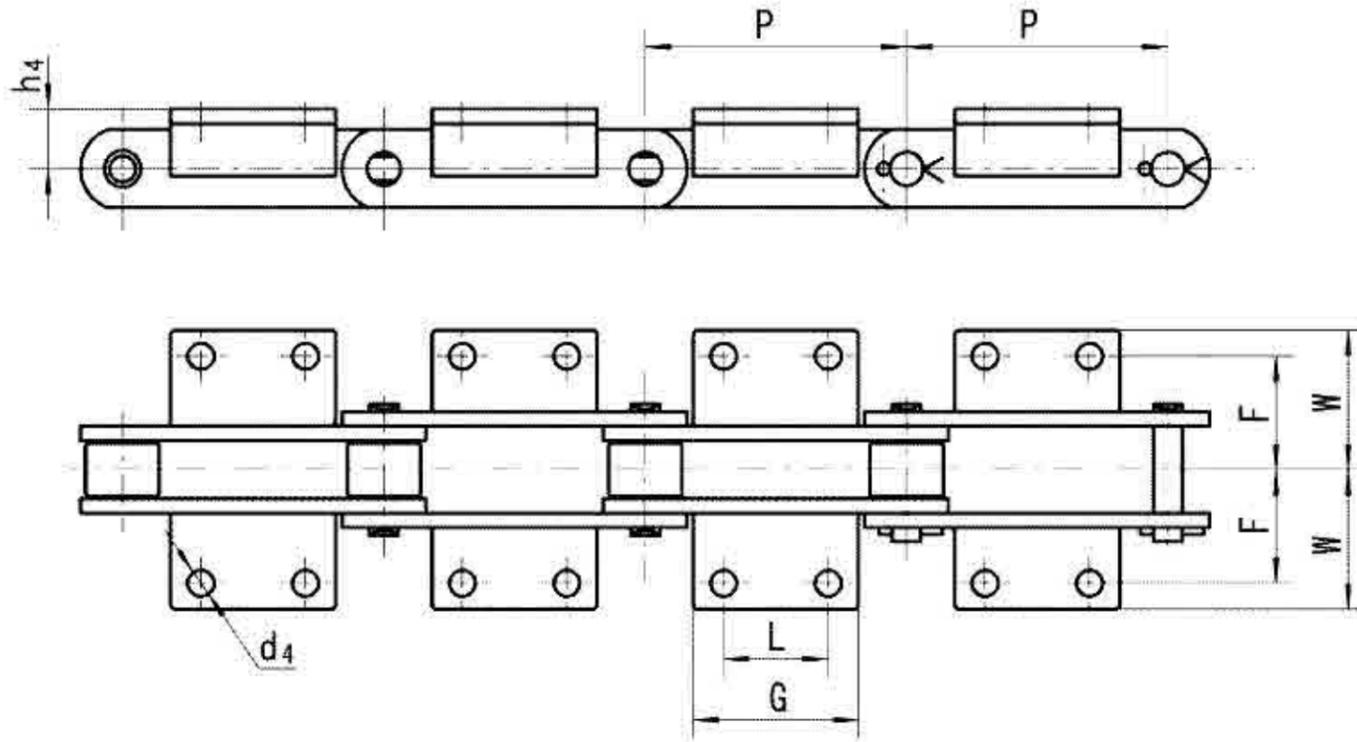

链号 ISO Chain No.	节距 Pitch P mm	L mm	G mm	d ₄ mm	F mm	W mm	h ₄ mm
M20	40	●	14	6.6	27	40	16
	50	●	14				
	63	20	35				
	80	35	50				
M28	50	●	20	9	32	47	20
	63	●	20				
	80	25	45				
	100	40	60				
M40	63	●	31	9	35	50	25
	80	20	45				
	100	40	60				
	125	65	85				
M56	63	●	22	11	44	61	30
	80	●	30				
	100	25	50				
	125	50	75				
	160	85	110				
M80	80	●	30	11	48	65	35
	100	25	50				
	125	50	75				
	160	85	110				
	200	125	150				

- 附件带一个孔
- Attachment with 1 hole

带附件米制输送链(M系列)
Metre Conveyor Chains with Attachments (M series)

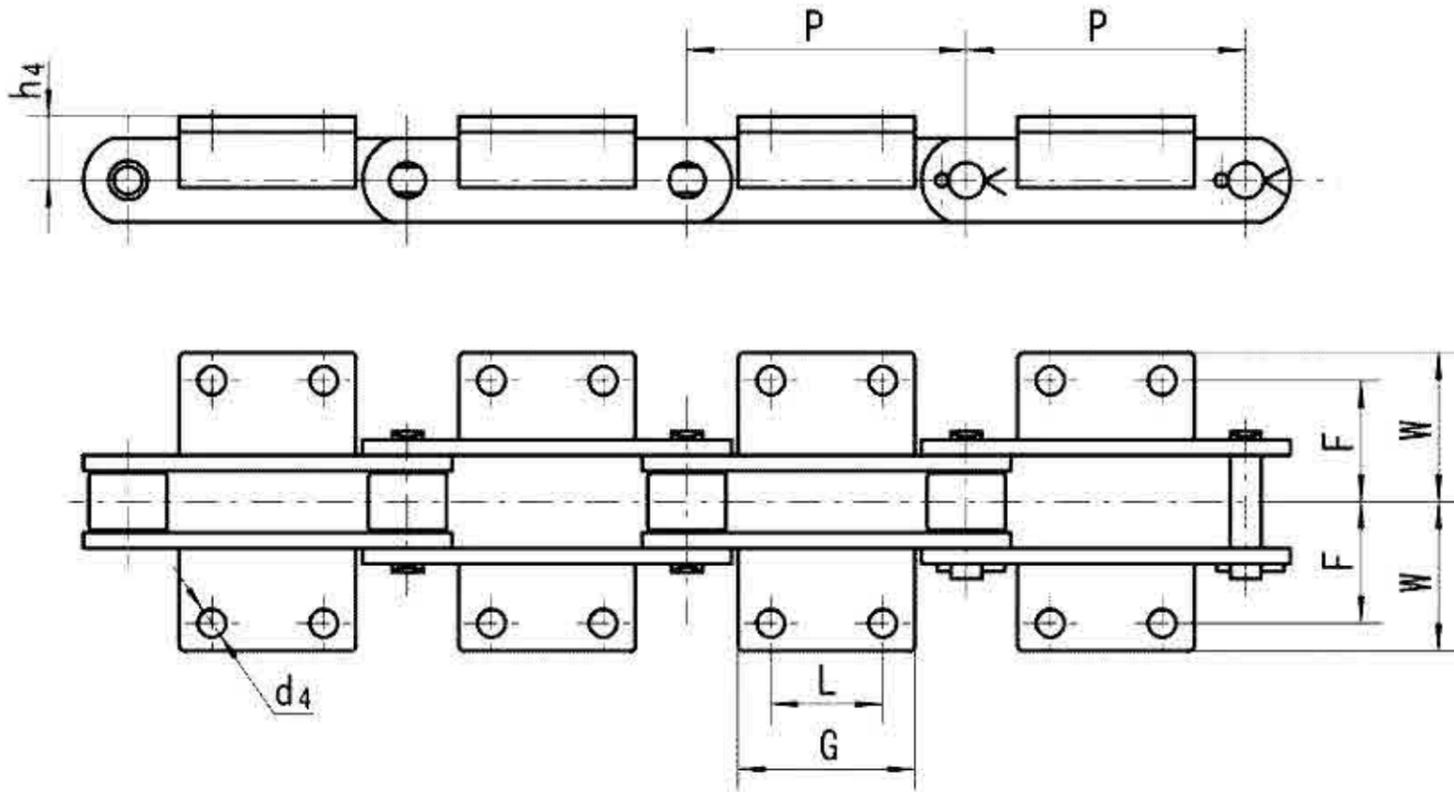


链号 ISO Chain No.	节距 Pitch P mm	L mm	G mm	d ₄ mm	F mm	W mm	h ₄ mm
M112	80	●	28	14	55	80	40
	100	●	40				
	125	35	65				
	160	65	95				
	200	100	130				
M160	100	●	30	14	62	85	45
	125	25	50				
	160	50	80				
	200	85	115				
	250	145	175				
M224	125	●	35	18	70	110	55
	160	●	60				
	200	65	100				
	250	125	160				
	315	190	230				
M315	160	●	35	18	80	115	65
	200	50	85				
	250	100	140				
	315	155	190				
	400	155	205				

- 附件带一个孔
- Attachment with 1 hole


MT系列输送链

Conveyor Chains (MT series)

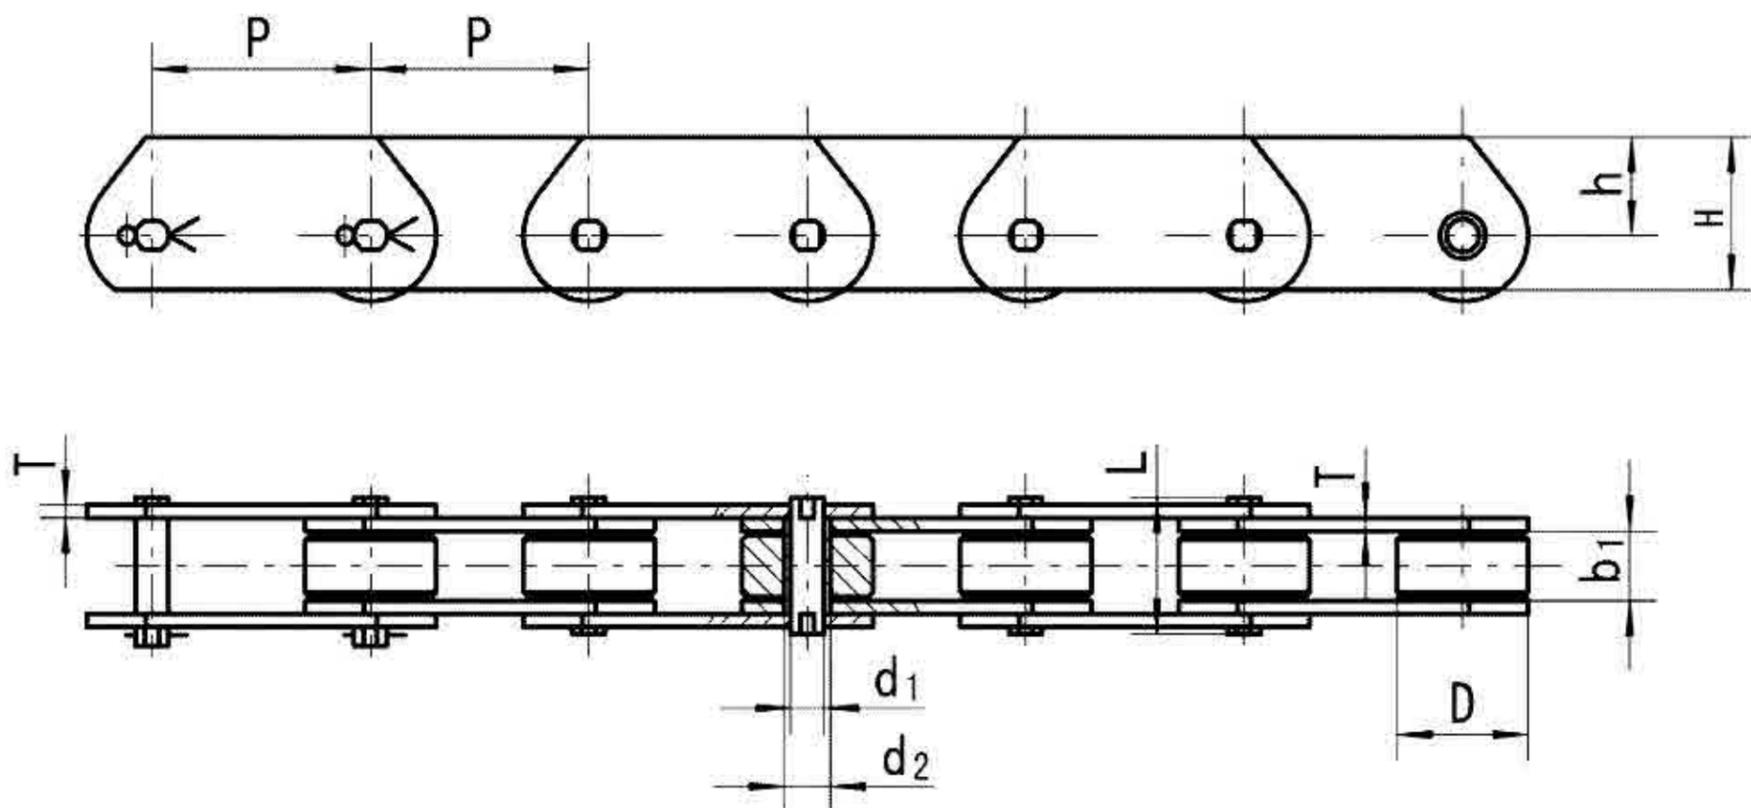

链号 Chain No.	节距 Pitch					内节内宽 Width between inner plates b_1 (min) mm	滚子 Roller D mm	销轴 Pin		链板 Plate			套筒外径 Roller diameter d_2 (max) mm	最小抗拉强度 Ultimate tensile strength	
	P	P	P	P	P			d, mm	L mm	h mm	T mm	H mm		Q_{min} kN	$※Q_{min}$ kN
MT20	40	50	63	80	100	16	25	6	35	16	2.5	25	9	20	32
MT28	50	63	80	100	125	18	30	7	40	20	3	30	10	28	42
MT40	63	80	100	125	160	20	36	8.5	45	22.5	3.5	35	12.5	40	60
MT56	63	80	100	125	160	24	42	10	52	30	4	45	15	56	85
MT80	80	100	125	160	200	28	50	12	62	32.5	5	50	18	80	125
MT112	80	100	125	160	200	32	60	15	73	40	6	60	21	112	175
MT160	100	125	160	200	250	37	70	18	85	45	7	70	25	160	260
MT224	125	160	200	250	315	43	85	21	98	60	8	90	30	224	340
MT315	160	200	250	315	400	48	100	25	112	65	10	100	36	315	520
MT450	200	250	315	400	500	56	120	30	135	80	12	120	42	450	700

空心销轴输送链(MC系列)
Hollow Pin Conveyor Chains (MC series)

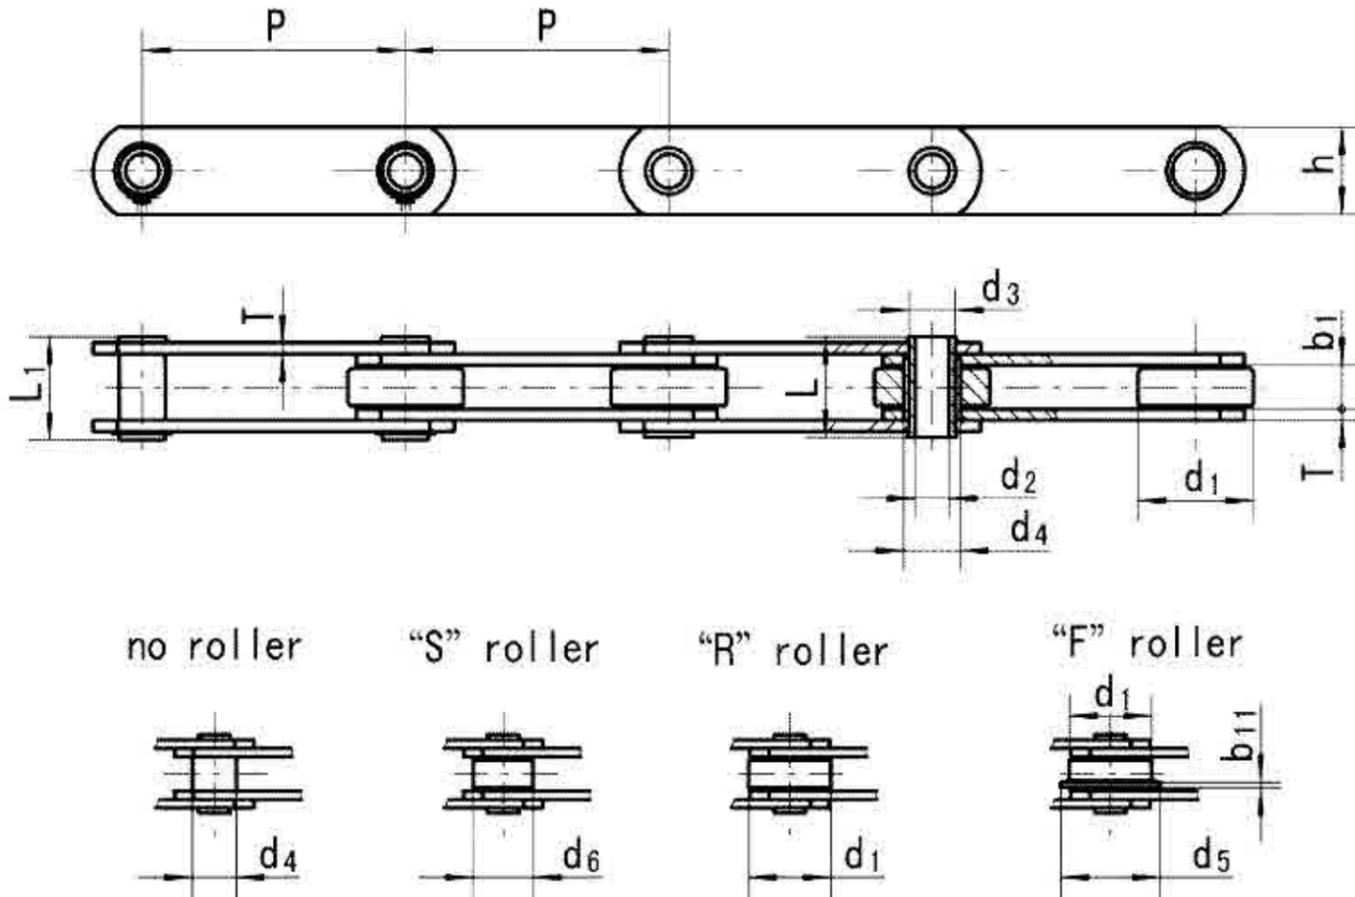


链号 Chain No	节距 Pitch P mm						内节内宽 Width between inner plates b, (min) mm	滚子 Roller				销轴 Pin			
	d ₁ mm	d ₂ mm	d ₃ mm	d ₄ mm	d ₅ mm	d ₆ mm		d ₁₁ mm	d ₂ mm	d ₃ mm	L mm	L ₁ mm			
MC28	63	80	100	125	160	-	20	36	25	45	4.5	13	8.2	36	38.5
MC56	80	100	125	160	200	250	24	50	30	60	5	15.5	10.2	45	47.5
MC112	100	125	160	200	250	315	32	70	42	85	7	22	14.3	62.5	64.3
MC224	160	200	250	315	400	500	43	100	60	120	10	31	20.3	83	85.5

链号 Chain No.	套筒外径 Roller diameter d ₅ (max) mm	链板 Plate		最小抗拉强度 Ultimate tensile strength	
		h mm	T mm	Q _{min} kN	※Q _{min} kN
MC28	17.5	25	3.5	28	40
MC56	21	35	4	56	90
MC112	29	50	6	112	180
MC224	41	70	8	224	350

※Q: Higher breaking load with hardened plates224

FV系列输送链 Conveyor Chains (FV series)

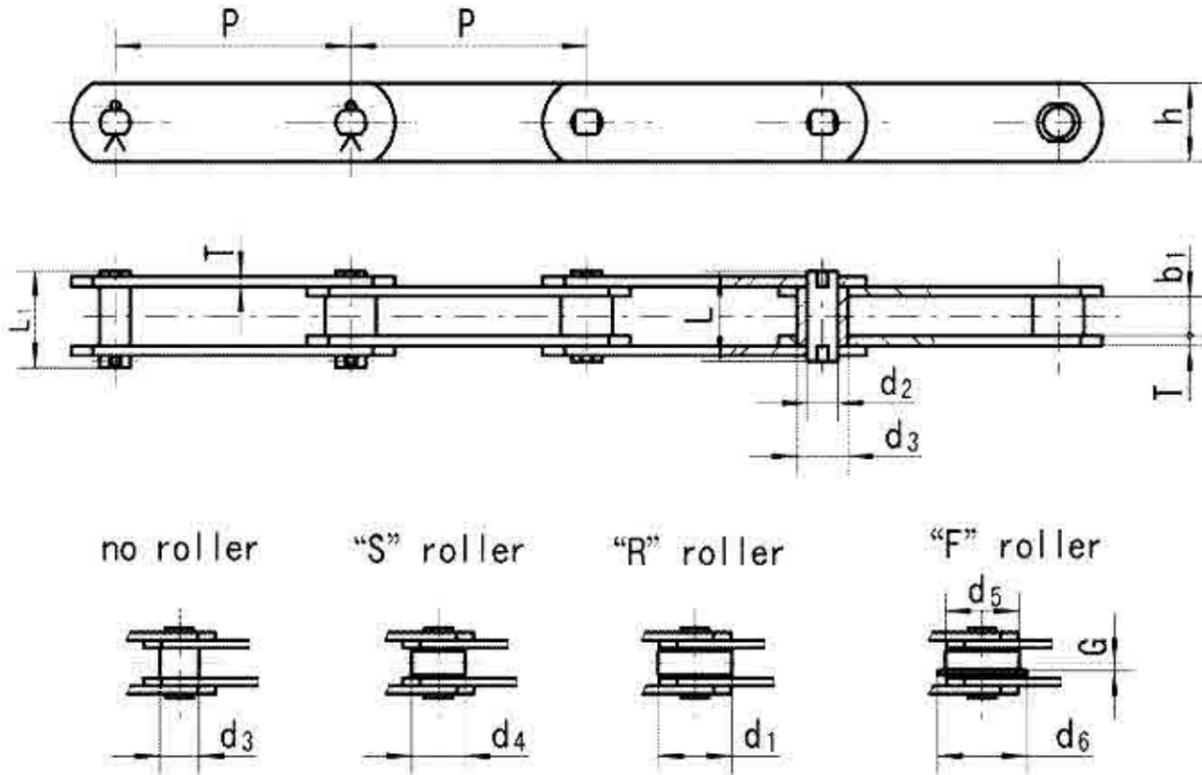


链号 Chain No	节距 Pitch								内节内宽 Width between inner plates b_1 (min) mm	滚子 Roller					销轴 Pin	
	p mm									d_1 mm	d_4 mm	d_5 mm	d_6 mm	G mm	d_2 mm	L mm
FV40	50	63	80	100	125	-	-	18	32	20	40	50	4	10	36	39
FV63	63	80	100	125	160	200	250	22	40	26	50	63	5	12	45	48.5
FV90	63	80	100	125	160	-	-	25	48	30	63	78	6.5	14	53	56.5
FV112	100	125	160	200	250	-	-	30	55	32	72	90	7.5	16	62	66
FV140	100	125	160	200	250	-	-	35	60	36	80	100	9	18	67	71.5
FV180	125	160	200	250	315	-	-	45	70	42	100	125	13	20	86	92
FV250	160	200	250	315	400	-	-	55	80	50	125	155	15	26	97	103.5
FV315	160	200	250	315	400	-	-	65	90	60	140	175	18	30	113	126.5

链号 Chain No.	套筒外径 Roller diameter d_2 (max) mm	链板 Plate		最小抗拉强度 Ultimate tensile strength	
		h mm	T mm	Q_{min} kN	$*Q_{min}$ kN
FV40	15	25	3	40	47
FV63	18	30	4	63	75
FV90	20	35	5	90	115
FV112	22	40	6	112	170
FV140	26	45	6	140	180
FV180	30	50	8	180	250
FV250	36	60	8	250	300
FV315	42	70	10	315	480

※Q: Higher breaking load with hardened plates


FV系列带附件输送链 Conveyor Chains with Attachments (FV series)

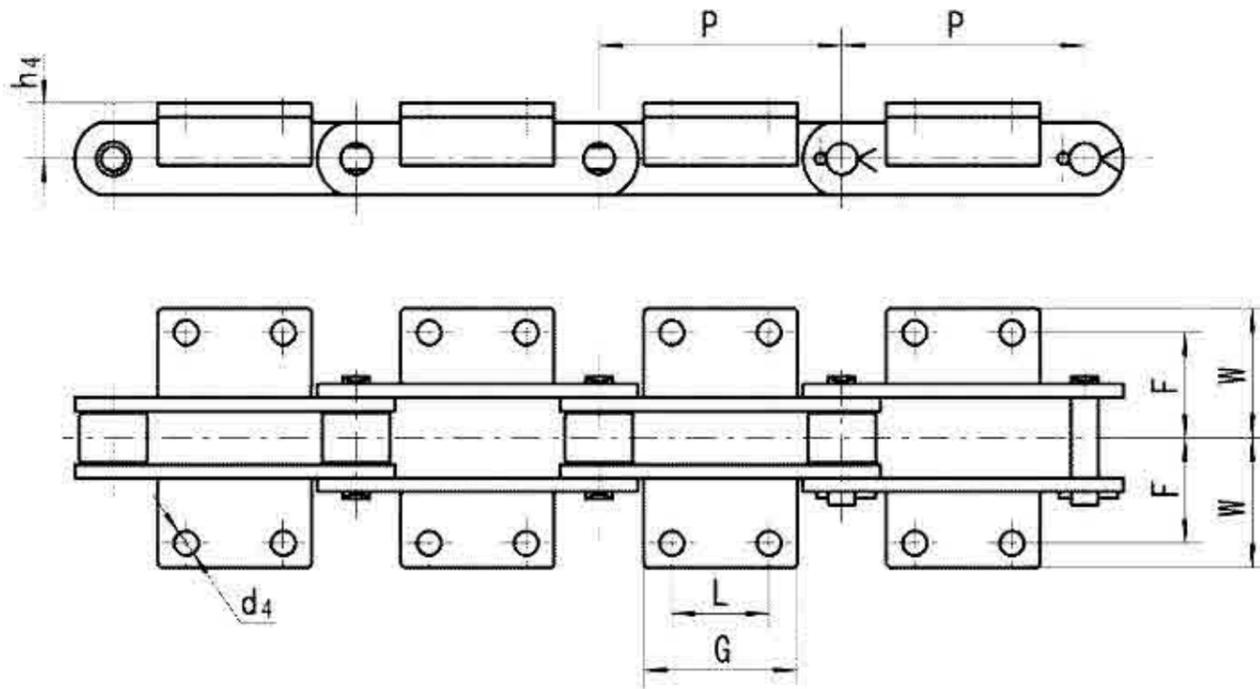

链号 Chain No.	节距 Pitch P mm	L mm	G mm	d ₄ mm	F mm	W mm	h ₄ mm
FV40	50	●	45	6.5	25	40.5	20
	63	●	31				
	80	25	45				
	100	30	50				
	125	30	60				
FV63	63	●	40	8.4	34	50	30
	80	25	45				
	100	30	50				
	125	40	60				
	160	50	70				
FV90	63	●	30	8.4	40	64	35
	80	25	45				
	100	30	50				
	125	40	60				
	160	50	70				
	200	60	80				
	250	65	85				
FV112	100	30	50	11	50	70	40
	125	40	65				
	160	50	75				
	200	65	90				
	250	80	105				

- 附件带一个孔
- Attachment with 1 hole


FV系列带附件输送链 Conveyor Chains with Attachments (FV series)

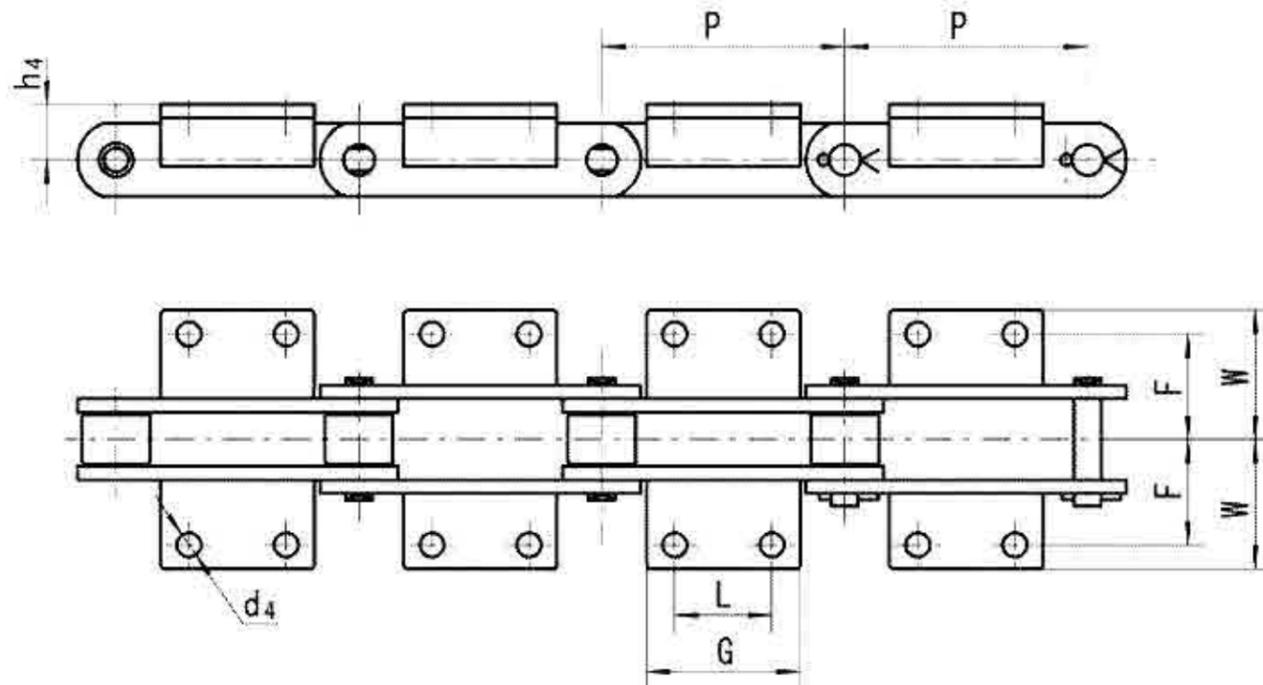

链号 Chain No.	节距 Pitch P mm	L mm	G mm	d ₄ mm	F mm	W mm	h ₄ mm
FV140	100	30	55	11	50	81	45
	125	40	65				
	160	50	75				
	200	65	90				
	250	80	105				
FV180	125	35	63	13	64	91	45
	160	50	80				
	200	65	95				
	250	80	110				
	315	100	130				
FV250	160	50	80	14	69	106	55
	200	65	95				
	250	80	110				
	315	100	130				
	400	100	130				
FV315	160	●	50	14	85	130	60
	200	65	95				
	250	80	110				
	315	100	130				
	400	100	130				

- 附件带一个孔
- Attachment with 1 hole

FVT系列输送链
Conveyor Chains (FVT series)

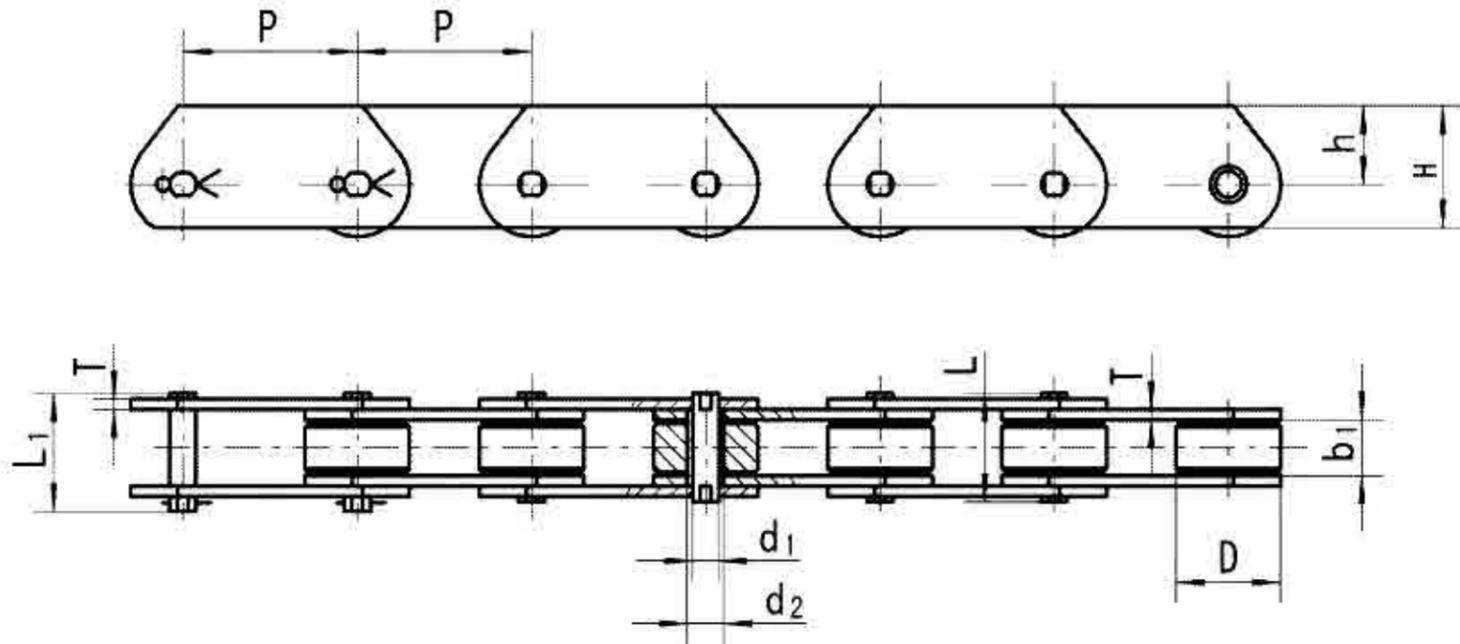


链号 Chain No.	套筒外径 Roller diameter d_2 (max) mm	链板 Plate			最小抗拉强度 Ultimate tensile strength	
		h mm	t mm	H mm	Q_{min} kN	$*Q_{min}$ kN
FVT40	15	22.5	3	35	40	47
FVT63	18	25	4	40	63	75
FVT90	20	27.5	5	45	90	115
FVT112	22	30	6	50	112	170
FVT140	25	37.5	6	60	140	180
FVT180	30	45	8	70	180	250
FV250	36	50	8	80	250	300
FV315	42	55	10	90	315	480

链号 Chain No	节距 Pitch P mm							内节内宽 Width between inner plates b_1 (min) mm	滚子 Roller D mm	销轴 Pin		
	d_1 mm	L mm	L_1 mm									
FVT40	50	63	80	100	125	-	-	18	32	10	36	39
FVT63	63	80	100	125	160	-	-	22	40	12	45	48.5
FVT90	63	80	100	125	160	200	250	25	48	14	53	56.5
FVT112	100	125	160	200	250	-	-	30	55	16	62	66
FVT140	100	125	160	200	250	-	-	35	60	18	67	71.5
FVT180	125	160	200	250	315	-	-	45	70	20	86	92
FVT250	160	200	250	315	-	-	-	55	80	26	97	103.5
FVT315	160	200	250	315	400	-	-	65	90	30	113	126.5

*Q: Higher breaking load with hardened plates


FVC系列空心销轴输送链 Hollow Pin Conveyor Chains (FVC series)

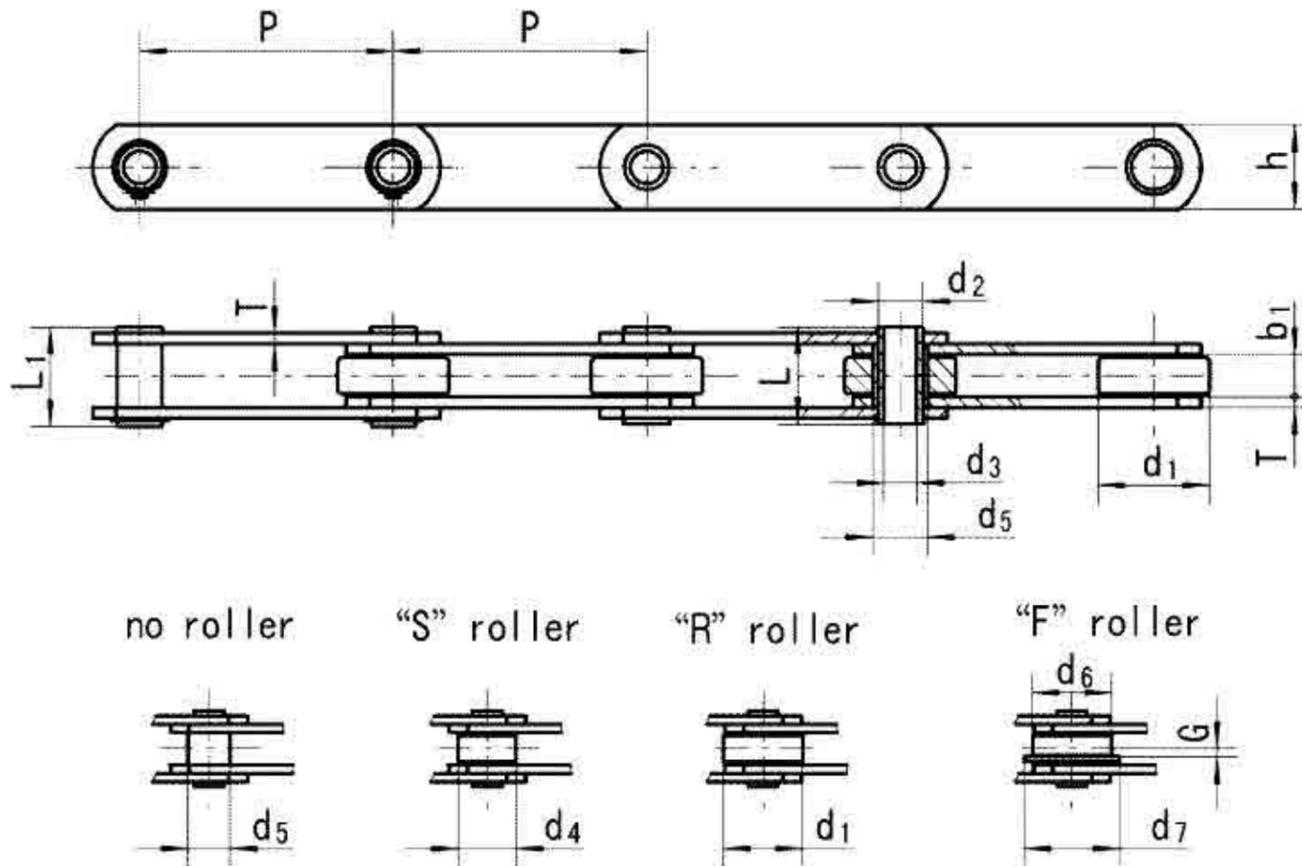

链号 Chain No.	节距 Pitch								内节内宽 Width between inner plates b _i (min) mm	滚子 Roller					链板 Plate	
	P mm		P mm		P mm		P mm			d ₁ mm	d ₂ mm	d ₃ mm	d ₅ mm	G mm	d ₂ mm	L mm
FVC63	63	80	100	125	160	-	-	22	40	26	50	63	5	30	4	
FVC90	63	80	100	125	160	200	250	25	48	30	63	78	6.5	35	5	
FVC112	100	125	160	200	250	-	-	30	55	32	72	90	7.5	40	6	
FVC140	100	125	160	200	250	-	-	35	60	36	80	100	9	45	6	
FVC180	125	160	200	250	315	-	-	45	70	42	100	125	13	50	8	
FVC250	160	200	250	315	400	-	-	55	80	50	125	155	15	60	8	
FVC315	160	200	250	315	400	-	-	65	90	60	140	175	18	70	10	

链号 Chain No.	套筒外径 Roller diameter d ₁ (max) mm	销轴 Pin					最小抗拉强度 Ultimate tensile strength Q _{min} kN
		d ₂ mm	d ₃ mm	L mm	L _i mm		
FVC63	18	12	8	45	50.5	46	
FVC90	20	14	10	53	56.5	73	
FVC112	22	16	11	62	63	90	
FVC140	26	18	12	67	68.5	110	
FVC180	30	20	14	86	88	145	
FVC250	36	26	18	97	103.5	215	
FVC315	42	30	20	117	121.5	295	

Z 系列输送链 Conveyor Chains (Z series)

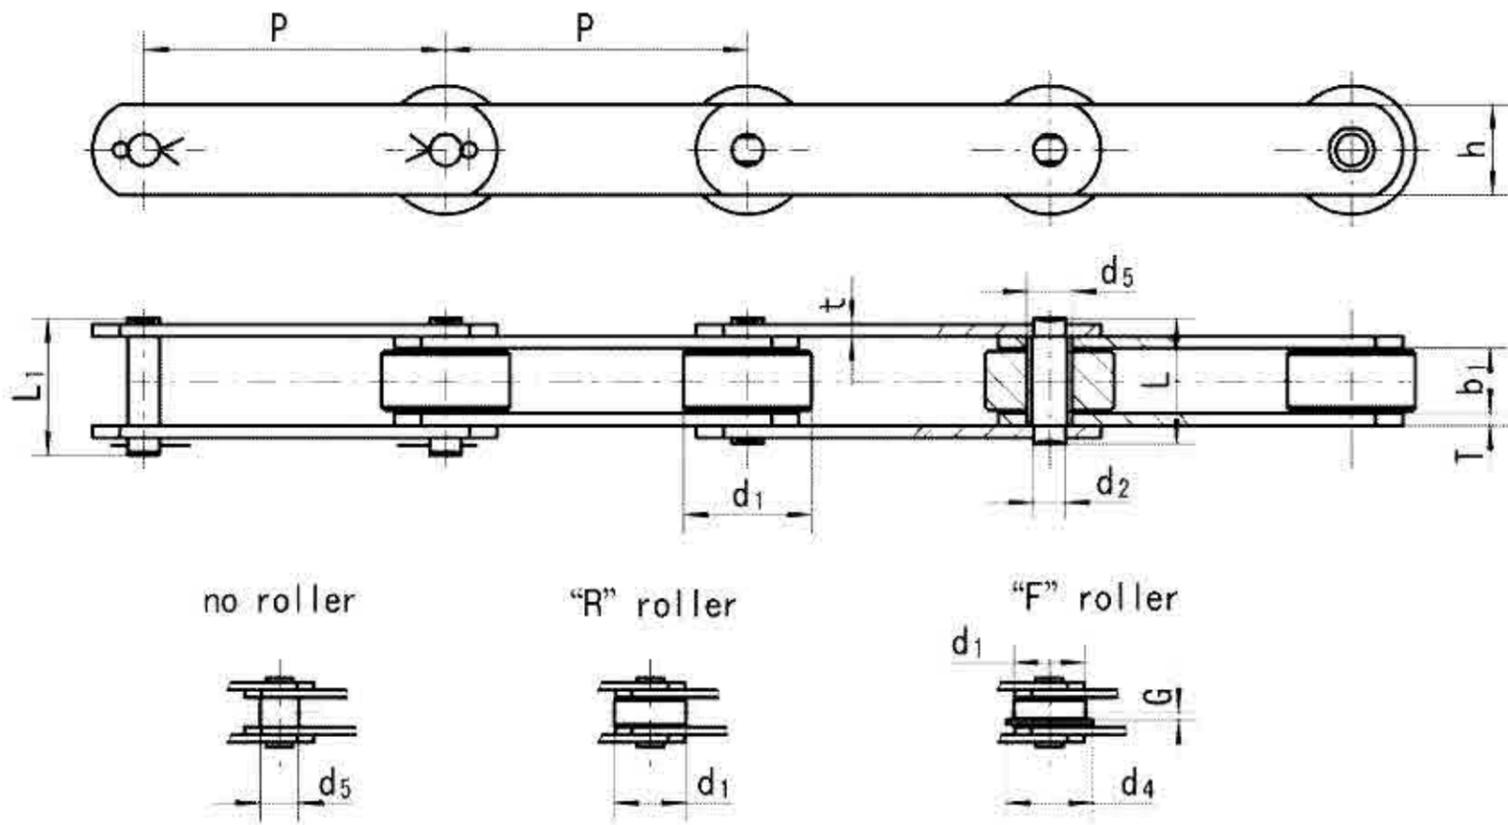


链号 Chain No.	套筒外径 Roller diameter d_5 (max) mm	销轴 Pin			最小抗拉强度 Ultimate tensile strength	
		d_2 mm	L mm	L_1 mm	Q_{min} kN	$※Q_{min}$ kN
Z40	17	14	37	40.5	40	50
Z100	23	19	45	50.5	100	130
Z160	33	26.9	58	63.5	156	200
Z300	38	32	84	94	300	380

链号 Chain No	节距 Pitch P mm								内节内宽 Width between inner plates b_1 (min) mm	滚子 Roller			链板 Plate	
	d_1 mm	d_2 mm	G mm	h mm	t/T mm									
Z40	50.8	63.5	76.2	88.9	101.6	127	152.4	15	31.75	40	2.5	25	4	
Z100	76.2	88.9	101.6	127	152.4	177.8	203.2	19	47.5	60	3.5	40	4/5	
Z160	101.6	127	152.4	177.8	203.2	228.6	254	26	66.7	82	3.5	50	5/7	
Z300	152.4	177.8	203.2	254	304.8	-	-	38	88.9	114	8.5	60	8/10	

※Q: Higher breaking load with hardened plates


Z系列带附件输送链 Conveyor Chains with Attachments (Z series)

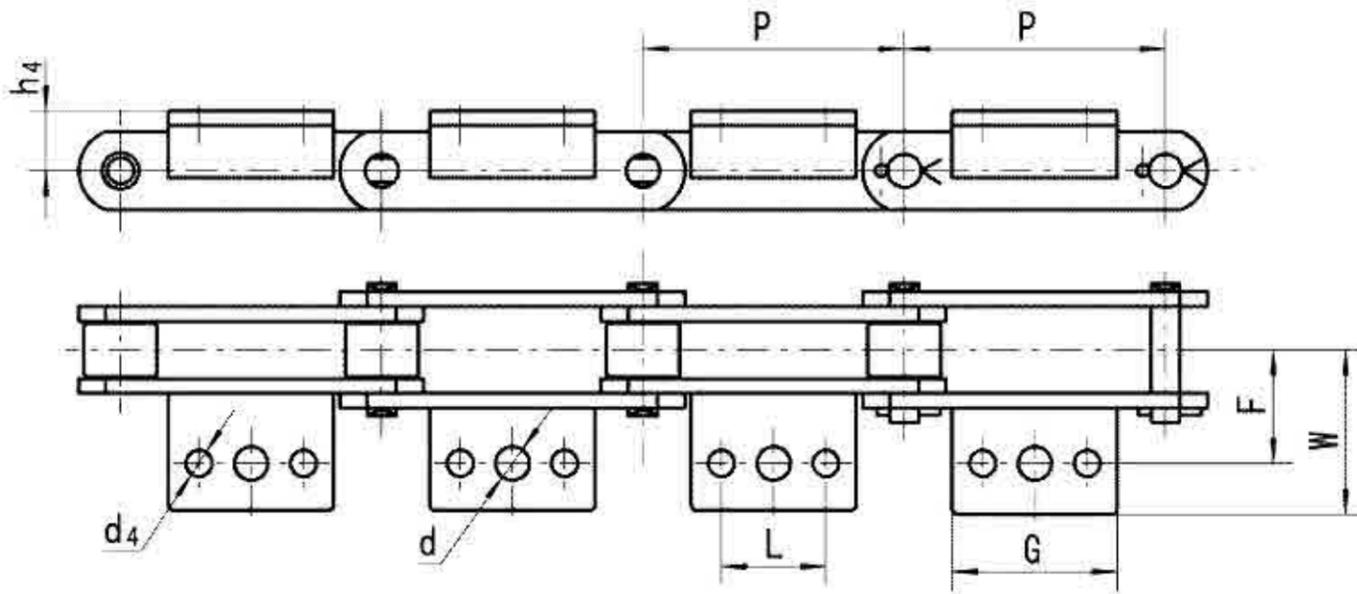

链号 ISO Chain No.	节距 Pitch P mm	L mm	G mm	d mm	d _i mm	F mm	W mm	h _i mm	
Z40	△	50.8	-	45	10.7	9.3	38.1	19	
	△○	63.5	22.2	43					64.5
	△○	76.2							56
	▲	88.9	31.8	50					68
	▲	101.6							56
	▲	127	57.2	84					55
	▲	152.4							56
Z100	△	76.2	-	30	14	10.5	44.5	32	
	△	88.9	31.8	64					65
	▲	101.6							
	△○	127	114.5	110					
	▲	152.4							80
	△○	177.8	203.2	203.2					
	△○	203.2							80
Z160	△	101.6	-	35	15.5	12.3	54	38	
	△○	127	31.7	56					77
	△○	152.4							
	△○	177.8	100	130					
	△○	203.2							150
	△○	228.6	135	170					
	△○	254							135
Z300	△	152.4	38.1	70	17	14	73	51	
	△	177.8							
	△○	203.2	76.2	100					
	△○	254							90
	△○	304.8	190	225					

△Attachment with one hole, ○Attachment with two hole, ▲Attachment with three hole.

ZE 系列输送链
Conveyor Chains (ZE series)

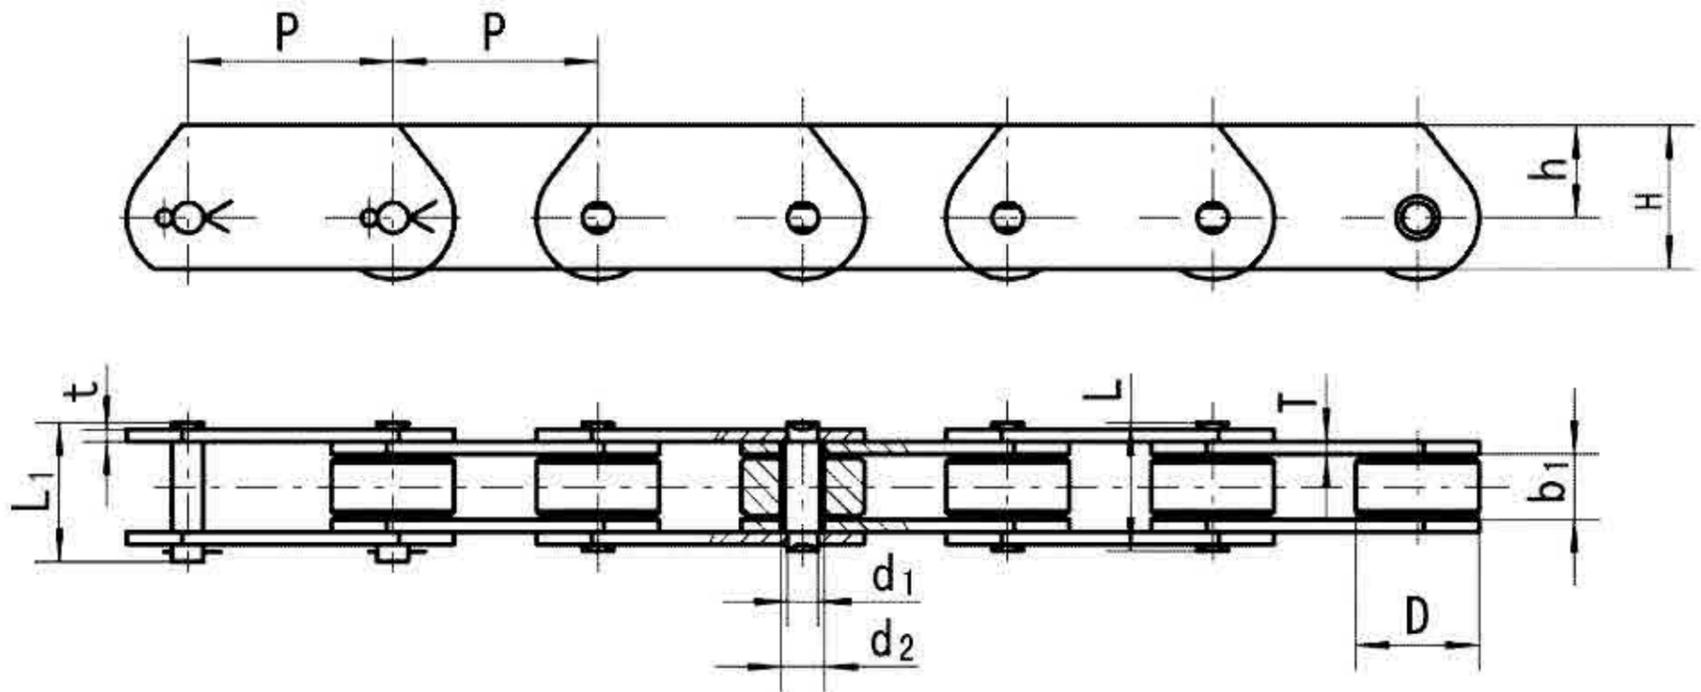


链号 Chain No.	套筒外径 Roller diameter d_2 (max) mm	销轴 Pin			最小抗拉强度 Ultimate tensile strength	
		d_1 mm	L mm	L_1 mm	Q_{min} kN	$*Q_{min}$ kN
ZE40	17	14	37	40.5	40	60
ZE100	23	19	45	50.5	100	160
ZE160	33	26.9	58	63.5	160	200
ZE300	38	32	84	94	300	380

链号 Chain No.	节距 Pitch P mm								内节内宽 Width between inner plates b_1 (min) mm	滚子 Roller D mm	链板 Plate		
	h mm	H mm	t/T mm										
ZE40	50.8	63.5	76.2	88.9	101.6	127	152.4	15	31.75	27	40	4	
ZE100	76.2	88.9	101.6	127	152.4	177.8	203.2	19	47.5	30	50	4/5	
ZE160	101.6	127	152.4	177.8	203.2	228.6	254	26	66.7	45	70	5/7	
ZE300	152.4	177.8	203.2	254	304.8	-	-	38	88.9	60	90	8/10	

*Q: Higher breaking load with hardened plates

ZC系列输送链 Hollow Pin Conveyor Chains (ZC Series)


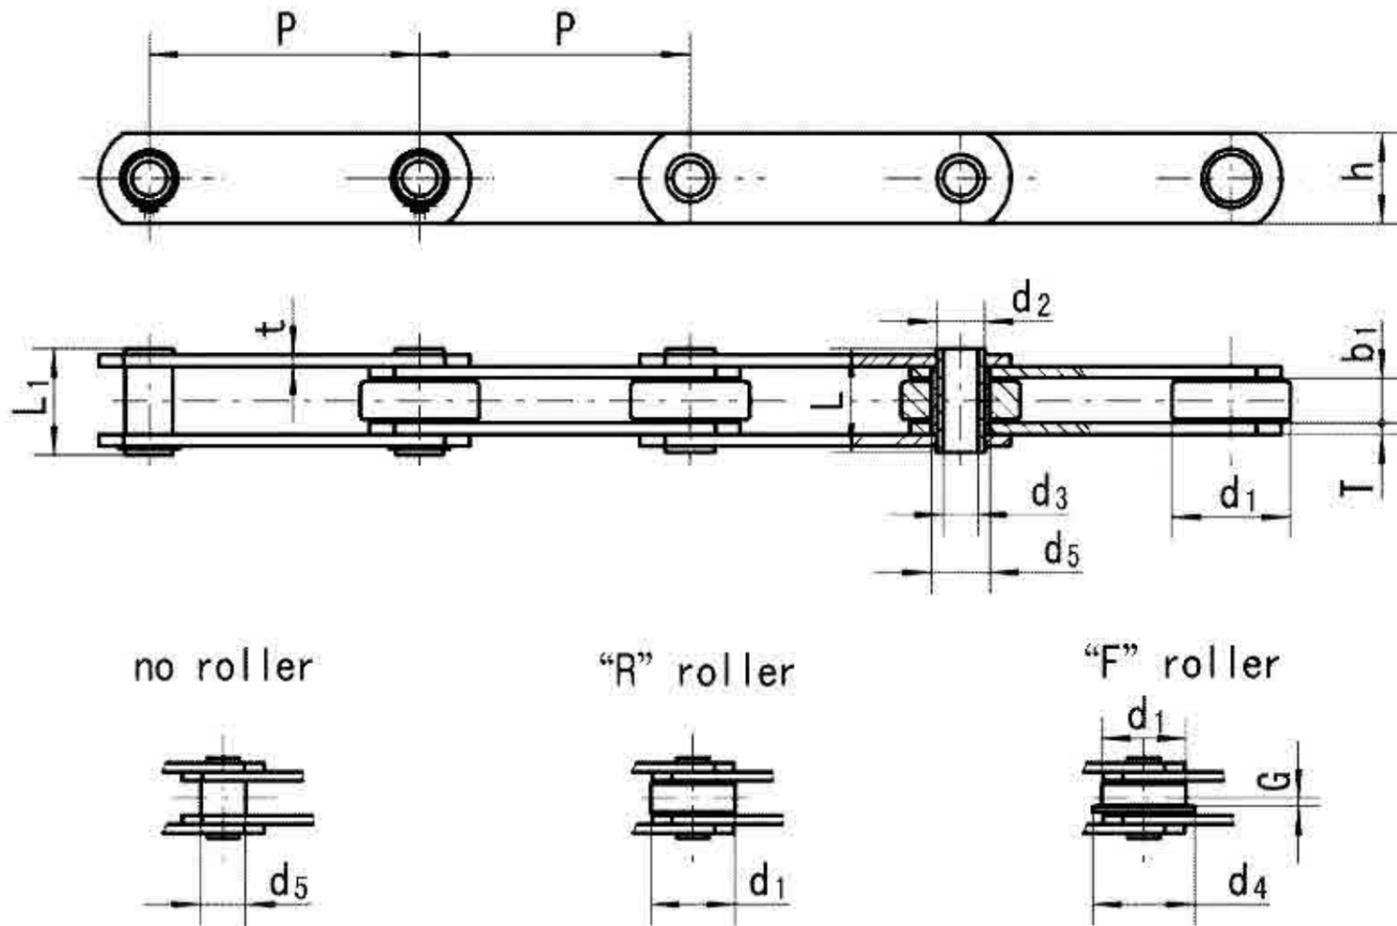


链号 Chain No.	套筒外径 Roller diameter d_2 (max) mm	d_2 mm	销轴 Pin			最小抗拉强度 Ultimate tensile strength	
			d_3 mm	L mm	L_1 mm	Q_{min} kN	$※Q_{min}$ kN
ZC21	11	9	6.5	26	27.5	21	27
ZC40	17	14	10.2	36.4	37.7	40	50
ZC60	23	19	13.2	45	46.5	60	120
ZC150	33	26.9	20.2	58	60.5	150	190
ZC300	38	32	22.5	83	85	300	380

链号 Chain No.	节距 Pitch P mm							内节内宽 Width between inner plates b_1 (min) mm	滚子 Roller D mm			链板 Plate	
	d_1 mm	d_2 mm	G mm	h mm	t/T mm	d_1 mm	d_2 mm		G mm	h mm	t/T mm		
ZC21	38.1	50.8	63.5	76.2	-	-	-	12.7	25.4	-	-	18	2.5
ZC40	50.8	63.5	76.2	88.9	101.6	127	152.4	15	31.75	40	2.5	25	4
ZC60	76.2	88.9	101.6	127	152.4	177.8	203.2	19	47.5	60	3.5	40	4/5
ZC150	101.6	127	152.4	177.8	203.2	228.6	254	26	66.7	82	4	50	5/7
ZC300	152.4	177.8	203.2	254	304.8	-	-	38	88.9	114	8.5	60	8/10


※Q: Higher breaking load with hardened plates

重载传动用弯板链
Heavy-Duty Cranked-Link Chains

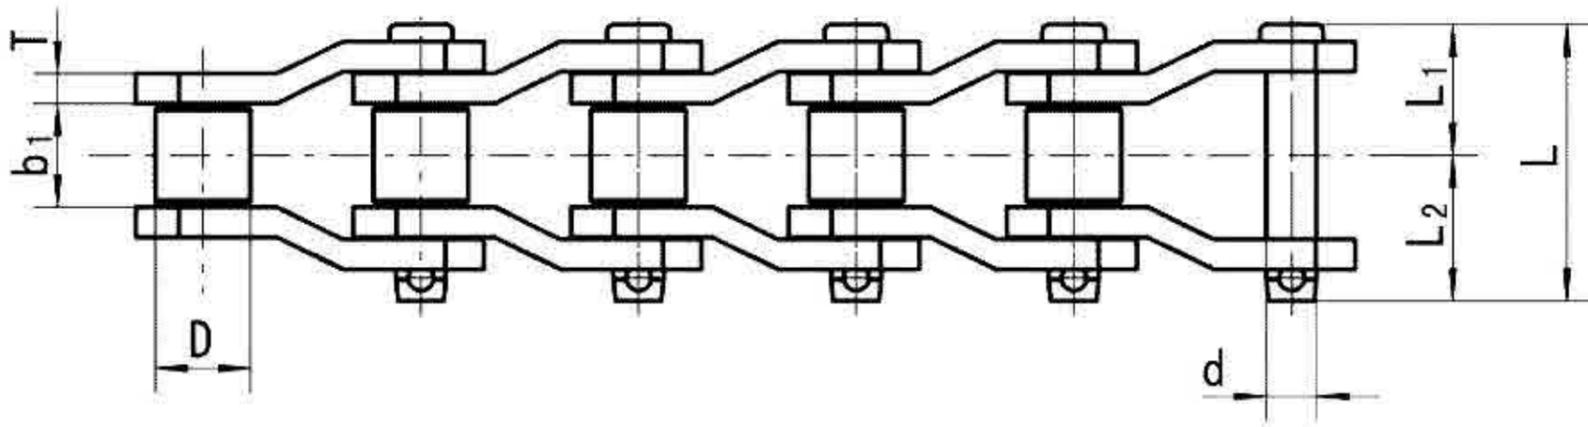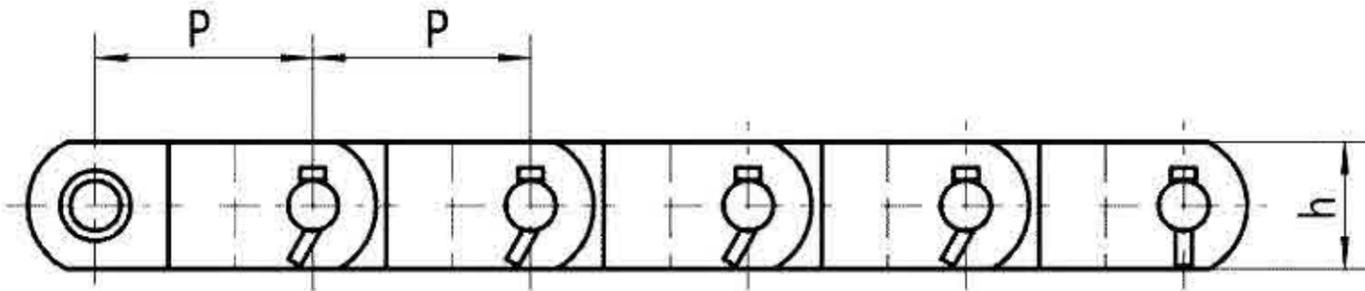


链号 Chain No.	节距 Pitch P mm	窄端内宽 Inside width at narrow end b ₁ (min) mm	滚子外径 Roller diameter D(max) mm	链板 Plate		销轴 Pin				最小抗拉强度 Ultimate tensile strength Q(min) kN	每米净重 weight per meter q kg/m
				h mm	T mm	d mm	L mm	L ₁ mm	L ₂ mm		
2010	63.5	38.1	31.75	47.8	7.9	15.9	89	41.9	46.2	254	13.1
2512	77.9	39.6	41.28	57	9.5	19.05	150	46.1	53.5	300	18.1
2814	88.9	36.6	44.45	58	12.7	22.23	117.6	53.6	62	516	25.3
3315	103.45	49.3	45.24	63.5	14.2	23.85	130	62.9	71.4	560	27.8
3618	114.3	52.3	57.15	79.2	14.3	27.17	138	63.8	72.2	760	38.1
4020	127	69.9	63.5	88.9	15.7	31.78	185.7	78.5	84.5	1156	51.3
4824	152.4	74.6	76.2	101.6	19.05	37.9	182.2	85.2	97	1400	69.1

空心销轴链
Hollow Pin Conveyor Chains

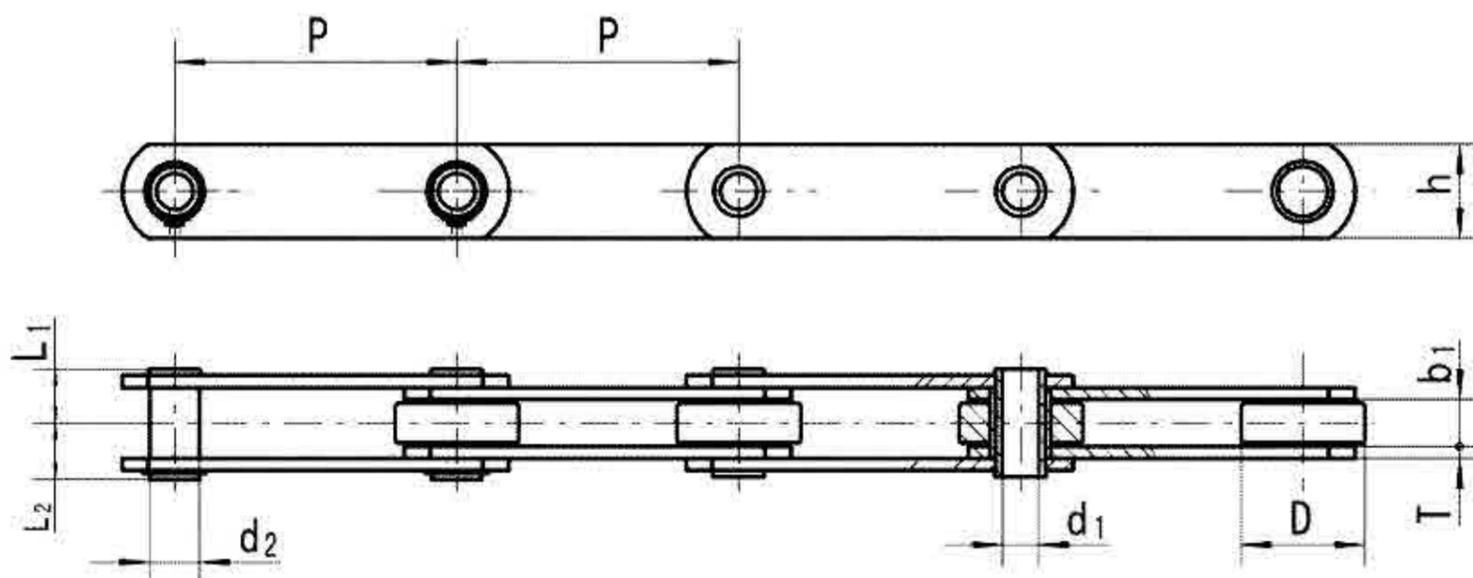


链号 Chain No.	节距 Pitch P mm	内节内宽 Width between inner plates b1(min) mm	滚子外径 Roller diameter D(max) mm	销轴 Pin				链板 Plate		最小抗 拉强度 Ultimate tensile strength Q(min) kN	许用工作 载荷 Rated working load kN	每米净重 Weight per meter q kg/m
				d1 (min) mm	d2 mm	L1 mm	L2 mm	h mm	t/T mm			
HC120030	76.2	19	47.6	13.2	19.05	23.1	23.9	38.1	3.8/5.1	54	3.8	7.46
HC240040	101.6	25.4	66.7	19.56	26.92	31.5	32	50.8	6.5/7.8	54	8.7	14.28
HC240060	152.4	25.4	66.7	19.56	26.92	31.5	32	50.8	6.5/7.8	124.5	8.7	12.05
DC180060HP	152.4	19.05	47.6	13.2	19.05	23.1	23.9	39	5.08	66.6	5.5	5.35
JH4P18HP	101.6	19.1	47.6	13.2	19.05	23.1	23.9	39	5.08	66.6	5.5	8.03
HB80	80	20	50	18.5	24	22	23.5	40	5.0/4.0	79	6.3	6.81
HP100	100	22	45	12	16	22.5	23.5	35	5.0	75	6	6.2
HP100F1	100	22	45	12	18	23	24.2	35	5.0	75	6	6.15

开沟机链 Trencher Chains

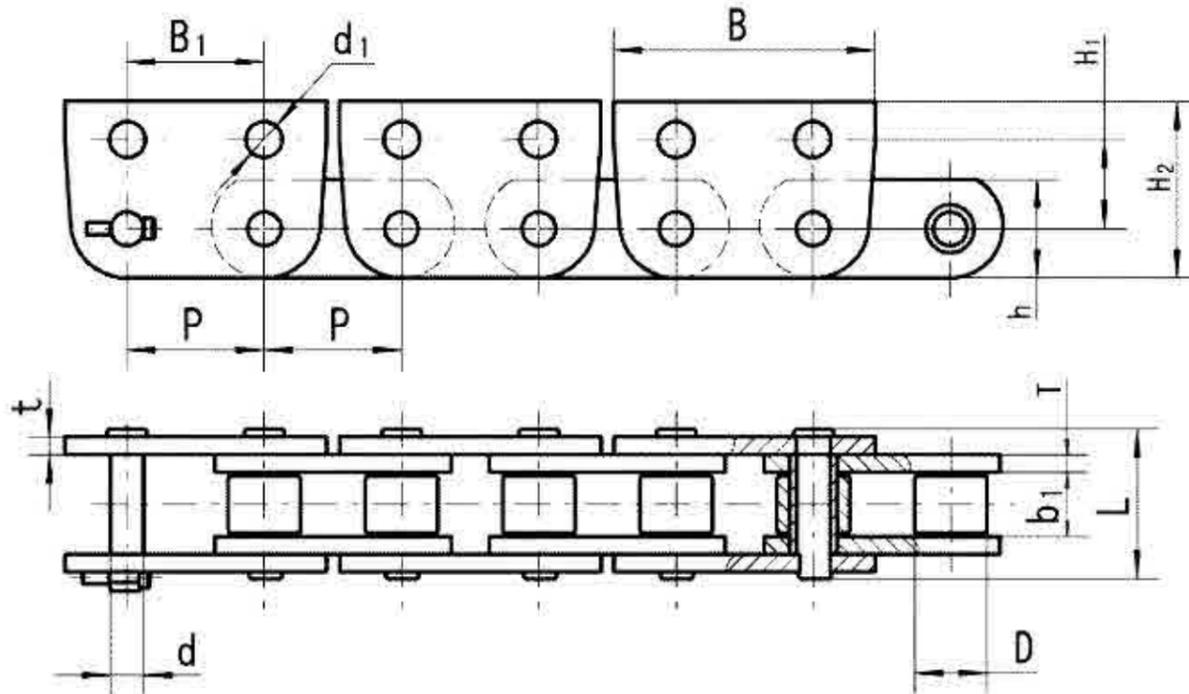


链号 Chain No.	节距 Pitch P mm	内节内宽 Width between inner plates b1(min) mm	滚子外径 Roller diameter D(max) mm	销轴 Pin		链板 Plate						最小抗 拉强度 Ultimate tensile strength Q(min) kN	许用工作 载荷 Rated working load kN	每米净重 Weight per meter q kg/m	
				d mm	L mm	h mm	t/T mm	H ₁ mm	H ₂ mm	B ₁ mm	B ₂ mm				d ₁ mm
SC3067TV	77.9	36.6	41.28	19.05	90.65	56	10	50.8	100.4	77.6	148.6	20.55	489	52	25.94

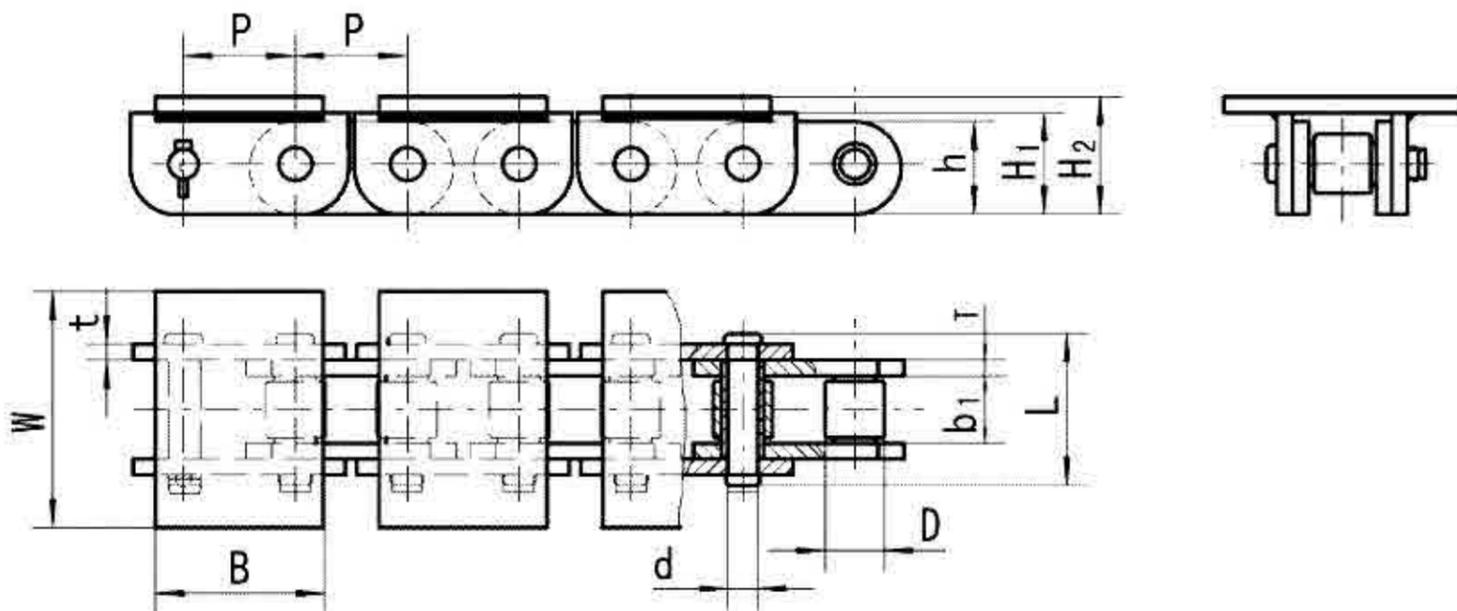


链号 Chain No.	节距 Pitch P mm	内节内宽 Width between inner plates b1(min) mm	滚子外径 Roller diameter D(max) mm	销轴 Pin		链板 Plate				附板 Attachment Plate			最小抗 拉强度 Ultimate tensile strength Q(min) kN	许用工作 载荷 Rated working load kN	每米净重 Weight per meter q kg/m
				d mm	L mm	h mm	t/T mm	H ₁ mm	H ₂ mm	B mm	W mm	t ₁ mm			
SH1654TR	42.01	25.4	22.23	11.1	58.9	34.8	6	38.1	44.1	63	88.9	6	151.14	16	11.233

手套链 Conveyor Chains for Glove Industry

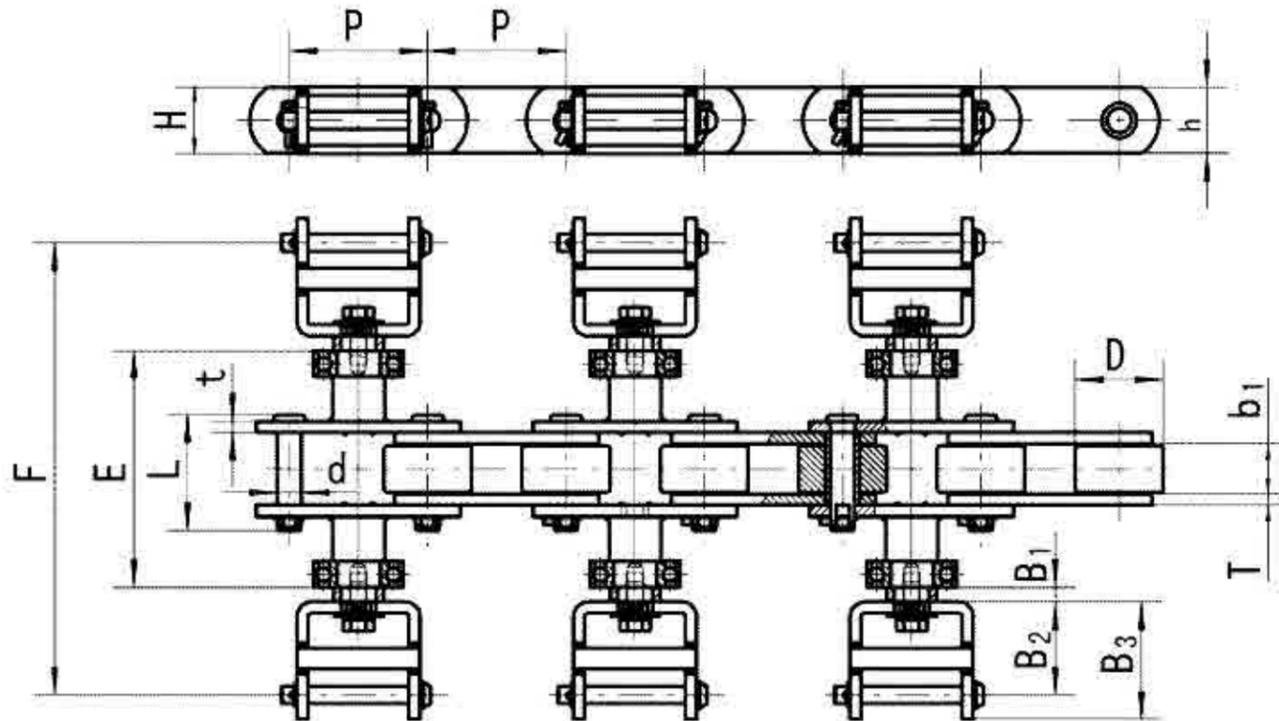


链号 Chain No.	节距 Pitch P mm	内节内宽 Width between inner plates b1(min) mm	滚子外径 Roller diameter D(max) mm	销轴 Pin		链板 Plate		附件尺寸 Attachment Parameter						最小抗拉强度 Ultimate tensile strength Q(min) kN	许用工作 载荷 Rated working load kN	每米净重 Weight per meter q kg/m
				d mm	L mm	h mm	t/T mm	B ₁ mm	B ₂ mm	B ₃ mm	E mm	F mm	H mm			
SSC3	80	29	50.8	14	69.5	38	6.5	8.5	53	69.5	137	260	39	125	11	

块状链条 Block Chain


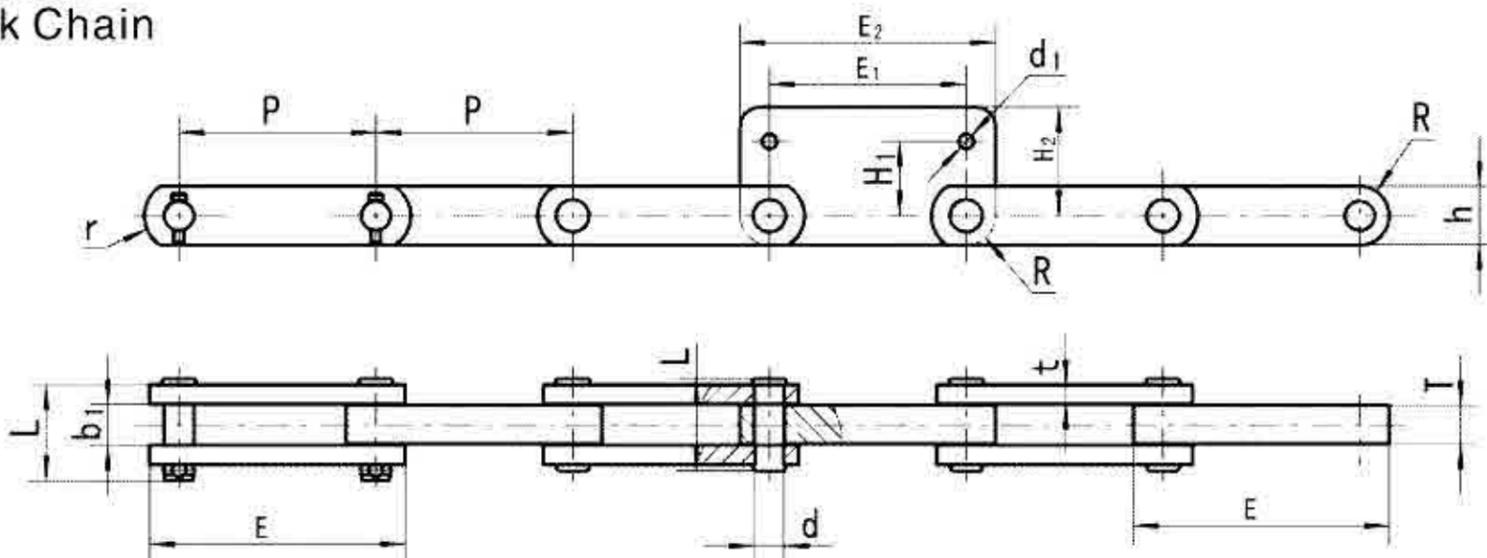


链号 Chain No.	节距 Pitch P mm	外节内宽 Width between Outer plates b.(min) mm	销轴 Pin		链板 Plate			附件尺寸 Attachment Parameter						最小抗拉强度 Ultimate tensile strength Q(min) kN	许用工作 载荷 Rated working load kN	每米净重 Weight per meter q kg/m
			d mm	L mm	h mm	t/T mm	r/R mm	E mm	H ₁ mm	h ₂ mm	E ₁ mm	E ₂ mm	d ₁ mm			
17713A-2001	254	53.2	38.1	119	76	25/50	43/38	330	96	140	254	330	19	1300	143	39.07

板式销轴链
Leaf Pin Chains

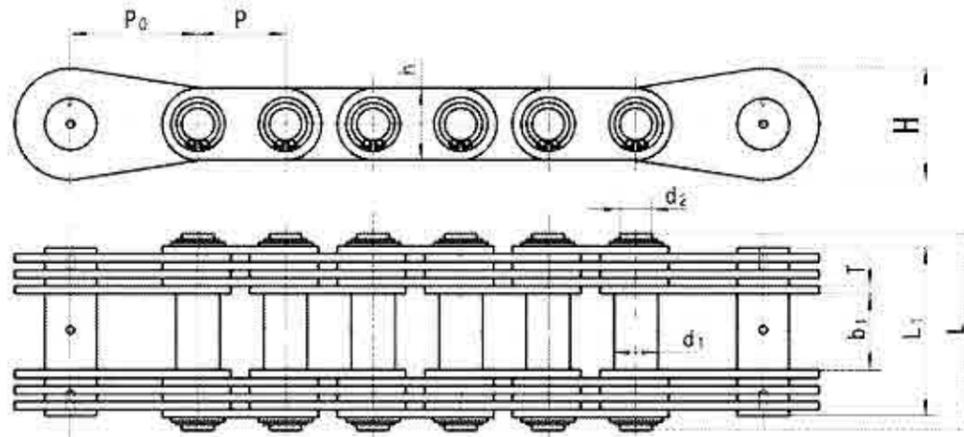


链号 Chain No.	组装形式 Combination type	节距 Pitch		销轴直径 Pin diameter d ₂ mm	其它参数 Data of other						销轴长度 Length of pin L(mm)	抗拉强度 Tensile strength Q minkN	每米净重 Weight per meter q kg/m
		P (mm)	P ₀ (mm)		d ₁ (mm)	h ₂ (mm)	H (mm)	b ₁ (mm)	L ₁ (mm)	T (mm)			
2146A	3×3	110	160	45	55	90	140	90	205	8	234	1100	77.8
2146B	3×3	110	160	45	50	90	140	90	226	10	236	1250	89.21
2146C	3×3	110	160	45	50	85	140	80	226	11	238	1850	88.97
B108	4×4	80	90	32	36	60	90	60	168	5	164	500	39.58

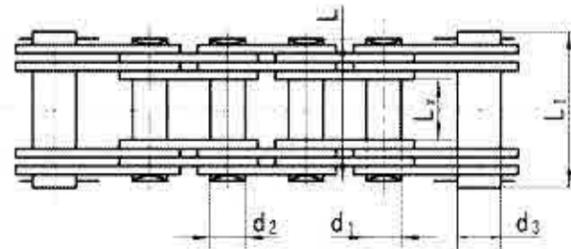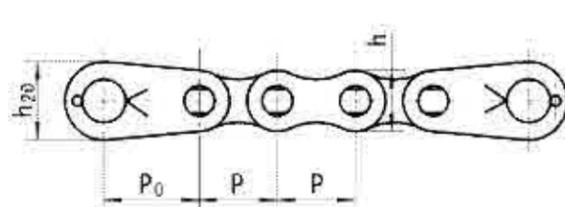


链号 Chain No.	组装形式 Combination type	节距 Pitch		销轴直径 Pin diameter d ₂ mm	其它参数 Data of other						销轴长度 Length of pin L(mm)	抗拉强度 Tensile strength Q minkN	每米净重 Weight per meter q kg/m
		P (mm)	P ₀ (mm)		d ₁ (mm)	h ₂ (mm)	H (mm)	b ₁ (mm)	L ₁ (mm)	T (mm)			
2159	2×2	110	-	42	48	-	82	-	62	-	219	1600	76.52
2127	2×2	180	-	60	70	-	120	-	66	-	232	2200	110
2156	2×2	200	-	65	75	-	140	-	90	276	286	3900	157.1
2142	2×2	200	-	70	80	-	140	-	90	-	285	3300	159.5
2138	2×2	200	-	45	52	-	90	-	60	-	230	1700	73
2136	2×2	250	-	75	84	-	150	-	100	-	312	4000	184
2148	3×3	110	-	40	47	-	75	-	60	-	220	1600	73.75
2121	3×3	110	-	44	50	-	90	-	90	-	236	2500	82
2152	3×3	110	-	45	55	-	88	-	55	-	200	1100	85.12
2134	3×3	120	-	48	56	-	100	-	110	-	300	2200	118
2131	3×3	170	-	60	70	-	130	-	135	-	403	4000	135
2157	4×4	80	-	28	32	-	52	-	50	-	162	650	31.77
2141	4×4	90	110	35	40	-	70	90	70	189	204	800	58.6
2124	4×4	140	165	55	70	-	110	140	120	340	340	2500	147
2128	4×4	240	-	70	85	-	160	-	100	-	306	6700	182
2104	2×2	45	55	15	17	21	37	45	30	78	68	100	7
2105	3×3	50	60	18	22	26	38	50	36	90	94	160	11.5
2106	3×3	60	70	22	26	34	46	60	45	122	120	250	20.5
2107	4×4	70	85	28	32	40	52	70	50	153	150	370	29
2108	4×4	80	95	32	36	45	60	80	60	170	170	500	38

板式销轴链
Leaf Pin Chains

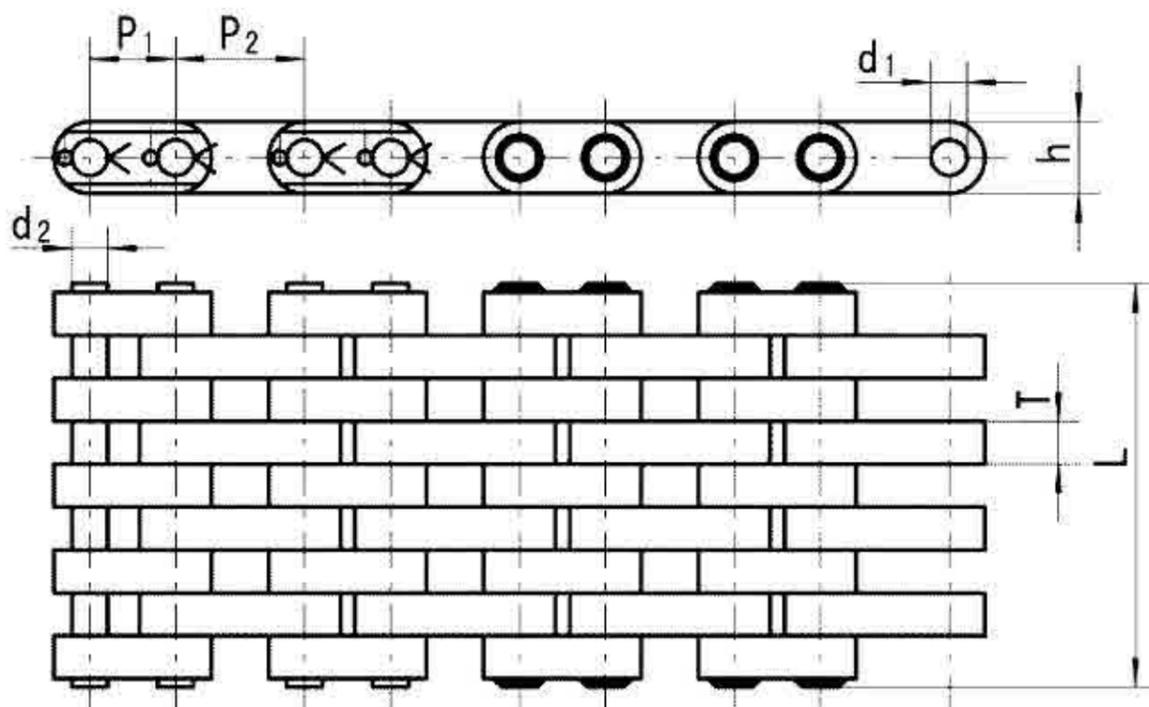


链号 Chain No.	节距 Pitch P_1 (mm)	节距 Pitch P_2 (mm)	组装形式 Combination type	铰接连接 链板孔径 Inside plate hole dia. d_1 (mm)	销轴直径 Dia. of pin d_2 (mm)	销轴长度 Length of pin L (mm)	链板厚度 Thickness of sidebar T (mm)	链板高度 Height of sidebar h (mm)	抗拉强度 Tensile strength Q (kN)
M-A3	60	90	4×5	25.15	25.1	284	30	50	1960
M-A3	60	90	6×7	25.15	25.1	372.5	30	50	2831

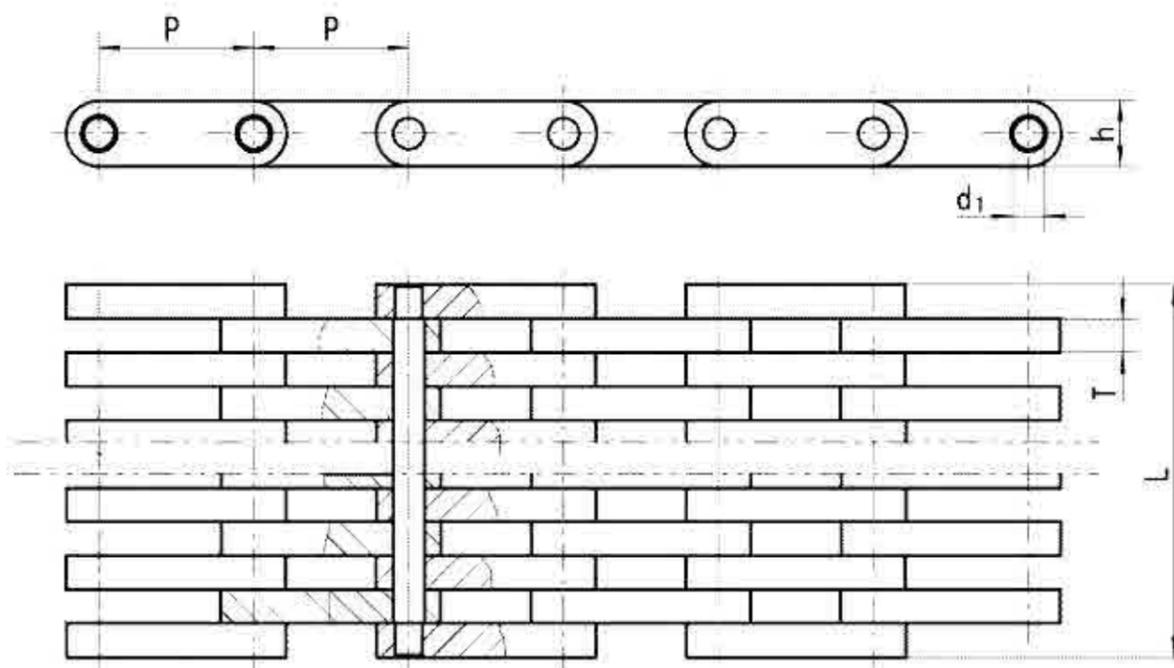


链号 Chain No.	节距 Pitch P_1 (mm)	组装形式 Combination type	铰接连接 链板孔径 Inside plate hole dia. d_1 (mm)	销轴直径 Dia. of pin d_2 (mm)	销轴长度 Length of pin L (mm)	链板厚度 Thickness of sidebar T (mm)	链板高度 Height of sidebar h (mm)	抗拉强度 Tensile strength Q (kN)	每米重量 Weight per meter Q (kg/m)
9JH72T01	150	17×18	30.1	30	1151.7	32.8	63.5	9000	381
9JH11T01	150	11×12	30.1	30	756.9	32.8	63.5	5800	262

钢板输送链
Conveyor Chains of Steel Sheet

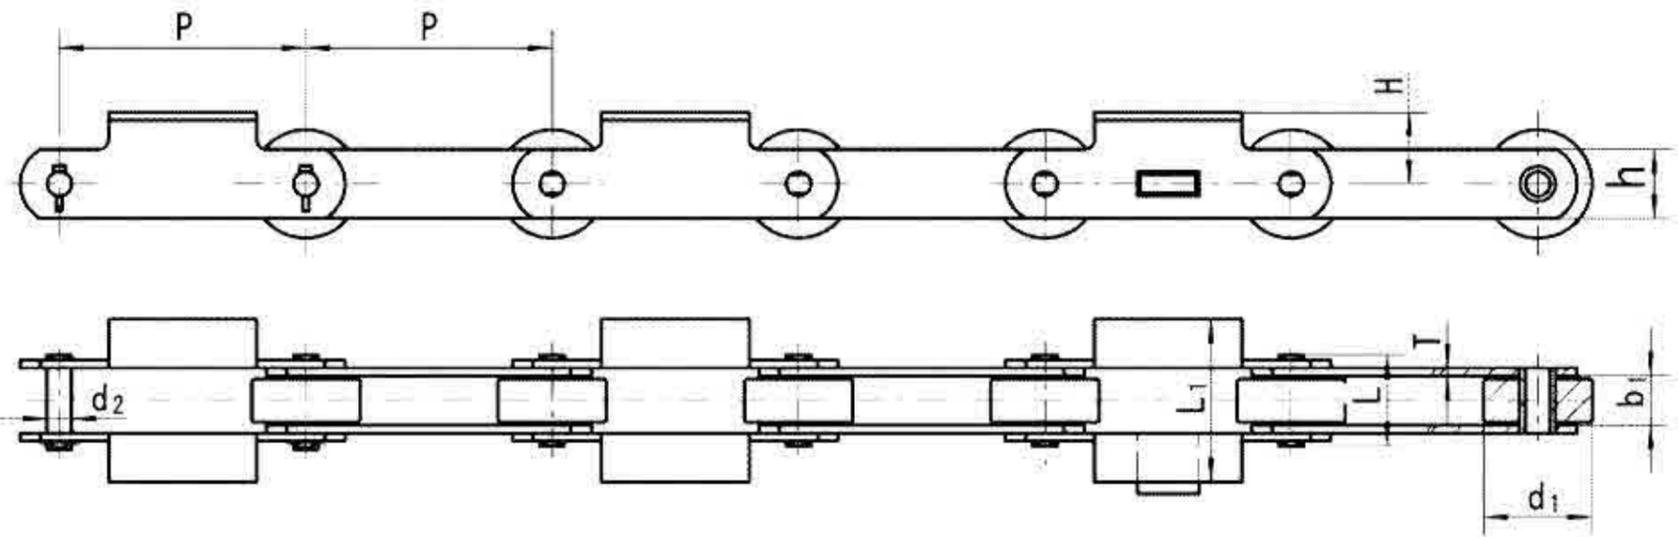


链号 Chain No.	节距 Pitch P(mm)	内节内宽 Inner width of inner link b _i (mm)	滚子直径 Dia. of roller d ₁ (mm)	销轴直径 Dia. of pin d ₂ (mm)	销轴长度 Length of pin L(mm)	链板厚度 Thickness of sidebar T(mm)	链板高度 Height of sidebar h(mm)	翼板宽度 Width of att.sidebar H(mm)	抗拉强度 Tensile strength Q(kN)
YB250	250	50	110	25	90	8	70	165	300

钢锭提升链
Lift Chain for Steel Ingot

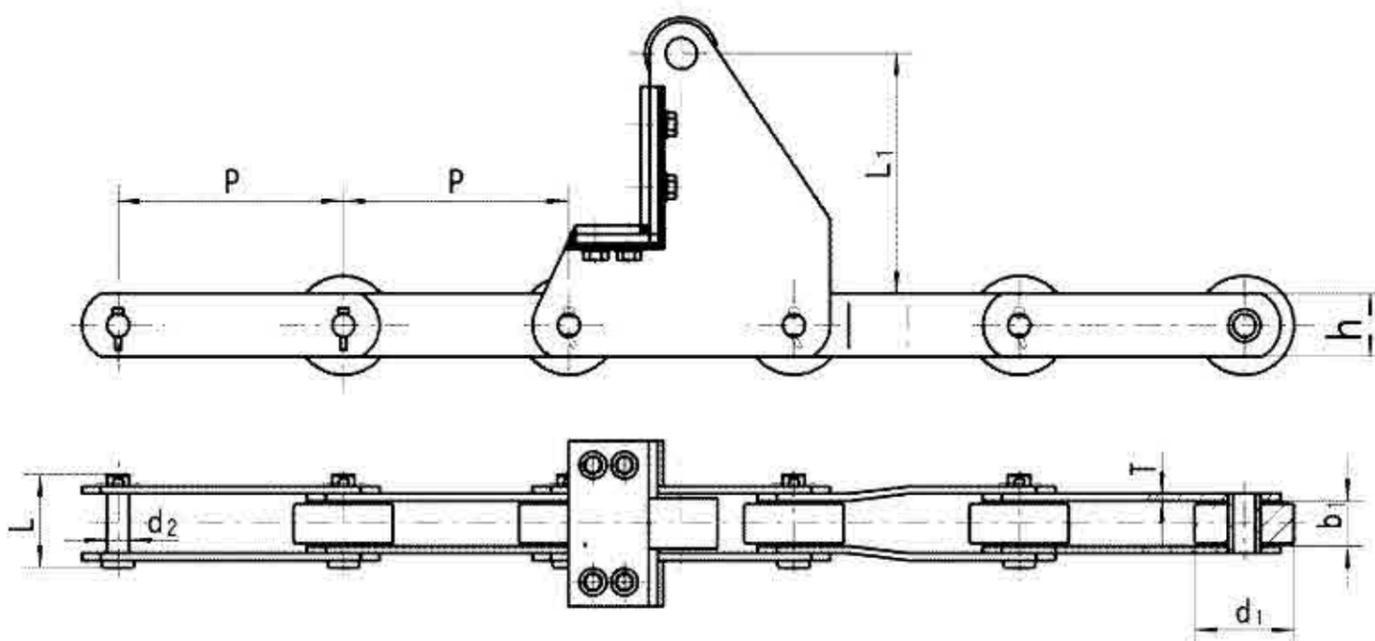


链号 Chain No.	节距 Pitch P(mm)	内节内宽 Inner width of inner link b _i (mm)	滚子直径 Dia. of roller d ₁ (mm)	销轴直径 Dia. of pin d ₂ (mm)	销轴长度 Length of pin L(mm)	链板厚度 Thickness of sidebar T(mm)	链板高度 Height of sidebar h(mm)	翼板宽度 Width of att.sidebar H(mm)	抗拉强度 Tensile strength Q(kN)
TS250	250	57	120	30	128	12	85	302	450

冷床链
Cold Bed Chains

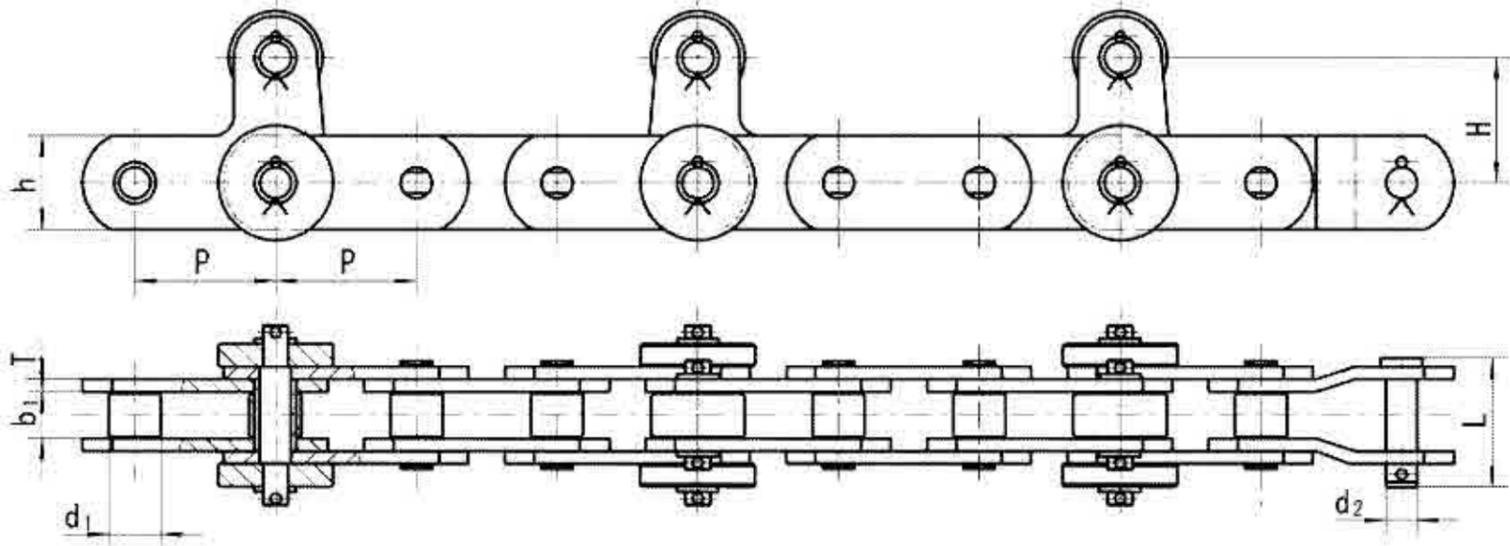


节距 Pitch P(mm)	内节内宽 Inner width of inner link b ₁ (mm)	滚子直径 Dia. of roller d ₁ (mm)	销轴直径 Dia. of pin d ₂ (mm)	销轴长度 Length of pin L(mm)	链板厚度 Thickness of sidebar T(mm)	链板高度 Height of sidebar h(mm)	顶置轮高度 Height of top roller H(mm)	抗拉强度 Tensile strength Q(kN)
135	45	50	30	103.5	12	90	120	500

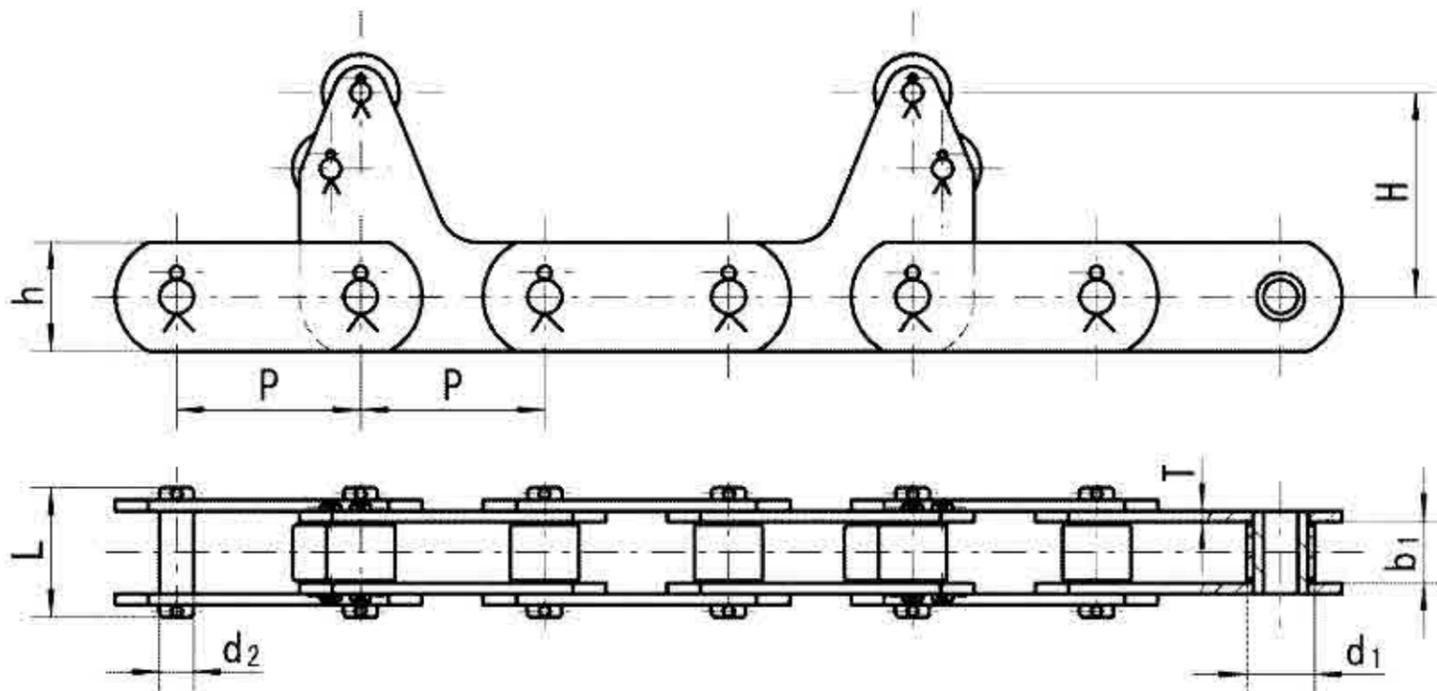


节距 Pitch P(mm)	内节内宽 Inner width of inner link b ₁ (mm)	滚子直径 Dia. of roller d ₁ (mm)	销轴直径 Dia. of pin d ₂ (mm)	销轴长度 Length of pin L(mm)	链板厚度 Thickness of sidebar T(mm)	链板高度 Height of sidebar h(mm)	顶置轮高度 Height of top roller H(mm)	抗拉强度 Tensile strength Q(kN)
135	45	50	25	100	8	80	150	320

冷床链
Cold Bed Chains

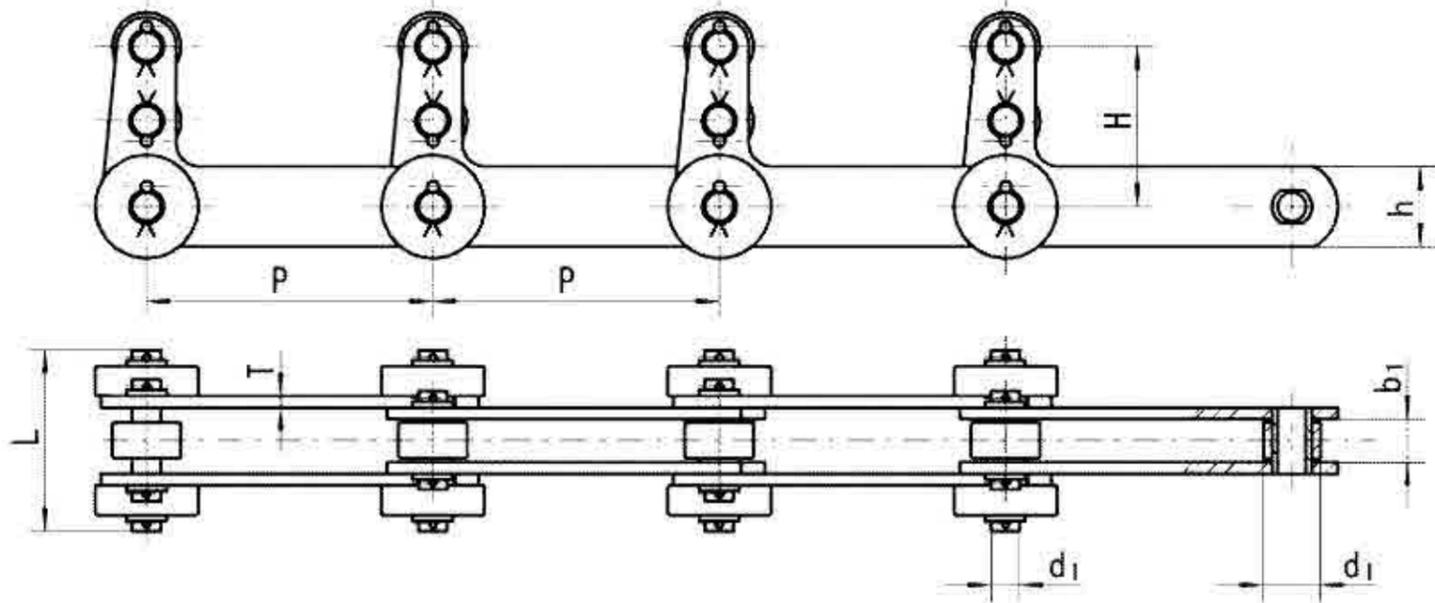


节距 Pitch P(mm)	内节内宽 Inner width of inner link b ₁ (mm)	滚子直径 Dia. of roller d ₁ (mm)	销轴直径 Dia. of pin d ₂ (mm)	销轴长度 Length of pin L(mm)	链板厚度 Thickness of sidebar T(mm)	链板高度 Height of sidebar h(mm)	顶置轮高度 Height of top roller H(mm)	抗拉强度 Tensile strength Q(kN)
250	38	50	25	160	10	70	140	320

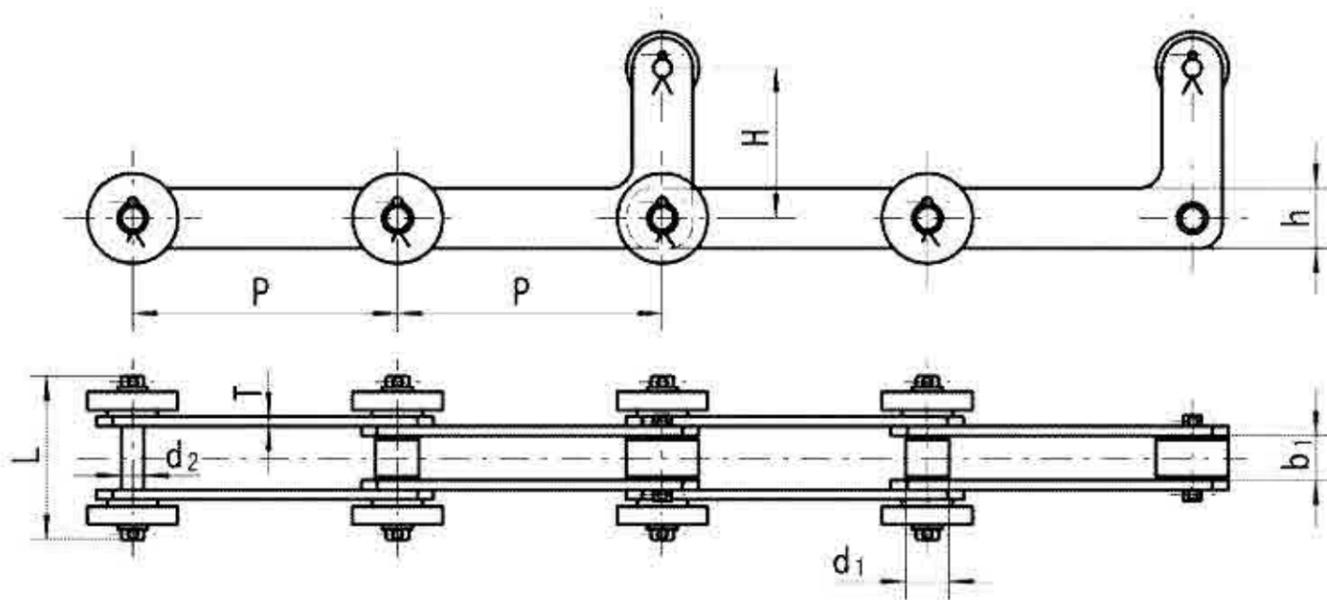


节距 Pitch P(mm)	内节内宽 Inner width of inner link b ₁ (mm)	滚子直径 Dia. of roller d ₁ (mm)	销轴直径 Dia. of pin d ₂ (mm)	销轴长度 Length of pin L(mm)	链板厚度 Thickness of sidebar T(mm)	链板高度 Height of sidebar h(mm)	顶置轮高度 Height of top roller H(mm)	抗拉强度 Tensile strength Q(kN)
220	37	36	19.05	146	8	50	125	200

冷床链
Cold Bed Chains

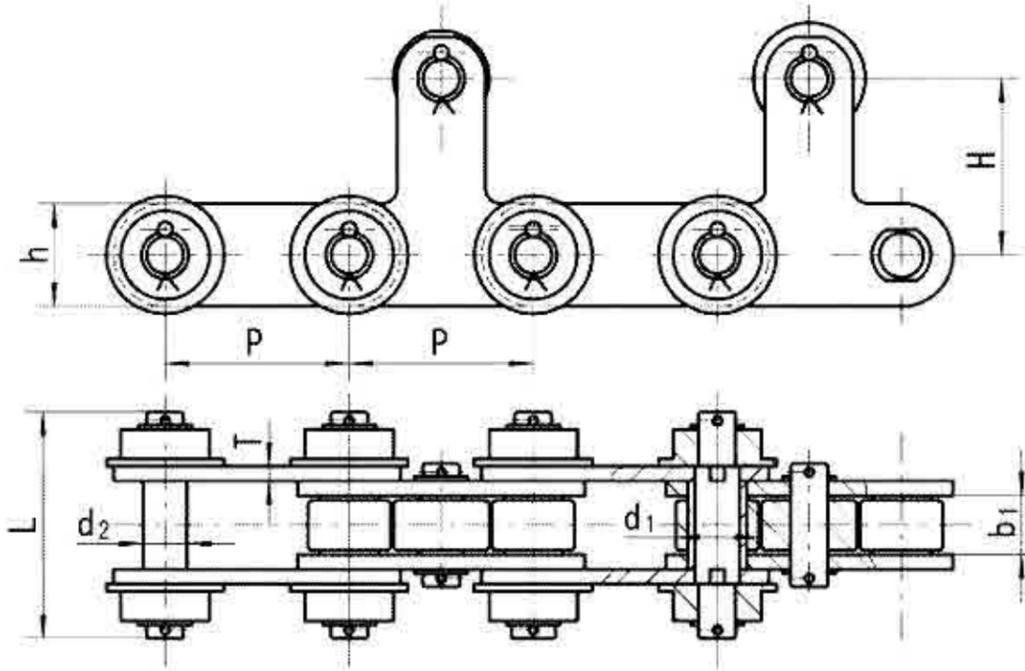


节距 Pitch P(mm)	内节内宽 Inner width of inner link b _i (mm)	滚子直径 Dia. of roller d _i (mm)	销轴直径 Dia. of pin d ₂ (mm)	销轴长度 Length of pin L(mm)	链板厚度 Thickness of sidebar T(mm)	链板高度 Height of sidebar h(mm)	顶置轮高度 Height of top roller H(mm)	抗拉强度 Tensile strength Q(kN)
125	40	56	30	176	10	70	120	315

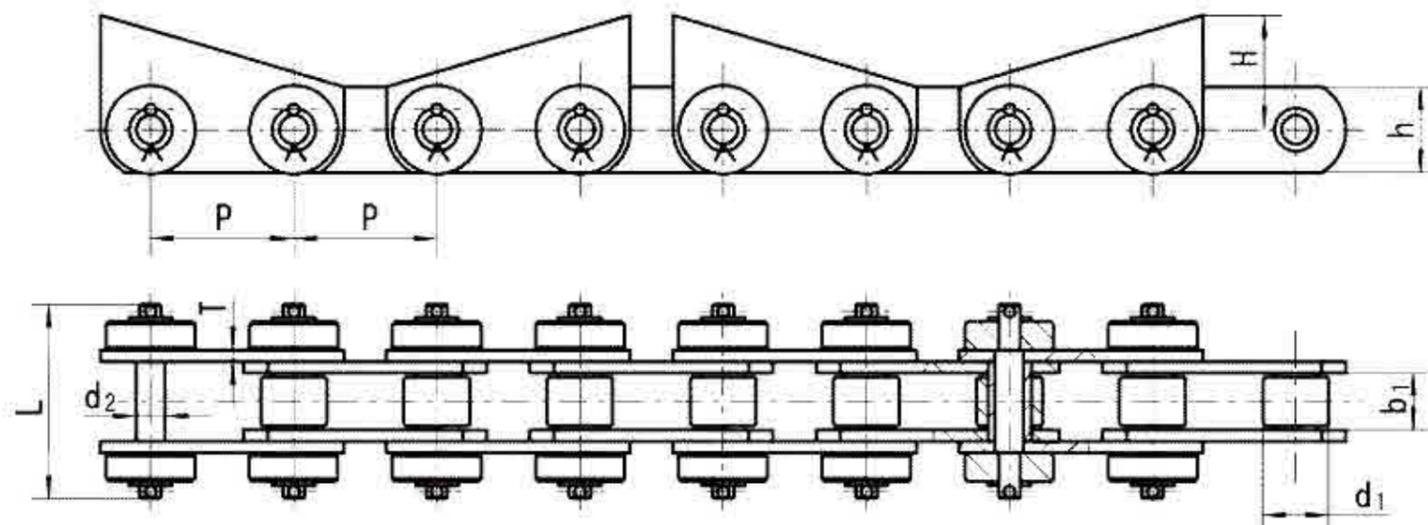


节距 Pitch P(mm)	内节内宽 Inner width of inner link b _i (mm)	滚子直径 Dia. of roller d _i (mm)	销轴直径 Dia. of pin d ₂ (mm)	销轴长度 Length of pin L(mm)	链板厚度 Thickness of sidebar T(mm)	链板高度 Height of sidebar h(mm)	顶置轮高度 Height of top roller H(mm)	抗拉强度 Tensile strength Q(kN)
100	40	46	20	148	8	60	80	175

冷床链
Cold Bed Chains

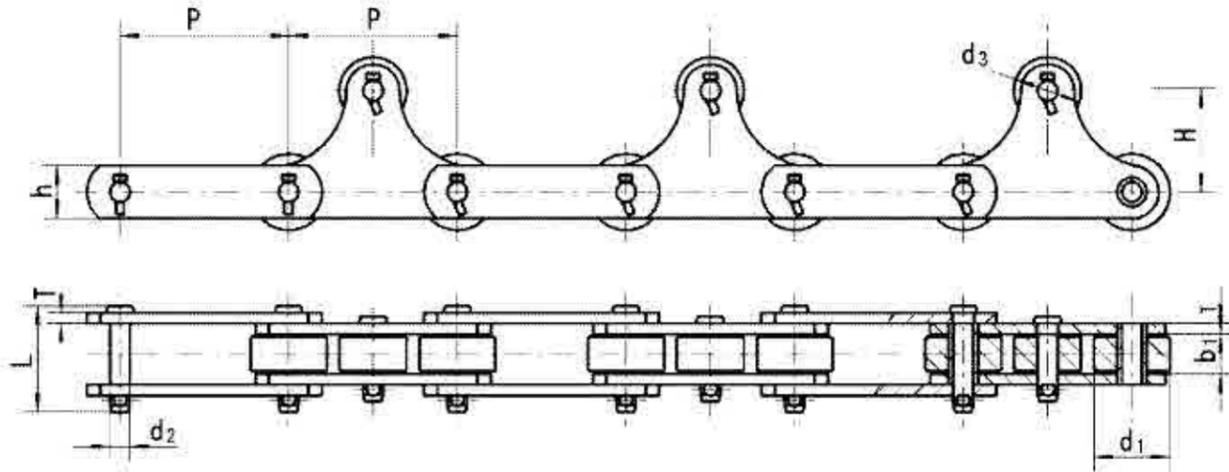

节距 Pitch P(mm)	内节内宽 Inner width of inner link b ₁ (mm)	滚子直径 Dia. of roller d ₁ (mm)	销轴直径 Dia. of pin d ₂ (mm)	销轴长度 Length of pin L(mm)	链板厚度 Thickness of sidebar T(mm)	链板高度 Height of sidebar h(mm)	顶置轮参数 Parameters of top roller		抗拉强度 Tensile strength Q(kN)
							H(mm)	d ₃ (mm)	
127	30.2	57.2	15	79	8	40	76.2	50.8	170


穿孔机链
Chain for Puncher

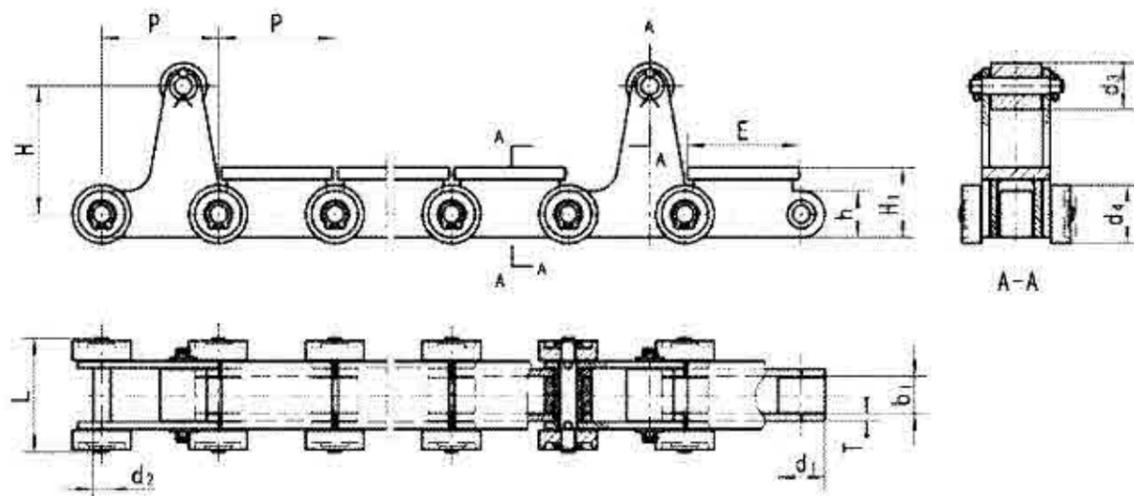


节距 Pitch P(mm)	内节内宽 Inner width of inner link b ₁ (mm)	滚子直径 Dia. of roller d ₁ (mm)	销轴直径 Dia. of pin d ₂ (mm)	销轴长度 Length of pin L(mm)	链板参数 Parameters of sidebar		侧滚直径 Dia. of roller d ₃ (mm)	顶置轮参数 Parameters of top roller		抗拉强度 Tensile strength Q(kN)
					T(mm)	h(mm)		H(mm)	d ₃ (mm)	
100	32	40	15	98	6	40	50	110	40	90

链式轧辊输送链

Chain-style Roll Conveyor Chains

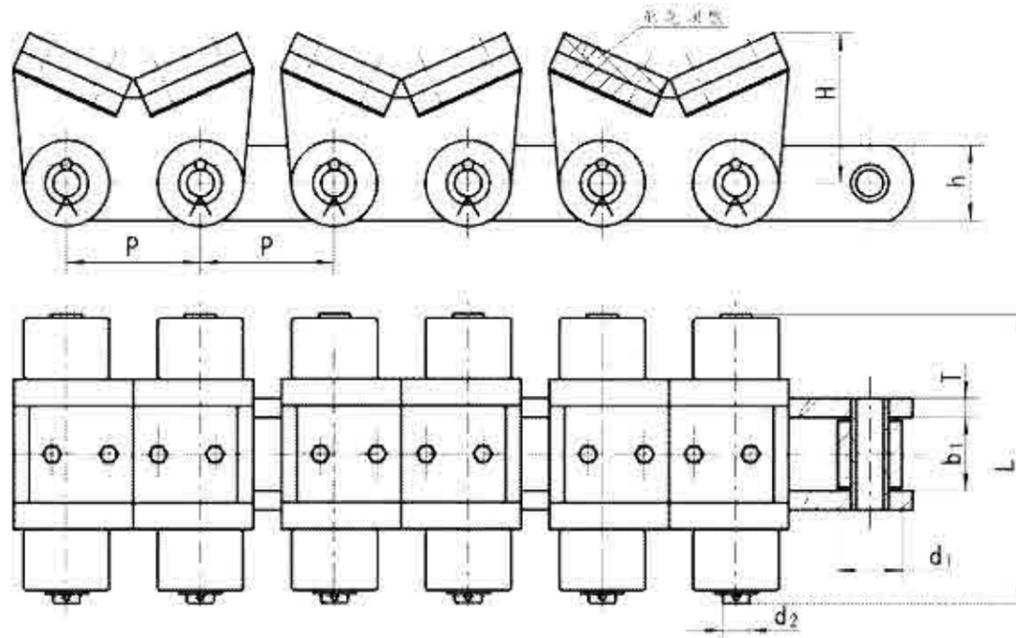


节距 Pitch P(mm)	内节内宽 Inner width of inner link b ₁ (mm)	滚子直径 Dia. of roller d ₁ (mm)	销轴直径 Dia. of pin d ₂ (mm)	销轴长度 Length of pin L(mm)	链板厚度 Thickness of sidebar T(mm)	链板高度 Height of sidebar h(mm)	顶板高度 Height of top plate H(mm)	抗拉强度 Tensile strength Q(kN)
125	68.5	60	25	262	18	70	141.3	320

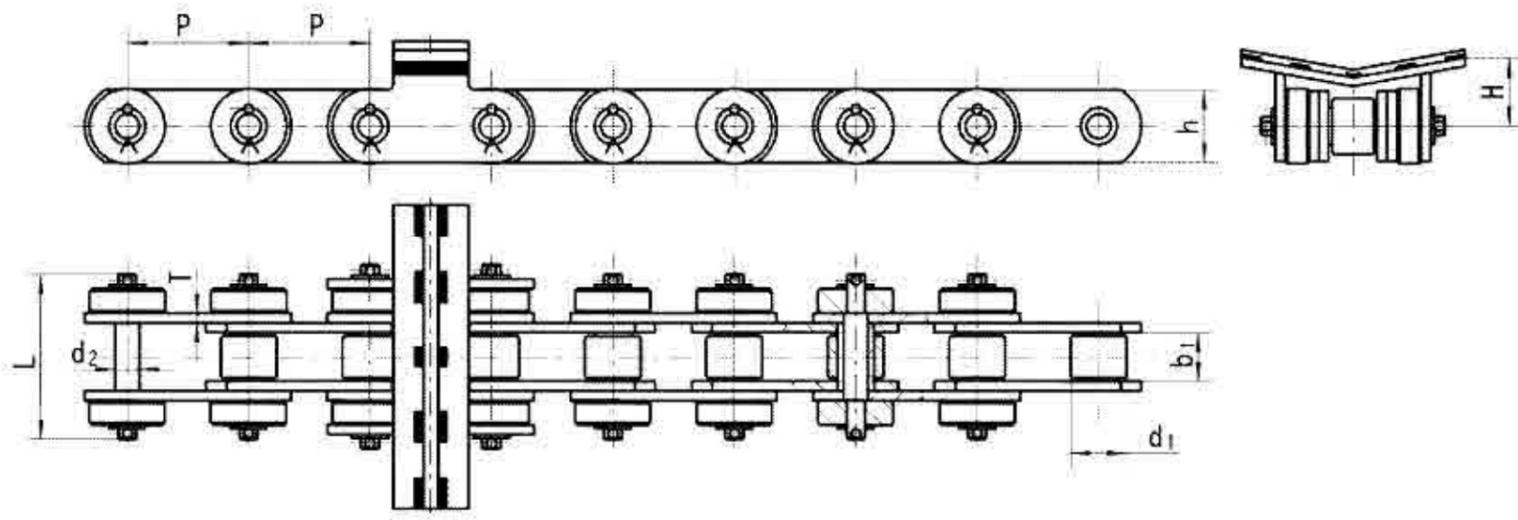


节距 Pitch P(mm)	内节内宽 Inner width of inner link b ₁ (mm)	滚子直径 Dia. of roller d ₁ (mm)	销轴直径 Dia. of pin d ₂ (mm)	销轴长度 Length of pin L(mm)	链板厚度 Thickness of sidebar T(mm)	链板高度 Height of sidebar h(mm)	顶板高度 Height of top plate H(mm)	抗拉强度 Tensile strength Q(kN)
100	40	46	20	165	8	60	98	175

晾干链
Air Drying Chains

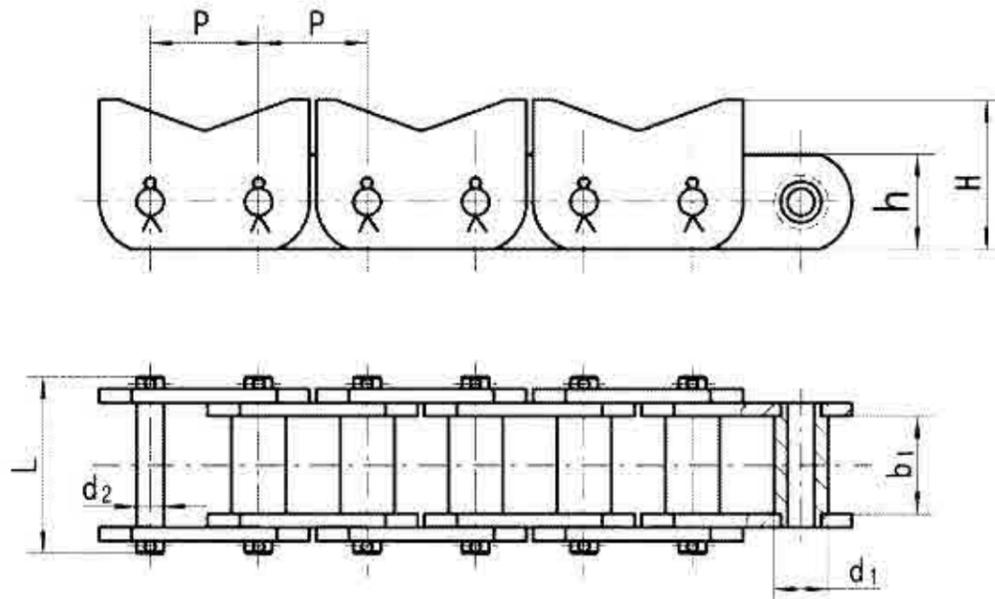


节距 Pitch P(mm)	内节内宽 Inner width of inner link b _i (mm)	滚子直径 Dia. of roller d _i (mm)	销轴直径 Dia. of pin d ₁ (mm)	销轴长度 Length of pin L(mm)	链板厚度 Thickness of sidebar T(mm)	链板高度 Height of sidebar h(mm)	翼板高度 Height of wing sidebar H(mm)	抗拉强度 Tensile strength Q(kN)
80	72	40	20	131	10	70	110	360

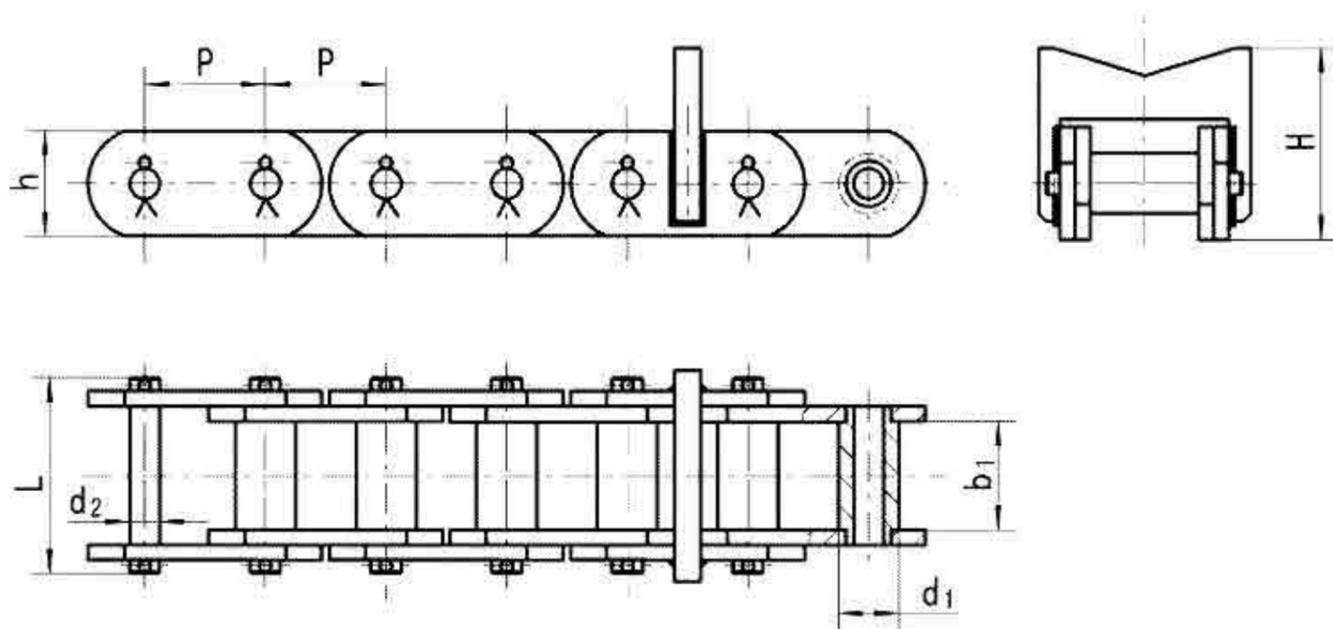


节距 Pitch P(mm)	内节内宽 Inner width of inner link b _i (mm)	滚子直径 Dia. of roller d _i (mm)	销轴直径 Dia. of pin d ₁ (mm)	销轴长度 Length of pin L(mm)	链板厚度 Thickness of sidebar T(mm)	链板高度 Height of sidebar h(mm)	翼板高度 Height of wing sidebar H(mm)	抗拉强度 Tensile strength Q(kN)
80	72	40	20	131	10	70	110	360

喷漆链
Painted Chains

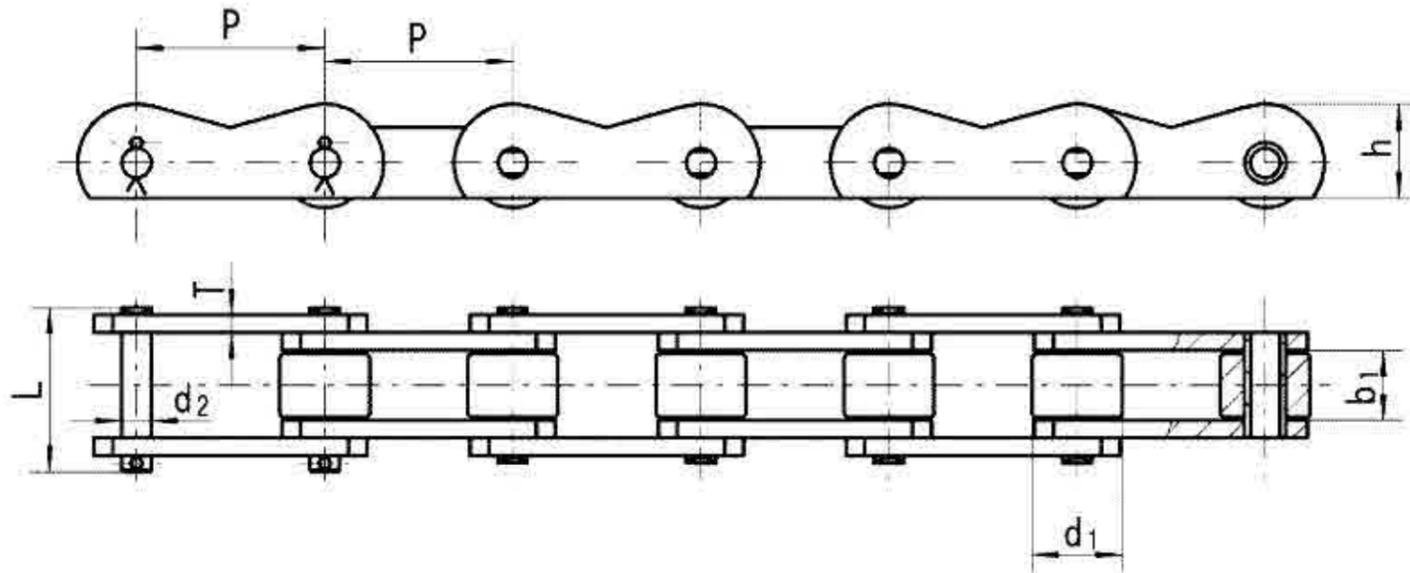


节距 Pitch P(mm)	内节内宽 Inner width of inner link b,(mm)	滚子直径 Dia.of roller d,(mm)	销轴直径 Dia. of pin d ₂ (mm)	销轴长度 Length of pin L(mm)	链板厚度 Thickness of sidebar T(mm)	链板高度 Height of sidebar h(mm)	抗拉强度 Tensile strength Q(kN)
101.6	38	48.5	15.88	88.7	9.5	50.8	220

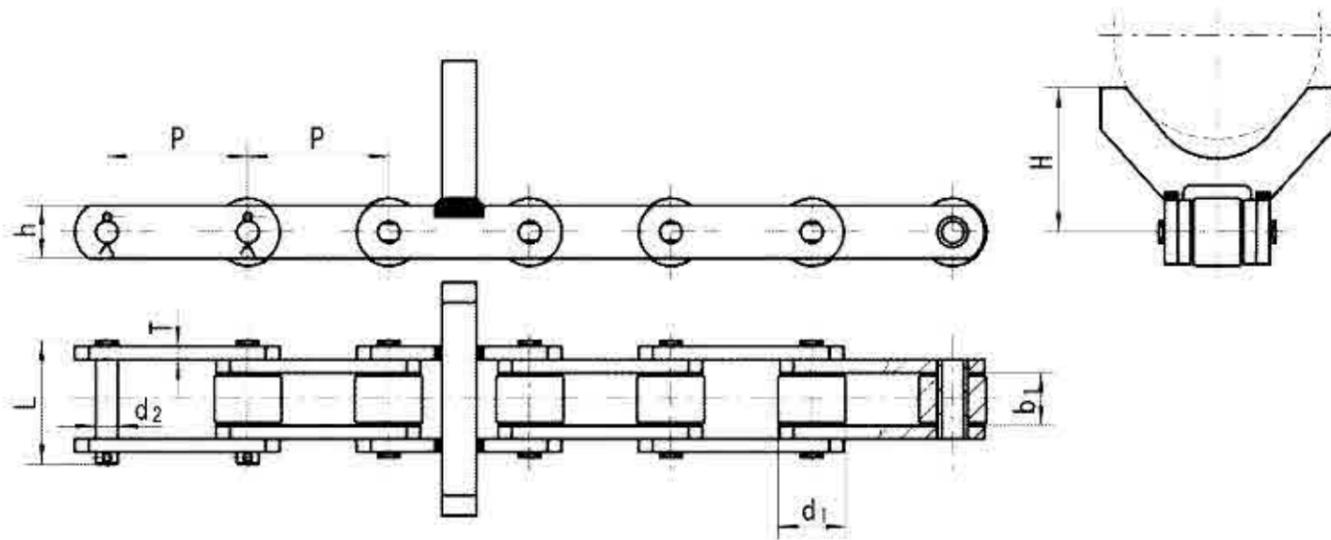


节距 Pitch P(mm)	内节内宽 Inner width of inner link b,(mm)	滚子直径 Dia.of roller d,(mm)	销轴直径 Dia. of pin d ₂ (mm)	销轴长度 Length of pin L(mm)	链板厚度 Thickness of sidebar T(mm)	链板高度 Height of sidebar h(mm)	翼板高度 Heigth of wing sidebar H(mm)	抗拉强度 Tensile strength Q(kN)
101.6	38	48.5	15.88	88.7	9.5	38.1	104	220

冶炼轧制驮载链

Loading Chains for Metallurgical

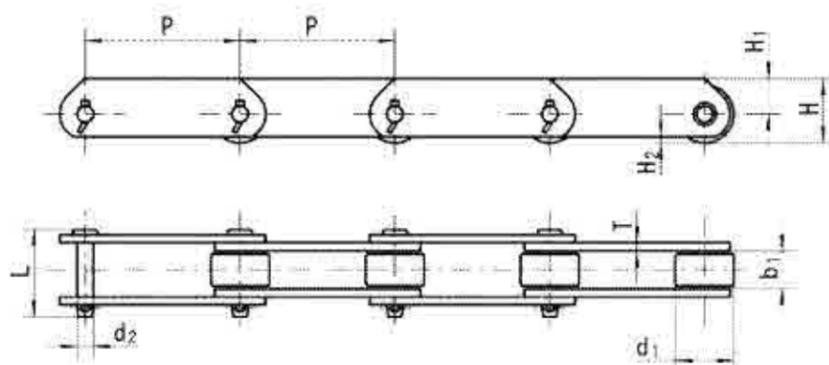

HA型附件
HA ATTACHMENT

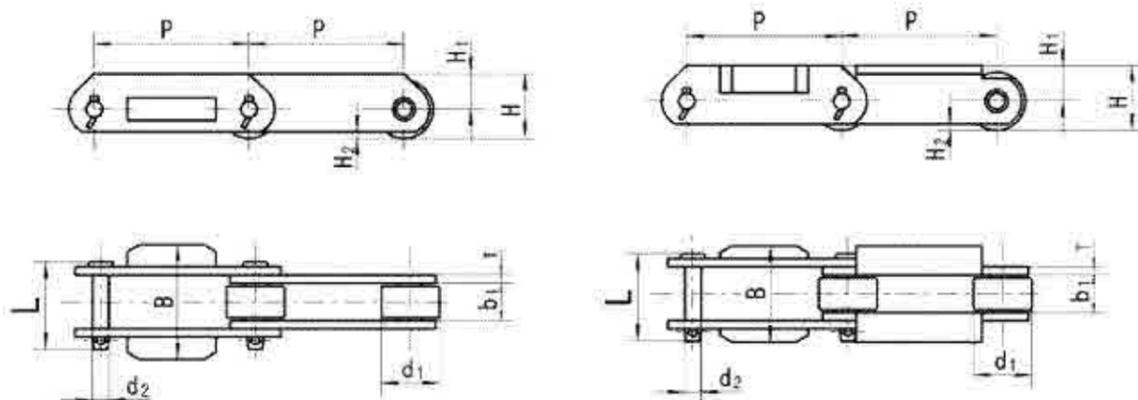


HB型附件
HA ATTACHMENT

HC型附件
HA ATTACHMENT


链号 Chain No.	滚子形式 Roller type	节距 Pitch P (mm)	内节内宽 Width between inner plates b (min) (mm)	滚子 外径 Roller diameter d _r (max) (mm)	链条高度 Height of chain H (mm)	链板参数 Data of sidebar				销轴参数 Data of pin			最小抗拉 强度 Ultimate tensile strength Q ₀ kN
						H1 (mm)	H2 (mm)	T (mm)	B (mm)	L1 (mm)	L2 (mm)	d _p (mm)	
W03075	R	75	16.1	31.8	36.9	21	4.9	3.2	50	18	20	7.92	30
W03100	R	100	16.1	31.8	36.9	21	4.9	3.2	50	18	20	7.92	30
W07100	R	100	22	40	44	24	4	4.5	68	24.5	29	11.10	70
W07150	R	150	22	40	44	24	4	4.5	68	24.5	29	11.10	70
W08150	R	150	27	44.5	50.3	28	8	6.3	80	31	35	11.10	80
W11150	R	150	30	50.8	57.4	32	6.4	6.3	90	33.5	40	14.27	115
W11100	R	100	30	50.8	57.4	32	6.4	6.3	90	33.5	40	14.27	115
W19152	R	152.4	37.1	57.2	63.5	35	6	8	105	41.5	47.5	15.9	190
W19200	R	200	37.1	65	73.5	41	10	8	105	41.5	47.5	15.9	190
W19250	R	250	37.1	65	73.5	41	10	8	105	41.5	47.5	15.9	190
W25250	R	250	51.4	80	90	50	13.8	10	122	52	54.5	19.1	250
W25300	R	300	51.4	80	90	50	13.8	10	122	52	54.5	19.1	250
W28200	R	200	49	85	95.5	53	10.5	10	145	52	61	22.2	285
W28300	R	300	57.2	85	95.5	53	10.5	10	145	56	65	22.2	285
W48250	R	250	66.7	110	112	62	12	12.7	170	68	77	25.4	485
W48300	R	300	66.7	100	112	62	12	12.7	170	68	77	25.4	485
W48400	R	400	66.7	100	112	62	12	12.7	170	68	77	25.4	485
W51450	R	450	77	110	125	70	17	16	200	82.5	93	31.8	510

冶炼轧制驮载链

Loading Chains for Metallurgical

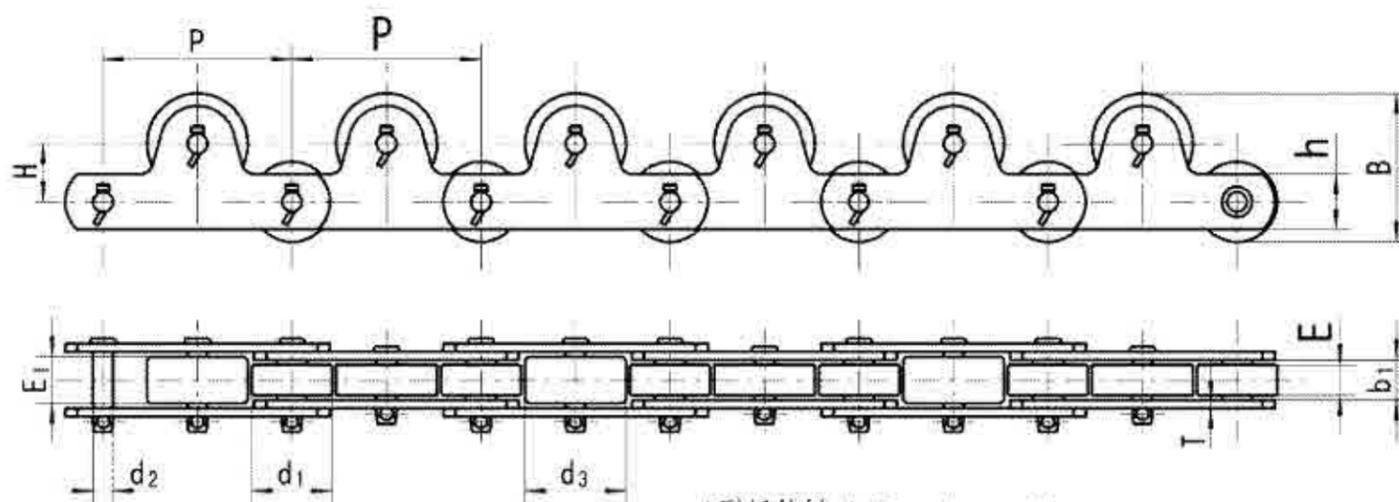

A型托轮链 A Type top roller

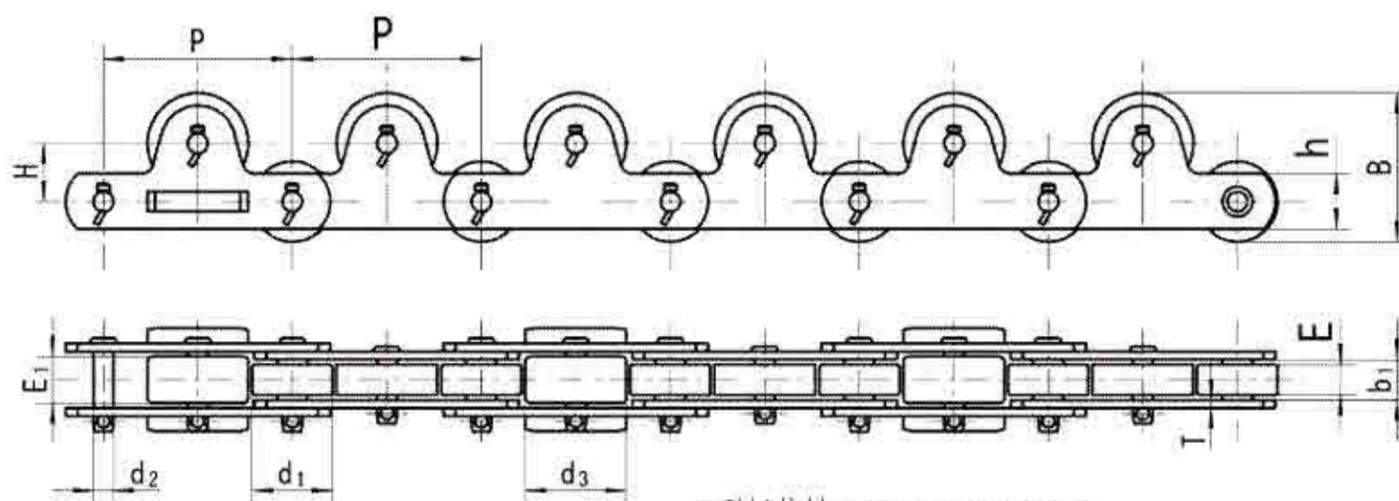


B型托轮链 A Type top roller

37


链号 Chain No.	节距 Pitch P (mm)	滚子 Roller		链板 Sidebar		销轴 Pin		托轮 Top roller			托轮允许载荷 Allowable working load of top roller		抗拉强度 Tensile strength	A型概重 A type weight (kg/m)	B型概重 B type weight (kg/m)
		直径 d ₁ (mm)	触轨幅 Face width E (mm)	高度 Height h (mm)	厚度 Thick T (MM)	直径 d ₂ (mm)	长度 L (mm)	高度 H (mm)	直径 Dia. d ₃ (mm)	触轨幅 Face width E ₁ (mm)	不热处理 No heat reated	热处理 Heat reated			
WTR 03075	75	31.8	14	16.1	22	3.2	7.92	23.1	38	40	20/14	35	60	4.1	4.3
WTR 03100	100	31.8	14	16.1	22	3.2	7.92	23.1	38	40	20/14	35	60	3.3	3.5
WTR 07100	100	40	19	22	32	4.5	11.1	30	53.5	40	28/19	65	105	6.4	6.8
WTR 07150	150	40	19	22	32	4.5	11.1	30	53.5	40	28/19	65	105	5.0	5.4
WTR 08150	150	44.5	23	27	28.6	6.3	11.1	30	65.5	40	35/23	80	130	6.3	6.8
WTR 11150	150	50.8	26	30	38.1	6.3	14.27	30	69	50.8	38/26	115	195	9.9	10.5
WTR 19150	152.4	57.2	32	37.1	44.5	8	15.9	37.8	83.5	57.2	48/32	150	255	15.5	16.2
WTR 19200	200	65	32	37.1	44.5	8	15.9	45	83.5	65	48/32	150	255	14.6	15.4
WTR 25200	200	80	44	51.4	50.8	10	19.1	65	109.5	80	64/44	250	420	26.0	27.0

大节距重型驮载链

Large-pitch Heavy Duty Loading Chains

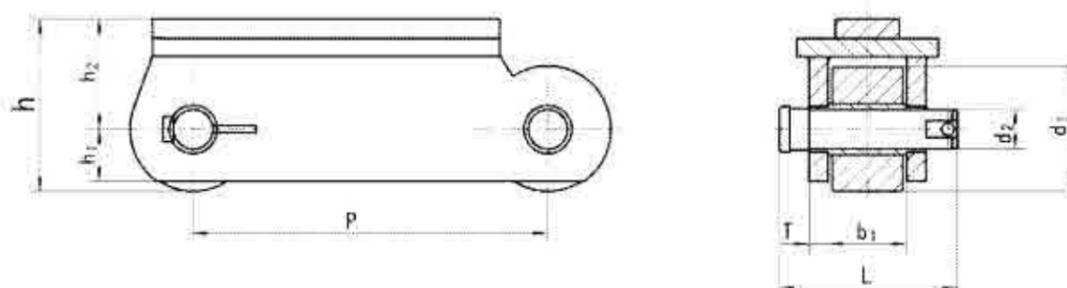


链号 Chain No.	节距 Pitch P (mm)	内节内宽 Inner width of inner link b,(mm)	滚子直径 Dia.of roller d,(mm)	销轴直径 Dia. of pin d ₂ (mm)	销轴长度 Length of pin L(mm)	链板参数 dimensions				抗拉强度 Tensile strength Q(kN)
						h (mm)	h ₁ (mm)	h ₂ (mm)	T (mm)	
M-A1	700	155	245	78	355	340	103	217.5	38	5400

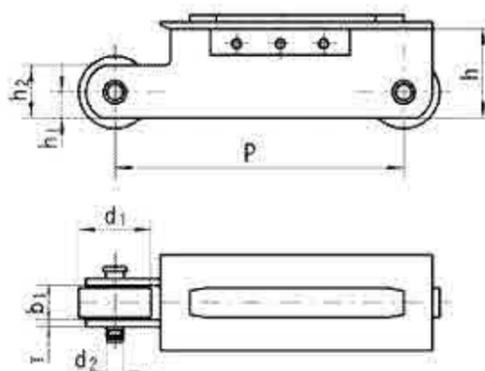


链号 Chain No.	节距 Pitch P (mm)	内节内宽 Inner width of inner link b,(mm)	滚子直径 Dia.of roller d,(mm)	销轴直径 Dia. Of pin d ₂ (mm)	链板参数 dimensions				抗拉强度 Tensile strength Q(kN)
					h (mm)	h ₁ (mm)	h ₂ (mm)	T (mm)	
JL60300	300	60	125	28	154.5	45	92	12	588
JL60400	400	60	125	28	154.5	45	92	12	588
JL60500	500	60	125	28	154.5	45	92	12	588
JL90300	300	62	135	30	177.5	56	110	16	882
JL90400	400	62	135	30	177.5	56	110	16	882
JL90500	500	62	135	30	177.5	56	110	16	882
JL90300W	300	78	135	30	177.5	56	110	16	882
JL90400W	400	78	135	30	177.5	56	110	16	882
JL90500W	500	78	135	30	177.5	56	110	16	882
JL130300	300	76	150	38.5	188	63	113	16	1274
JL130400	400	76	150	38.5	188	63	113	16	1274
JL130500	500	76	150	38.5	188	63	113	16	1274
JL130600	600	76	150	38.5	188	63	113	16	1274
JL160400	400	85	175	41.5	221.5	75	134	19	1569
JL160500	500	85	175	41.5	221.5	75	134	19	1569
JL160600	600	85	175	41.5	221.5	75	134	19	1569

弯附板式提升机链
Attachment Sidebar Elevator Chains

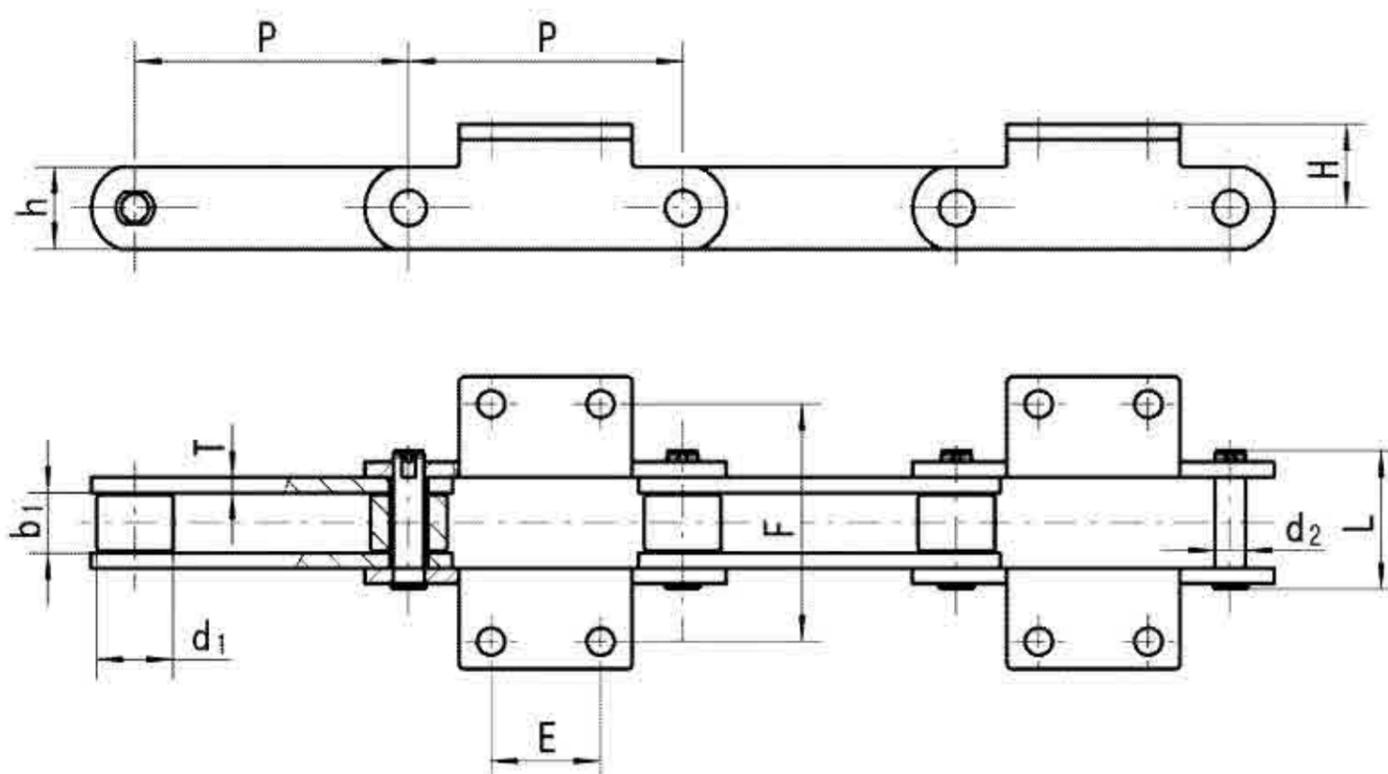


链号 Chain No.	节距 Pitch P (mm)	内节内宽 Inner width of inner link b.(mm)	滚子直径 Dia. of roller d ₁ (mm)	链板高度 Height of sidebar h	链板厚度 Thickness of sidebar T(mm)	销轴长度 Length of pin L(mm)	销轴直径 Dia. of pin d ₂ (mm)	附件尺寸 Dimensions of attachment			抗拉强度 Tensile strength Q(kN)
								L (mm)	F (mm)	H (mm)	
DT-10	100	20.5	44	26	4	42	9.54	40	69	25	82
DT-15A	101.6	15.7	38.1	26	4	37.1	9.54	40	63.5	22.3	82
DT-15B	101.6	31	44.45	38	7.9	75.5	15.88	40	110	35	140
DT-50	160	33.7	38	50	8	82.5	15.88	60	130	50	240
DT-35	160	36	37.5	40	6	73	15.88	60	130	35	180
DT-30D	152.4	37	38.1	45	8	86.6	16	60	120	37.5	224
DT-30A	152.4	40	38.1	45	8	89.6	16	60	120	37.5	224
DT-150	200	57.6	48.5	75	10	126	22.2	80	160	40	400
DT-200	250	67.4	63.5	90	12	146	31.25	120	200	75	580

斗式提升机链
Bucket Elevator Chains

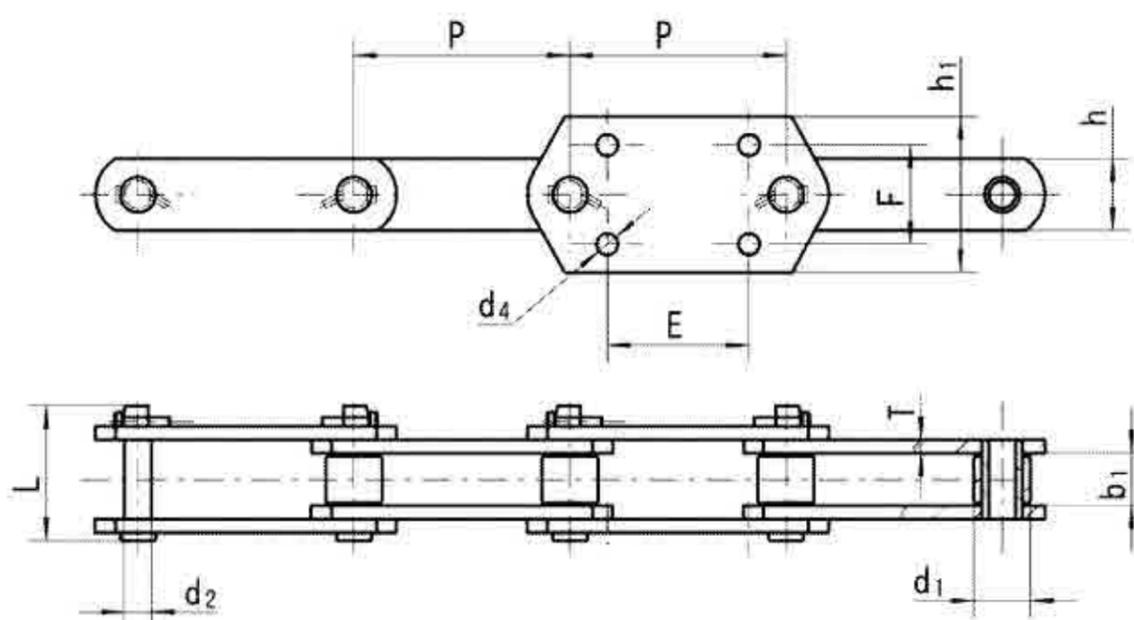


链号 Chain No.	节距 Pitch P (mm)	内节内宽 Inner width of inner link b ₁ (mm)	滚子直径 Dia. of roller d ₄ (mm)	链板高度 Height of sidebar h	链板厚度 Thickness of sidebar T(mm)	销轴长度 Length of pin L(mm)	销轴直径 Dia. of pin d ₁ (mm)	附板高度 Height of sidebar h ₁ (mm)	抗拉强度 Tensile strength Q(kN)
NE15-101.6	101.6	27	26.5	35	6	70	11.5	35	128.1
NE30-152.4	152.4	36.5	35	50	8	90	15.5	50	245
NE50-152.4	152.4	36.5	35	50	8	90	15.5	110	245
NE100-200	200	51.8	42	60	10	120	19.1	125	375
NE150-200	200	57.8	48.5	60	10	120	22.23	125	375
NE300-250	250	75	70	100	16	165	35	150	450
NE300-250A	250	67.4	63.5	90	12	146	31.75	150	450
NP152.4	152.4	38	35.7	45	7.9	88	15.88	105	245
FE12600	152.4	36.5	35	45	7.9	86	15.88	120	245
NE100/2L	200	53	44.5	60	10	114	19.05	125	400
NE150-B/2L	200	53	44.5	60	10	114	19.05	125	400
NE200/2L	250	67.4	63.5	90	12	140	31.75	150	750
9060 G4/4L	152.4	38.1	34.93	50.8	9.5	94.5	19.05	120	312
P152.4-A/2L	152.4	36.5	36	50	8	85	17.33	105	160
DK19200MG4/2L	200	36.5	38.1	45	8	86	15.77	125	312
NE150-A/2L	200	57.6	48.5	75	10	122	22.23	125	529
P152.4 3L	152.4	54	31.75	38.1	9.6	109	15.77	139.7	145
P125/2L	125	31	52	50.8	8	80	17	100	219.5
FE12600-S/2L	152.4	36.5	34.93	45	7.9	86	15.88	120	160
NE150/2L	200	57.6	48.5	75	10	118	22.23	125	529
NE300-250/2L	250	75	70	100	16	165	35	150	1107
P152.4/2L	152.4	38	35.7	45	7.9	88	15.88	105	160
DS17200-SG4/2L	200	50.8	40.08	50.8	9.5	106.5	19.05	130	260
P250-G4/2L	250	82	73	115	16	183.5	38.5	180	1200
NE	250	75	70	100	16	165	35	150	1107

斗式提升机链
Bucket Elevator Chains

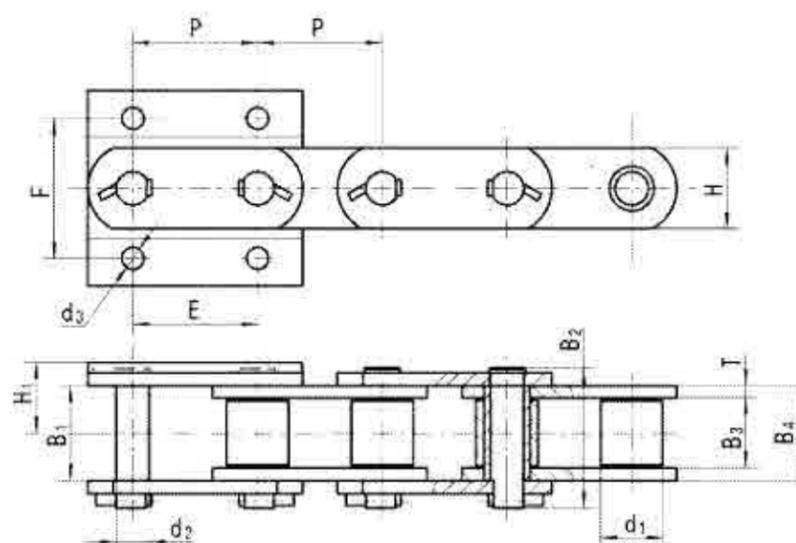


型号 Model	P (mm)	B ₁ (mm)	d ₁ (mm)	H (mm)	H ₁ (mm)	T (mm)	B ₂ (mm)	d ₂ (mm)	E (mm)	F (mm)	d ₃ (mm)	B ₃ (mm)	B ₄ (mm)
P200-2L	200	64.4	42	62	54.85	8	100	21	100	100	16	47	63.8
P150/2L	150	43.6	31.8	38.1	39.8	6.35	69	14.17	75	75	14	30	43.2
P100/4L	100	73	40.1	50	58	10	111	19.05	100	100	16	52	72.5
TBH100/4L	100	79	50.8	72	64	10	120.5	25	100	100	18	57.5	78
C100-K4/4L	100	89	52	72	67.5	10	134	27	100	100	18	66.3	88.3
C125-K4/4L	125	79.8	50.8	70	63.5	10	101	24	125	110	22	57	79
P76.2-K4/4L	76.2	54.5	34.9	44.5	46.25	7.9	70.3	16	75	75	14	37	52.8
P100-K4/4L	100	73	40.1	50	58	10	111	19.05	100	100	16	52	72.5
P125-K4/4L	125	79.8	50.8	70	63.5	10	121	24	125	110	18	57	79
P100-G4-Y1/4L	100	80	50	75	60	10	120	26	100	115	16	55	75.9
P75-G4/4L	75	43	29	38	37.5	6	68	14.17	75	80	15	30	42.5

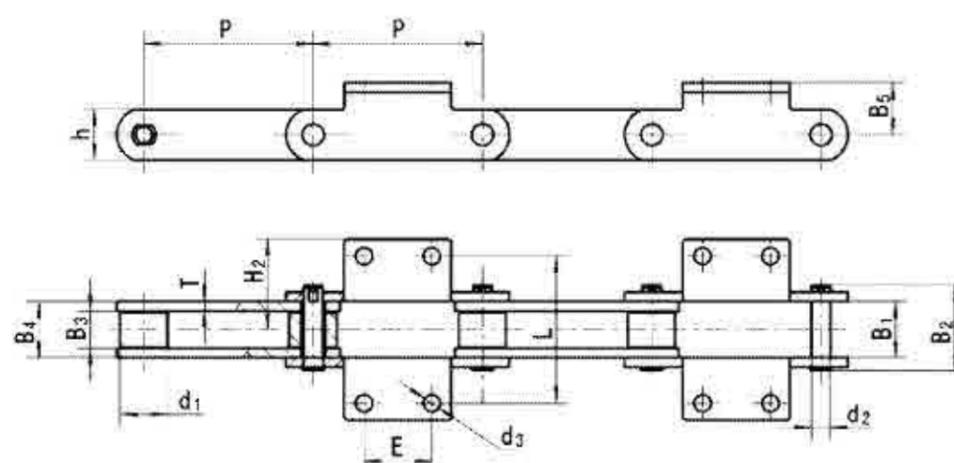

型号 Model	P ₁ (mm)	E (mm)	H ₁ (mm)	H ₂ (mm)	B ₁ (mm)	B ₂ (mm)	B ₃ (mm)	B ₄ (mm)	B ₅ (mm)	d ₁ (mm)	d ₂ (mm)	d ₃ (mm)	T (mm)	L (mm)
P152.4	152.4	60	45	79	61.7	94	44.5	61	38	57.2	15.77	14.8	8	-
DT-30A-A	152.4	60	45	77	57.5	89.5	39.5	56	38	38.1	17.33	13	8	120
DT-30A	152.4	60	45	-	58	89.6	40	56	37.5	38.1	16	13	8	120

斗式提升机链
Bucket Elevator Chains

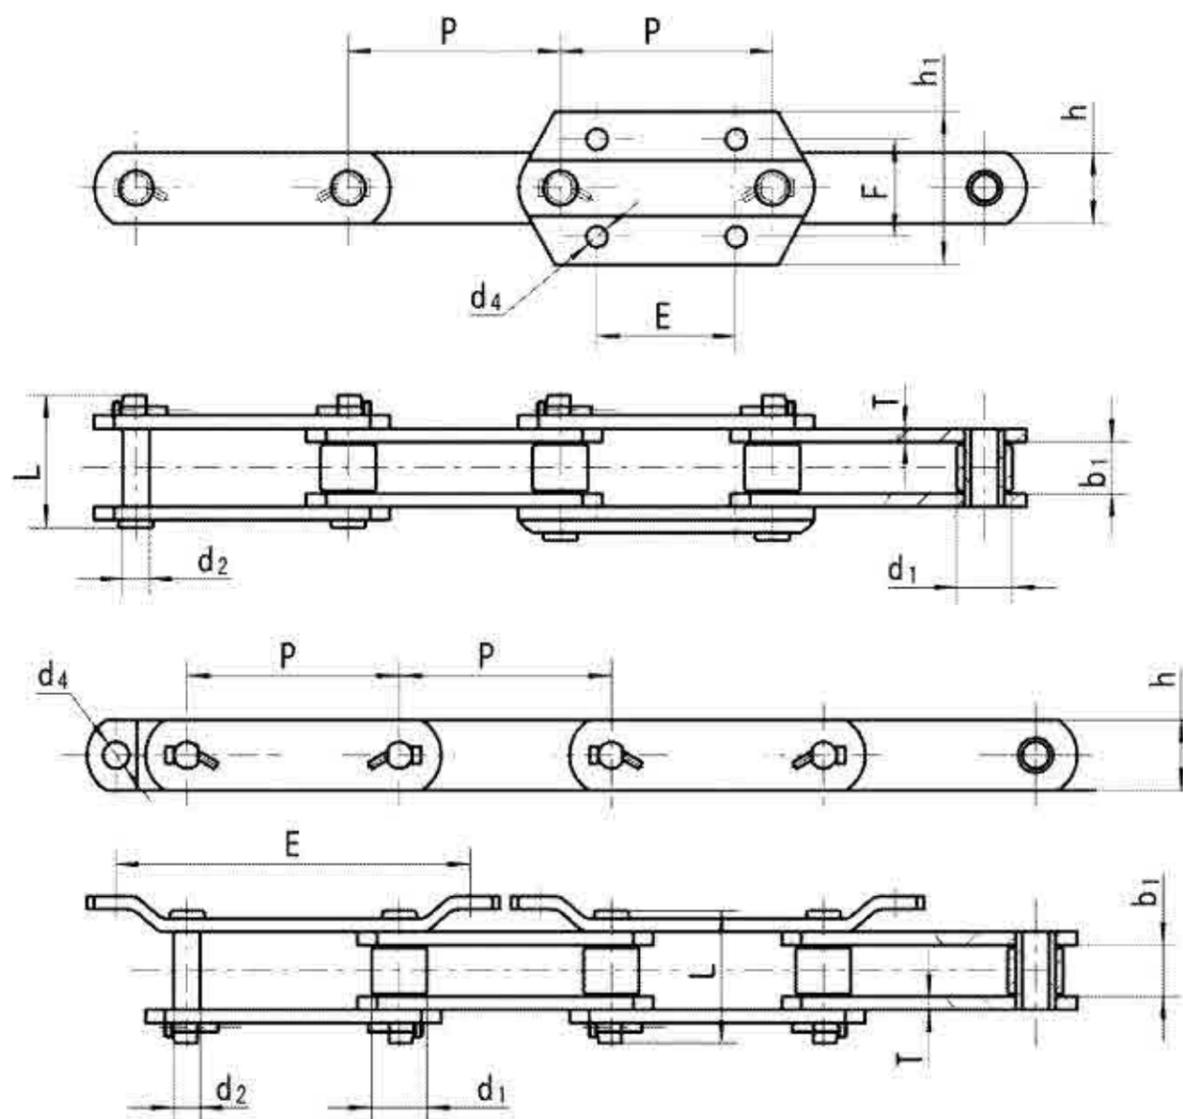


斗式提升机链主要用于矿山、冶金、水泥、筑路行业的斗式提升设备。
The bucket lifter chain is mainly used in bucket lifter used in mine, metallurgy, cement and road making industries.

链号 Chain No.	节距 Pitch P (mm)	内节内宽 Inner width of inner link b.(mm)	滚子直径 Dia.of roller d ₁ (mm)	链板高度 Height of sidebar h (mm)	链板厚度 Thickness of sidebar T (mm)	销轴长度 Length of pin L (mm)	销轴直径 Dia. of pin d ₂ (mm)	附板高度 Height of sidebar h ₁ (mm)	抗拉强度 Tensile strength Q (kN)
NP150	150	30	31.8	38.1	6.35	69	14.17	105	200
NP228.6	228.6	64	62	70	13	136	24.2	70	440

链号 Chain No.	d ₄ (mm)	E(mm)	F(mm)
NP150	14	75	75
NP228.6	17	355.6	-

附板尺寸Dimensions of Attachment


斗式提升机链
Bucket Elevator Chains

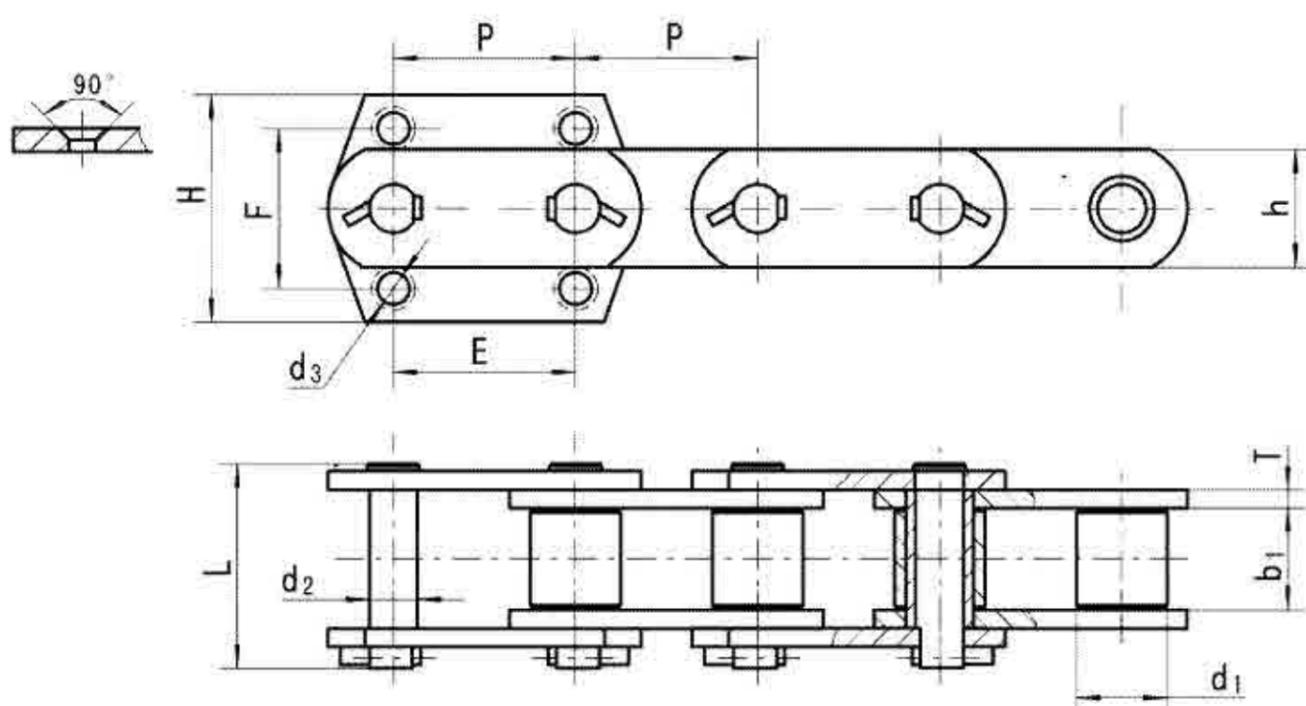

NSE 型 TYPE NSE

链号 Chain No.	节距 Pitch P (mm)	内节内宽 Inner width of inner link b,min (mm)	滚子直径 Dia. of roller d ₃ (mm)	链板高度 Height of sidebar h (mm)	链板厚度 Thickness of sidebar T (mm)	销轴长度 Length of pin L (mm)	销轴直径 Dia. of pin d ₂ (mm)	附件尺寸 Dimension of attachment				抗拉强度 Tensile strength Q(kN)
								H (mm)	d ₃ (mm)	E (mm)	F (mm)	
NSE200	100	51.8	44.5	60	10	111.5	19.10	150	18	100	105	420
NSE300	100	57.6	48.5	75	7.5	120	22.23	150	18	100	105	520
NSE400	125	67.4	63.5	90	12	139.3	31.75	180	18	125	130	735
NSE500-1	125	75	70	100	16	170	35	180	18	125	130	980
NSE500-2	125	75	71.5	102	16	165	36	180	18	125	130	1200
NSE600H	125	75	75	105	16	165	40	185	18	125	136	1260
NSE700	150	85	85	125	16	180	48	226	22	150	165	1470

FU型运机链
FU Style Chains

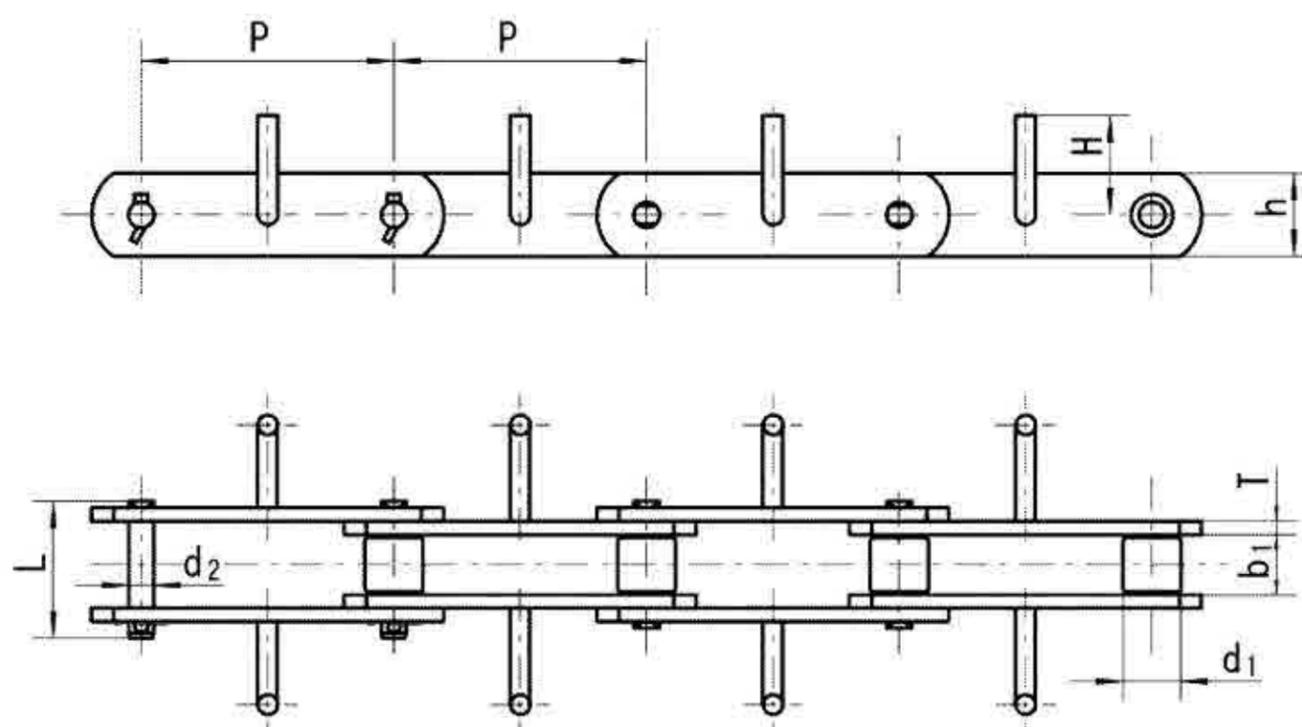


FU型运机链主要用于矿山、冶金、水泥、筑路行业的粉末输送设备。


FU style chain is mainly used in Powder conveyor in mine, metallurgy, cement and road making industries.

链号 Chain No.	节距 Pitch P (mm)	内节内宽 Inner width of inner link b _i (mm)	滚子直径 Dia.of roller d ₁ (mm)	链板高度 Height of sidebar h	链板厚度 Thickness of sidebar T(mm)	销轴长度 Length of pin L(mm)	销轴直径 Dia. of pin d ₂ (mm)	附板高度 Height of sidebar H ₁ (mm)	抗拉强度 Tensile strength Q(kN)
FU型提升机链Lifting Chain for FU Model Machine									
FU150-101.6	101.6	27	26.5	35	6	70	11.5	42.5	126
FU200-152.4	152.4	36.5	35	50	8	90	15.5	65	244
FU270-152.4	152.4	36.5	36	50	8	90	15.5	85	244
FU350-200	200	51.8	41	60	10	120	19.1	129	292.8
FU410-200	200	51.8	41	60	10	120	19.1	148	292.8
FU500-300	300	67.4	63.5	90	12	141	31.75	180	410
FU600-300	300	57.4	48.5	75	10	126	22.2	215	310

汽车喷涂线输送链 Conveyor Chains for Automobile Spray Painting Line

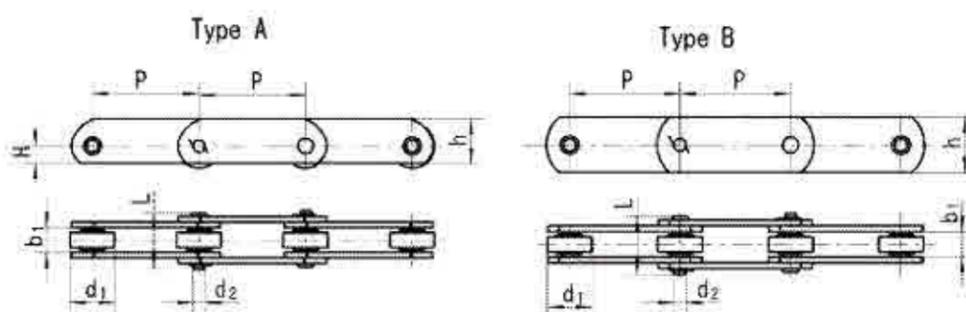

链号 Chain No.	节距 Pitch P mm	内节内宽 Inner width of inner link b, mm	滚子直径 Dia. of roller d, mm	销轴 pin		链板 Sidebar			抗拉强度 Tensile strength Q kN	每米净重 Weight per meter q Kg/m	型号 Type
				d ₂ mm	L mm	h mm	H mm	T mm			
CC5	152.4	35	63.5	17.6	83.5	63.5	25	8	300	15.7	A
CC5-N	152.4	35	63.5	17.6	83.5	76.2	-	8	300	18.3	B

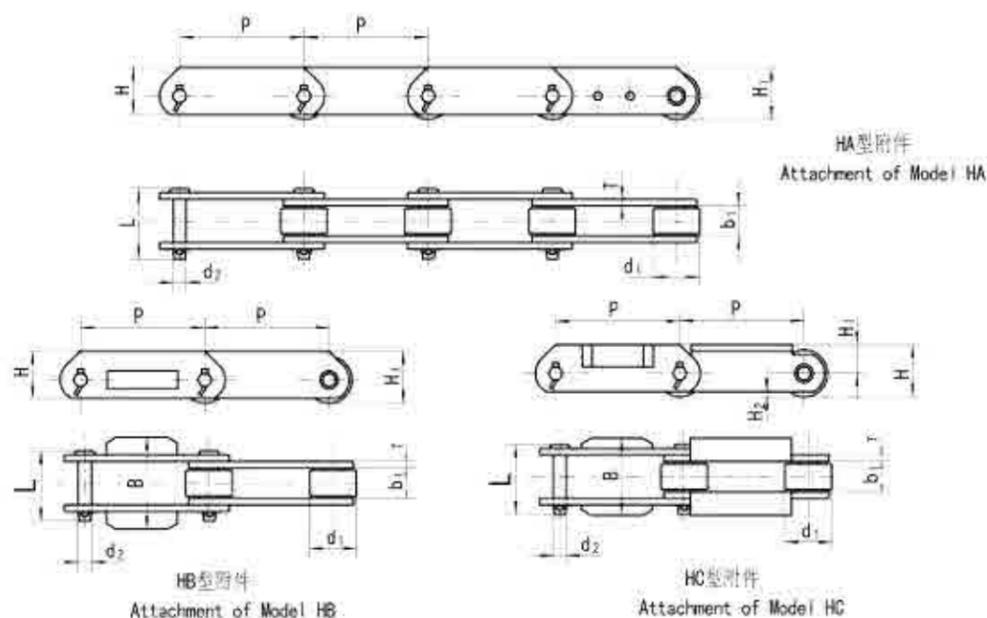


汽车制造驮载链 (滑撬链) Loading Chain for Automobile Manufacture (Skid Chain)


链号 Chain No.	节距 Pitch P mm	内节内宽 Inner width of inner link b, mm	滚子直径 Dia. of roller d ₁ mm	销轴 pin		链板 Sidebar		链条高度 Height of chain H, mm	抗拉强度 Tensile strength Q kN	每米净重 Weight per meter q Kg/m
				d ₂ mm	L mm	H mm	T mm			
W100	100	16.1	31.8	7.92	39	32	3.2	36.9	30	
W100	100	22	40	11.1	44.5	40	4.5	44	70	
W150	150	22	40	11.1	44.5	40	4.5	44	70	
W125	125	38.5	60	11.1	76	60	6	66	160	
W160	160	38.5	60	14.27	76	60	6	66	160	15.8
W200	200	37.1	65	15.9	88	68	8	73.5	190	13.3
W250	250	37.1	65	15.9	90.5	68	8	73.5	190	18.8
W250	250	51.4	80	19.1	106	80	10	90	250	
W300	300	51.4	80	19.1	106	80	10	90	250	
W300	300	57.2	85	22.2	126	95	10	95.5	285	
W250	250	66.7	110	25.4	136	102	12.7	112	485	

汽车淋水线链条 (不锈钢)

Conveyor Chains for Automobile Showering Line (Stainless Steel)

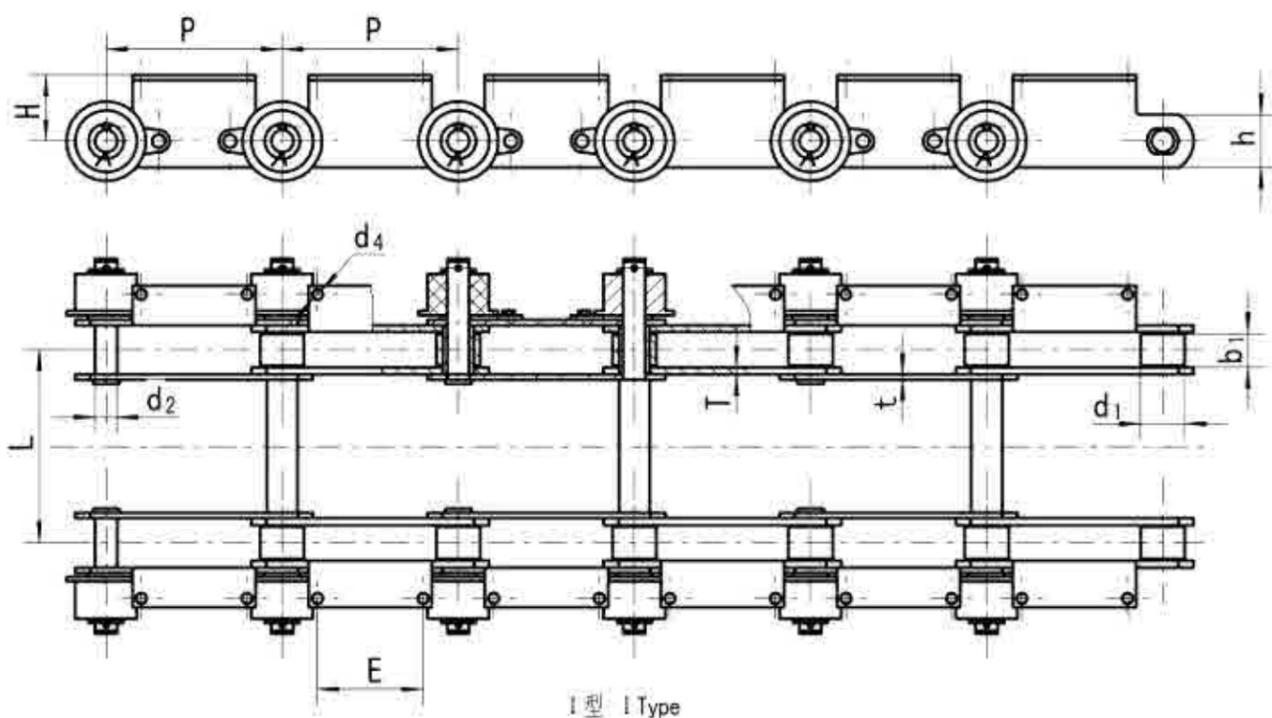


节距 Pitch P mm	内节内宽 Inner width of inner link b,mm	滚子直径 Dia. of roller d _r mm	销轴直径 Diameter of pin d ₂ mm	链板 Sidebar		链条中心距 Center distance of chain L mm	附板 Attachment sidebar		翼板高度 Height of att sidebar H mm	抗拉强度 Tensile strength Q kN
				h mm	t/T mm		E mm	d ₁ mm		
200	40	50	25	60	6/8	370	120	12	75	260

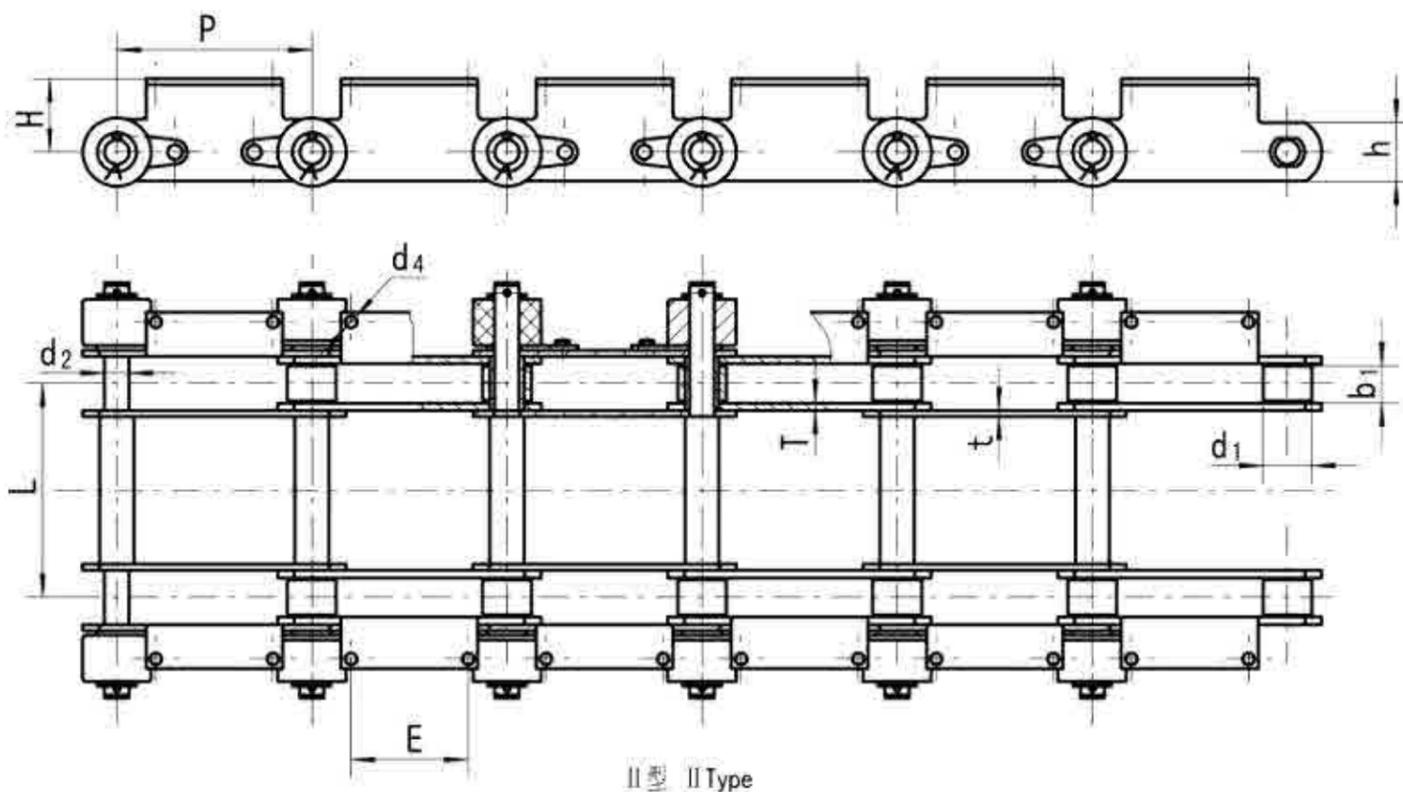

节距 Pitch P mm	内节内宽 Inner width of inner link b,mm	滚子直径 Dia. of roller d _r mm	销轴直径 Diameter of pin d ₂ mm	链板 Sidebar		链条中心距 Center distance of chain L mm	附板 Attachment sidebar		翼板高度 Height of att sidebar H mm	抗拉强度 Tensile strength Q kN
				h mm	t/T mm		E mm	d ₁ mm		
200	40	50	25	60	6/8	370	120	M10	75	260


汽车淋水线链条 (不锈钢)

Conveyor Chains For Automobile Showering Line Chain(Stainless Steel)

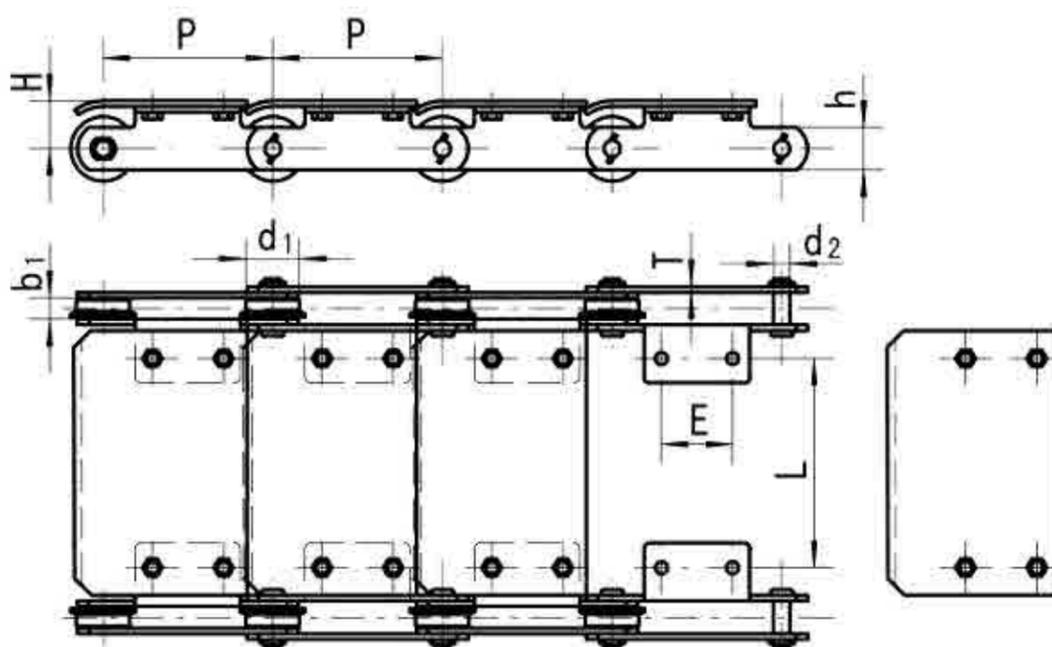

III型 III Type


节距 Pitch P mm	内节内宽 Inner width of inner link b,mm	滚子直径 Dia.of roller d ₁ mm	销轴直径 Diameter of pin d ₂ mm	链板 Sidebar		链条中心距 Center distance of chain L mm	附板 Attachment sidebar		翼板高度 Height of att sidebar H mm	抗拉强度 Tensile strength Q kN
				h mm	T mm		E mm	d ₃ mm		
152.4	19.5	48	14.8	38	5	302.5	64	11	43	70

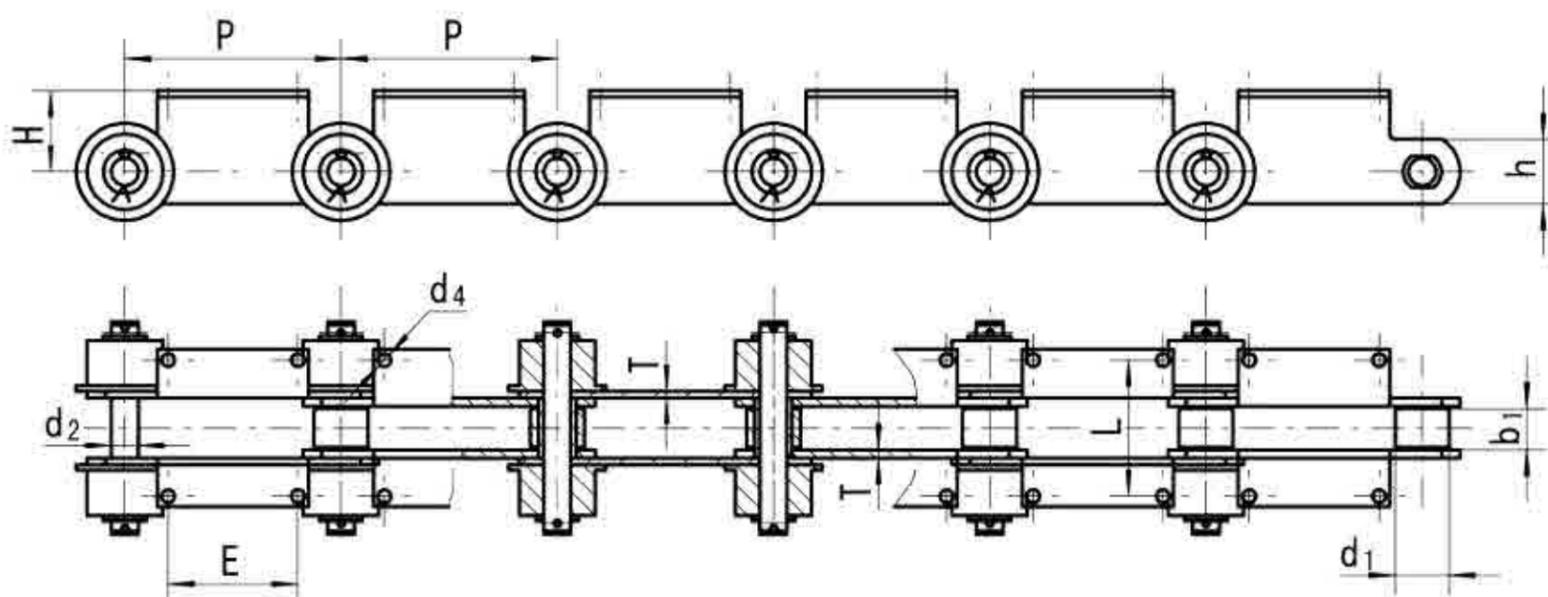

IV型 IVType


节距 Pitch P mm	内节内宽 Inner width of inner link b,mm	滚子直径 Dia.of roller d ₁ mm	销轴直径 Diameter of pin d ₂ mm	链板 Sidebar		链条中心距 Center distance of chain L mm	附板 Attachment sidebar		翼板高度 Height of att sidebar H mm	抗拉强度 Tensile strength Q kN
				h mm	T mm		E mm	d ₃ mm		
250	42	40.1	19	50	6	116	140	12	90	160

窄系列焊接弯板链 Narrow Series Welded Steel Chains

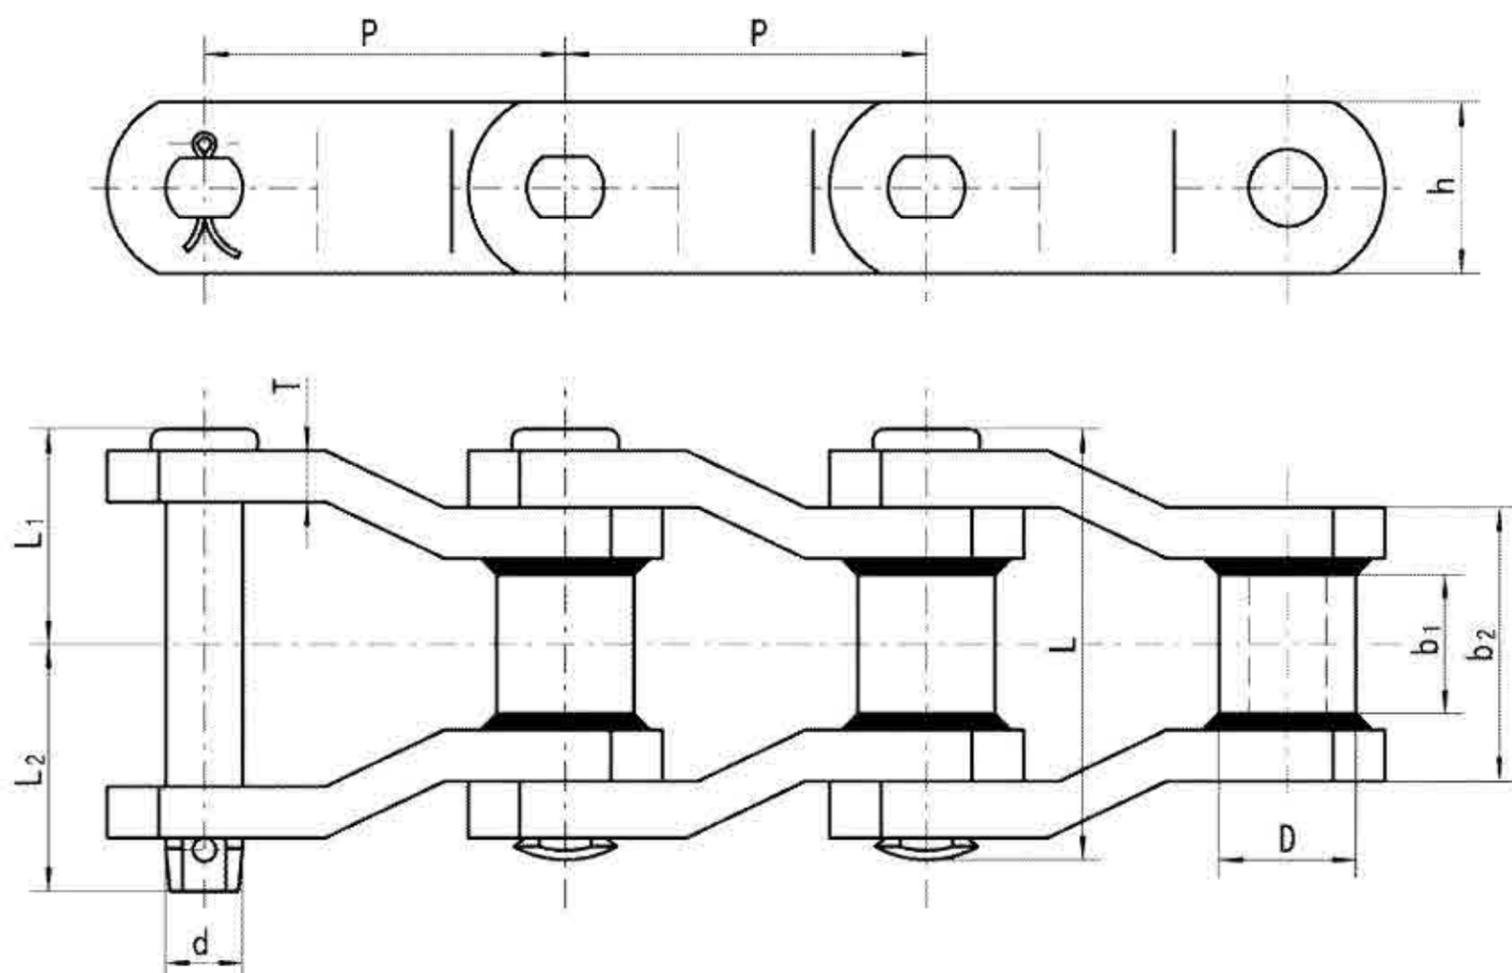


链号	节距	窄端		套筒外径	链板		销轴			最小抗拉强度	许用工作载荷	每米净重	
Chain No.	Pitch	Narrow end		Bush diameter	Sidebars		Pin			Ultimate tensile strength	Rated working load	Weight per meter	
	P mm	b ₁ (min) mm	b ₂ (max) mm	D(max) mm	h mm	T mm	d mm	L mm	L ₁ mm	L ₂ mm	Q _{min} kN	kN	q kg/m
WR78	66.27	28.6	51	22.23	28.4	6.4	12.7	73	36.3	39.5	106.8	17.80	5.92
WH78	66.27	28.4	51	22.23	28.4	6.4	12.7	72.3	36.3	39.5	160	26.67	5.92
DWR78	66.27	28.4	51	21.2	32	6.4	12.7	72.3	36.3	39.5	130	17.80	6.39
DWH78	66.27	28.4	51	21.2	32	6.4	12.7	72.3	36.3	39.5	160	26.67	6.39
WH78-N	66.27	28.6	51	22.8	31.8	7	12.7	75	37.5	41	210	35.00	7.02
WS78	66.27	20	41.3	21.3	25.4	6.4	12.7	62.9	31.5	34.6	106	17.67	5.04
AF78	66.27	28.4	51	27	31.8	6.4	12.7	72.3	36.3	39.5	106.8	17.80	6.98
*WR78SS	66.27	28.4	52.3	21.2	28.4	6.4	12.7	72.3	36.3	39.5	80	13.33	6.31
WR82	78.1	32	57	25.4	31.8	6.4	14.29	79.5	40	43.5	133.4	22.23	6.85
WH82	78.1	32	57	27	31.8	6.4	14.27	79.5	40	43.5	177.8	29.63	7.14
WH82-N	78.1	31.8	57.1	25.4	31.8	6.4	14.27	79.5	40	43.5	177.8	29.63	6.85

窄系列焊接弯板链 Narrow Series Welded Steel Chains

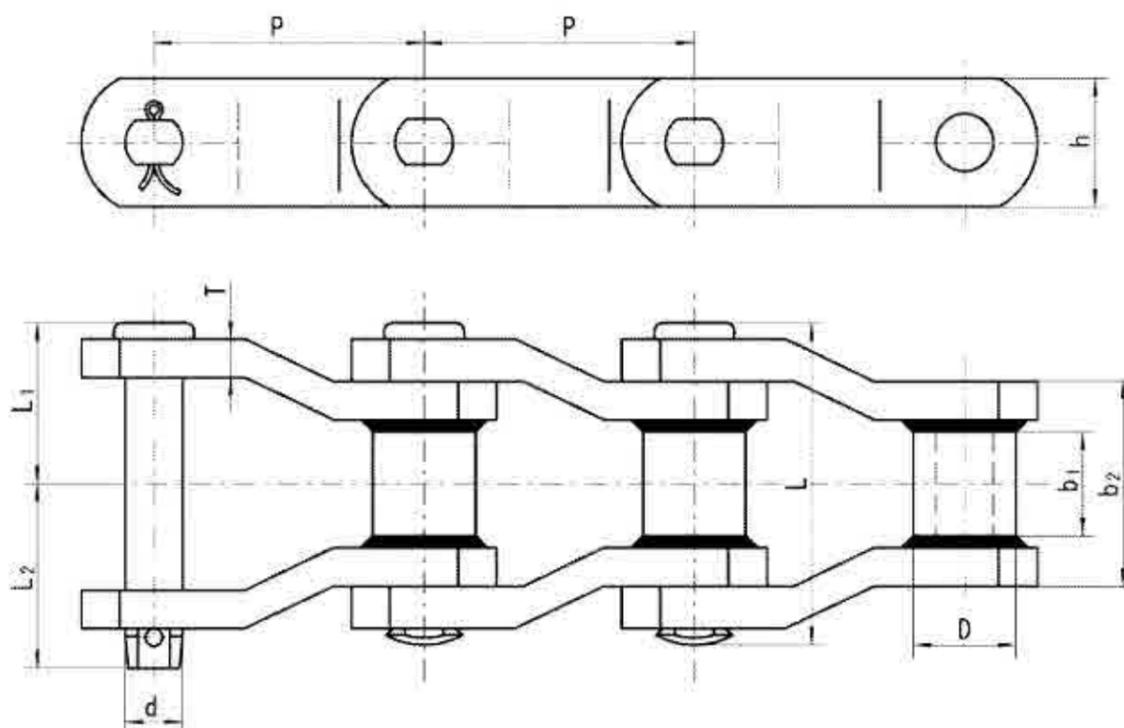


链号	节距	窄端		套筒外径	链板		销轴				最小抗拉强度	许用工作载荷	每米净重
Chain No.	Pitch	Narrow End		Bush diameter	Sidebars		Pin				Ultimate tensile strength	Rated working load	Weight per meter
	P mm	b ₁ (min) mm	b ₂ (max) mm	D(max) mm	h mm	T mm	d mm	L mm	L ₁ mm	L ₂ mm	Q _{min} kN	kN	q kg/m
WR106	152.4	41.2	71.6	37.1	38.1	9.7	19.13	102.5	52	56	176.7	29.45	9.6
WH106	152.4	41.2	71.6	31.75	38.1	9.5	19.05	102.5	52	56	266	44.33	9.6
WR111	120.9	57.2	85.7	37.1	38.1	9.7	19.05	110.2	59.35	63.25	154	25.67	13
WH111	120.9	50.8	85.7	31.75	38.1	9.7	19.05	110.2	59.35	63.25	224	37.33	13
WR124	101.6	41.2	71.5	37.1	38.1	9.5	19.05	102.5	52	56	204	34.00	11.52
WH124	101.6	41.2	71.5	37.1	38.1	9.5	19.05	102.5	52	56	266.7	44.45	11.52
WR132	153.67	76.2	111.6	44.7	50.8	12.7	25.48	152.7	77.3	81.7	275.8	45.97	21.03
WH132	153.67	76.2	111.6	44.5	50.8	12.7	25.4	152.7	77.3	81.7	378.1	63.02	21.03
WR150	153.67	76.2	111.6	44.45	63.5	12.7	25.4	152.7	77.3	81.7	450	75.00	24.86
WH150	153.67	76.2	111.6	44.5	63.5	12.7	25.4	152.7	77.3	81.7	600	100.0	24.86
WH720S	152.4	28.5	55	32	40	10	19.05	-	44.5	49.5	224	37.33	9.65
FWHX150	153.67	71	110	44.5	65	12	25	148.7	75	81	540	90	24.7

窄系列焊接弯板链 Narrow Series Welded Steel Chains

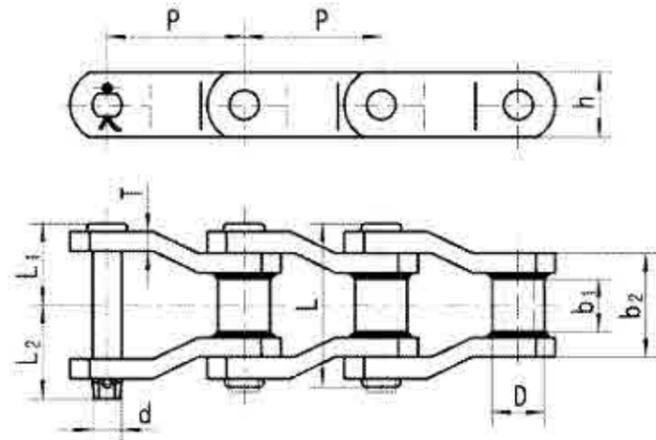


链号 Chain No.	节距	窄端		套筒外径	链板		销轴				最小抗拉强度	许用工作载荷	每米净重
	Pitch	Narrow End		Bush diameter	Sidebars		Pin				Ultimate tensile strength	Rated working load	Weight per meter
	P mm	b ₁ (min) mm	b ₂ (max) mm	D(max) mm	h mm	T mm	d mm	L mm	L ₁ mm	L ₂ mm	Q(min) kN	kN	q kg/m
WR78XHD	66.95	25.4	51.2	25.4	31.8	9.5	14.27	79.5	40.5	45	133	22.17	9.32
WH78XHD	66.95	25.4	51.2	25.4	31.8	9.5	14.27	79.5	40.5	45	160	26.67	9.32
WR82XHD	78.1	28.6	60.8	31.75	38.1	9.5	19.05	91.8	46.7	50.6	224	37.33	12.7
WH82XHD	78.1	28.6	60.8	31.75	38.1	9.5	19.05	91.8	46.7	50.6	253	42.17	12.7
WR124XHD	103.2	38.1	76.3	41.28	50.8	12.7	25.4	117.4	59.68	64.02	373.4	62.23	21.23
WH124XHD	103.2	38.1	76.3	41.28	50.8	12.7	25.4	117.4	59.68	64.02	542.3	90.38	21.23

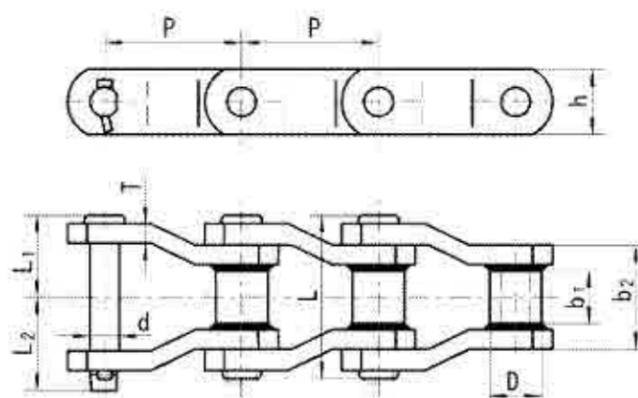


链号 Chain No.	节距	窄端		套筒外径	链板		销轴				最小抗拉强度	许用工作载荷	每米净重
	Pitch	Narrow End		Bush diameter	Sidebars		Pin				Ultimate tensile strength	Rated working load	Weight per meter
	P mm	b ₁ (min) mm	b ₂ (max) mm	D(max) mm	h mm	T mm	d mm	L mm	L ₁ mm	L ₂ mm	Q(min) kN	kN	q kg/m
WHX124	101.6	41.2	71.11	36.53	38.1	9.5	19	105.6	51.88	56.12	225	37.50	12.45
WHX132	153.67	72.1	111.76	44.45	50.8	12.7	25.2	151.3	77.54	84.16	377.8	62.97	20.42
WHX150	153.67	72.1	111.76	44.45	63.5	12.7	25.2	151.3	77.54	84.16	400	66.67	24.48
WHX155	153.67	69.85	112.01	44.45	63.5	14.3	28.37	154.8	78.03	86.87	453	75.50	27.42
WHX157	153.67	69.85	118.11	44.45	63.5	15.9	28.52	163.3	82.1	91.9	520	86.67	29.03

窄系列焊接弯板链附件
Narrow Series Welded Steel Chains-Attachments

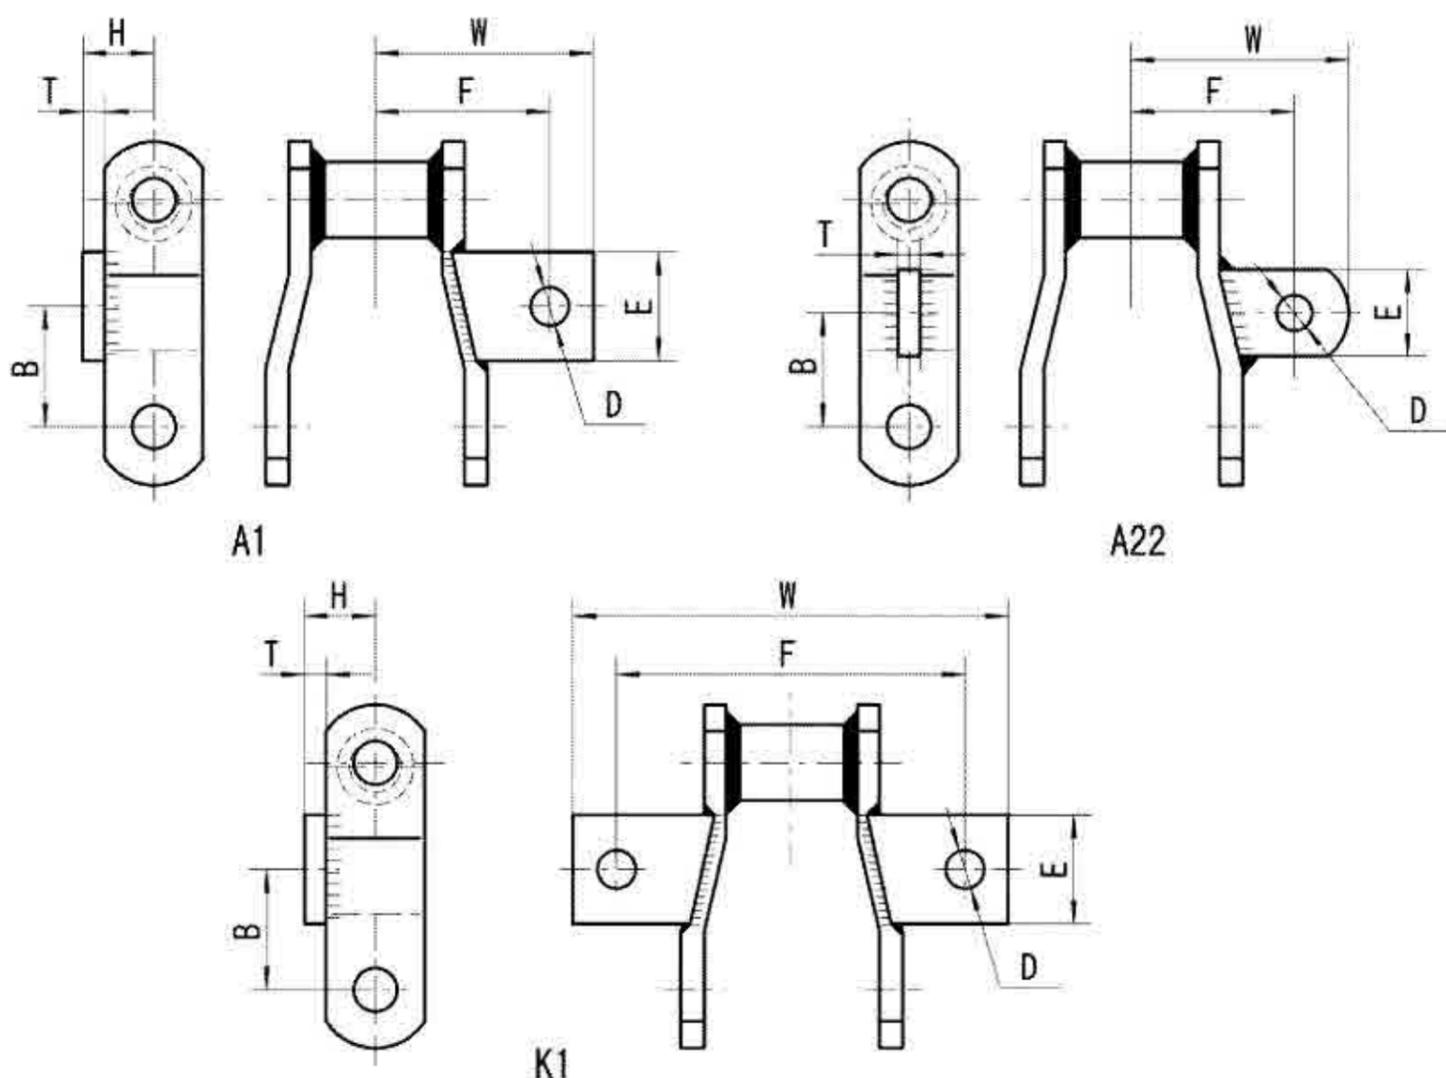


链号 Chain No.	B mm	D mm	E mm	F mm	H mm	W mm	T mm
A1							
WH78	31.75	10.4	31.75	50.8	20.7	63.5	6.4
WH82	38.1	10.4	44.45	53.1	22.3	69.85	6.4
A22							
WH78	33.3	10.4	25.4	47.8	-	63.5	9.5
K1							
WH78	31.75	10.4	31.75	101.6	20.7	127	6.4
WH82	38.1	10.4	44.45	106.2	22.3	139.7	6.4

窄系列焊接弯板链附件 Narrow Series Welded Steel Chains-Attachments

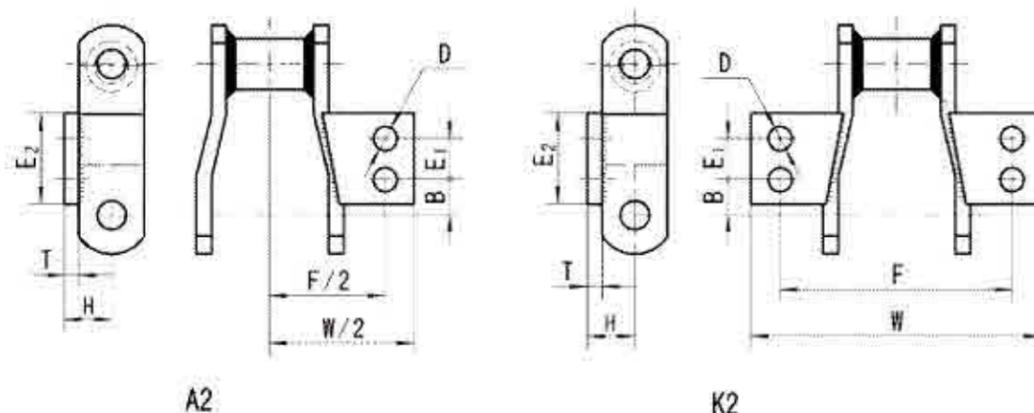


链号 Chain No.	B mm	D mm	E ₁ mm	E ₂ mm	F mm	H mm	W mm	T mm
A2, K2								
WH78	10.4	10.4	28.7	50.8	101.6	20.7	127	6.4
WH82	19.05	10.4	33.3	57.15	108.2	22.3	136.6	6.4
WHX124	22.4	10.4	49.3	76.2	133.6	28.6	162	9.5
WHX132	41.4	14.3	69.85	108	190.5	38.1	233.2	12.7
WHX150	41.4	14.3	69.85	106.5	190.5	44.45	233.2	12.7
WHX155	41.4	14.3	69.85	106.5	190.5	46	233.2	14.3
WHX157	44.45	14.3	63.5	101.6	203.2	47.75	242.8	16

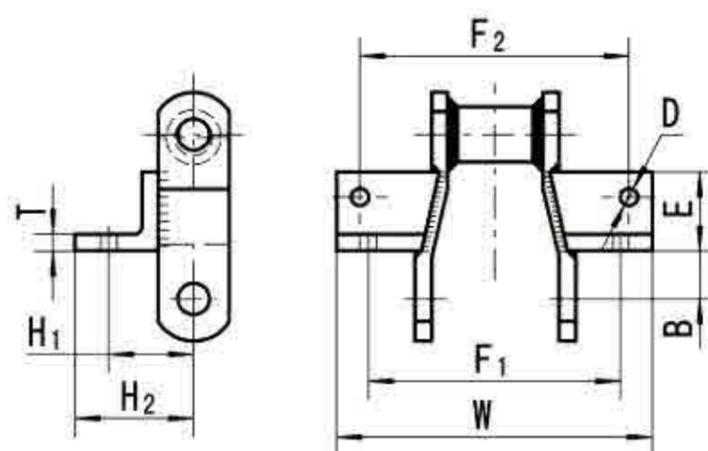


链号 Chain No.	B mm	D mm	E mm	F ₁ mm	F ₂ mm	H ₁ mm	H ₂ mm	T mm	W mm
F2									
WH78	14.23	10.4	31.75	95.25	/	36.58	58.67	6.4	119
F4									
WH78	17.53	10.4	31.75	95.25	114.3	44.45	58.67	6.4	139.7
WH82	20.57	10.4	28.7	104.9	127	45.97	60.45	6.4	150.9
WHX124	22.35	10.4	36.07	111.25	133.35	52.32	77.72	9.5	157.2

窄系列焊接弯板链附件 Narrow Series Welded Steel Chains-Attachments

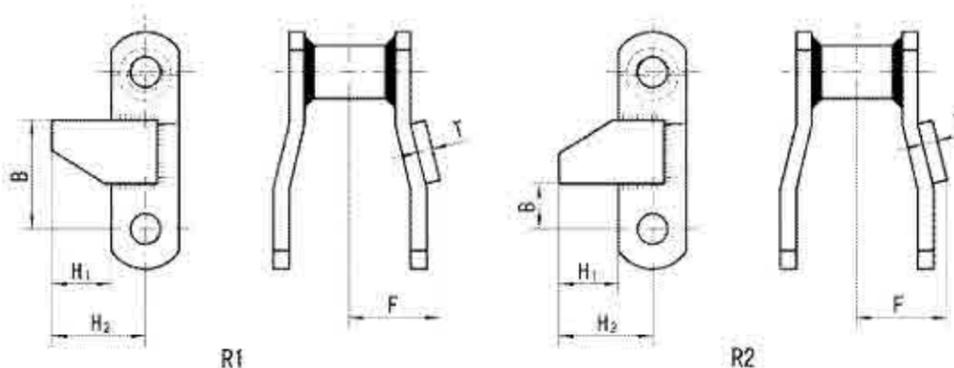


链号 Chain No.	B mm	F mm	H ₁ mm	H ₂ mm	T mm
R1					
WH78	47.75	38.1	25.4	39.7	6.4
WH82	55.4	41.4	31.85	47.75	6.4
WHX124	69.1	54.9	28.7	47.75	9.5
R2					
WH78	17.5	38.1	25.4	39.7	6.4
WH82	22.4	41.4	31.85	47.75	6.4
WHX124	31.75	54.9	28.7	47.75	9.5

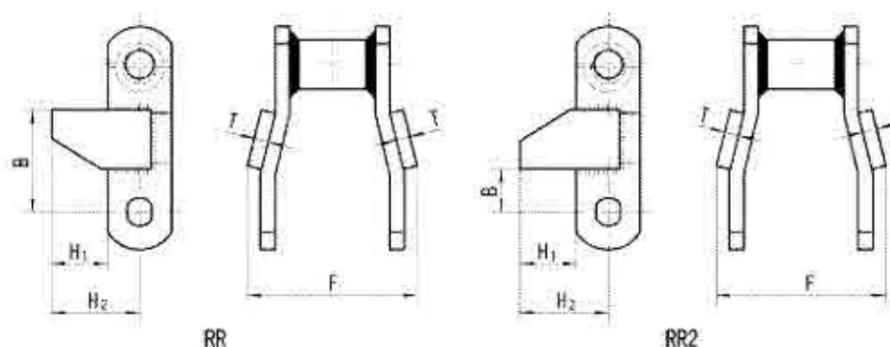


链号 Chain No.	B mm	F mm	H ₁ mm	H ₂ mm	T mm
RR					
WH78	47.75	76.2	25.4	39.7	6.4
WH82	55.4	82.8	31.85	47.75	6.4
WHX124	69.1	109.8	28.7	47.75	9.5
RR2					
WH78	17.5	76.2	25.4	39.7	6.4
WH82	22.4	82.8	31.85	47.75	6.4
WHX124	31.75	109.8	28.7	47.75	9.5

窄系列焊接弯板链附件
Narrow Series Welded Steel Chains-Attachments


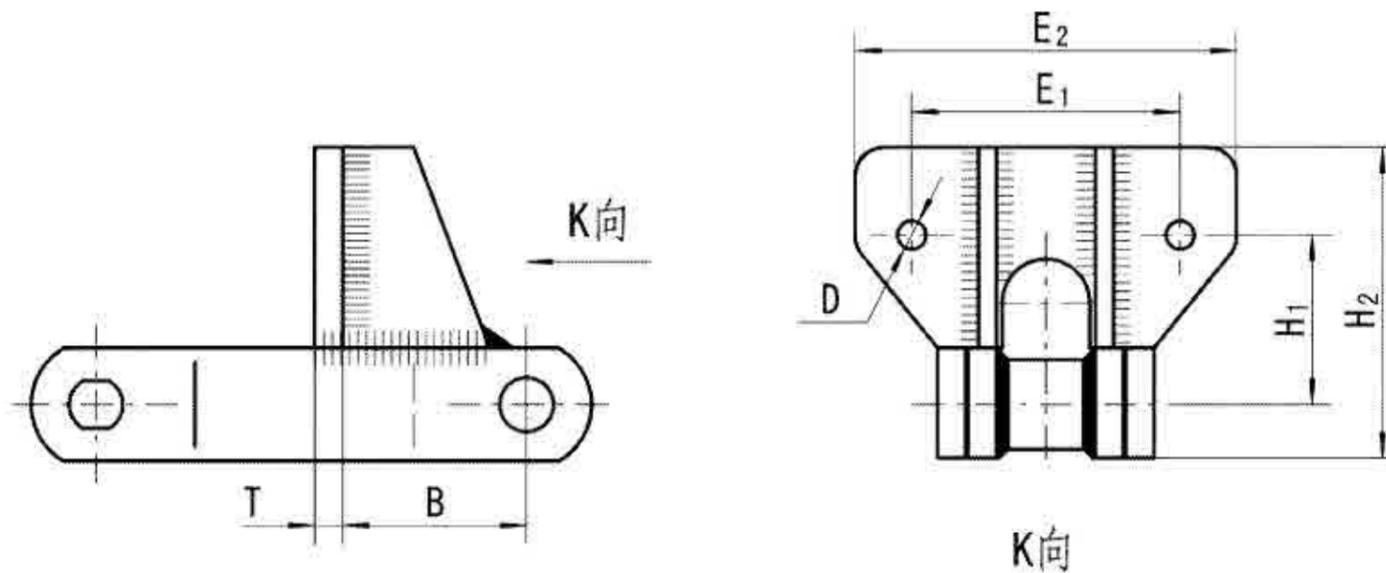


链号 Chain No.	H ₁ mm	H ₂ mm	E ₁ mm	E ₂ mm	D mm	B mm	T mm
F226							
WH720S	60	110	95	135	10	66	10


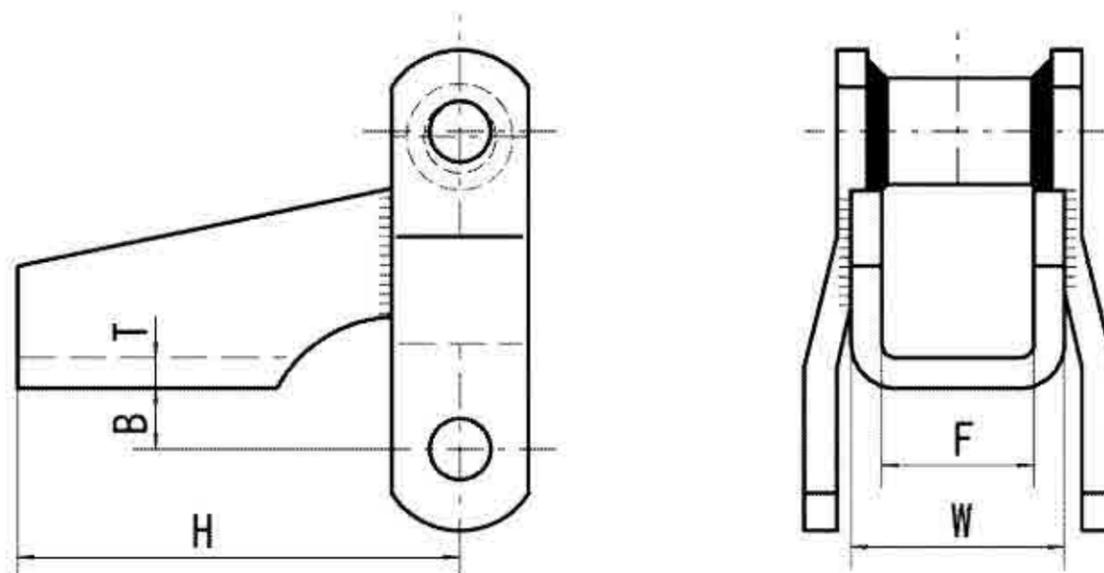


链号 Chain No.	B mm	F mm	H mm	T mm	W mm
H ₁					
WH78	12.7	31.7	92.2	6.4	44.5
WH82	16	38	92.2	6.4	50.8

窄系列焊接弯板链附件 Narrow Series Welded Steel Chains-Attachments

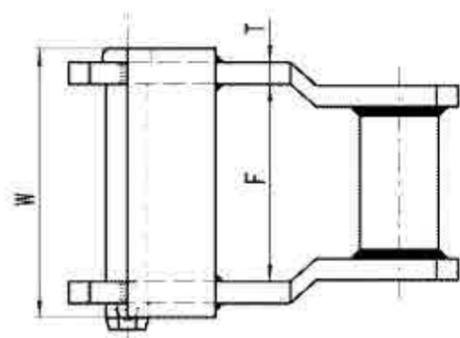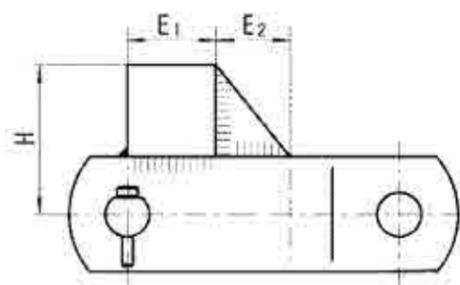


链号 Chain No.	E, mm	E ₂ mm	F(min) mm	H mm	T mm	W mm
71536LT000	50	50	112.7	85.75	12	152

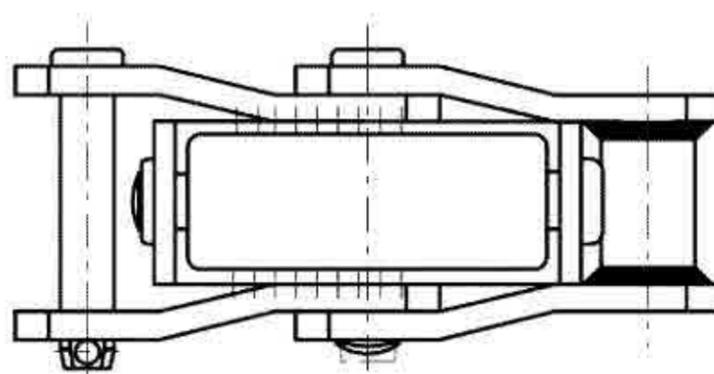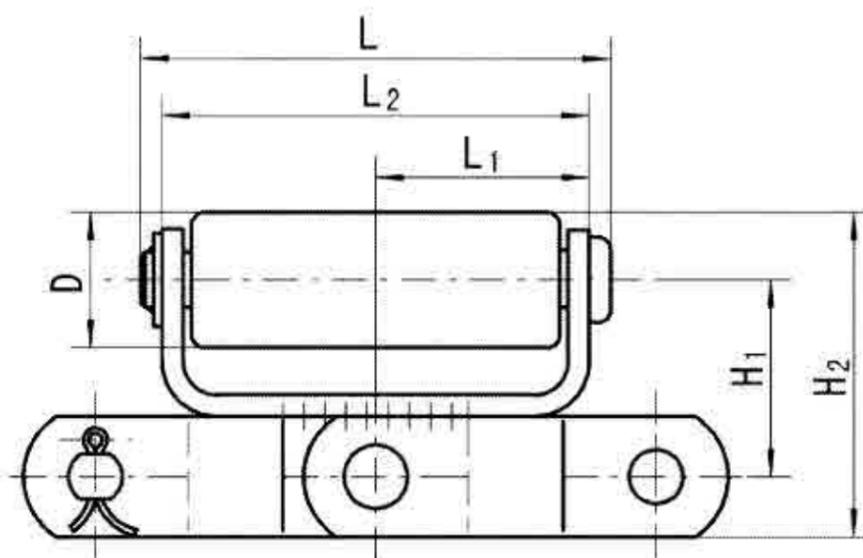


链号 Chain No.	D mm	H ₁ mm	H ₂ mm	L mm	L ₁ mm	L ₂ mm
DWR78-F20	32	46.6	78.5	121	55.5	111

宽系列焊接弯板链
Wide Series Welded Steel Chains

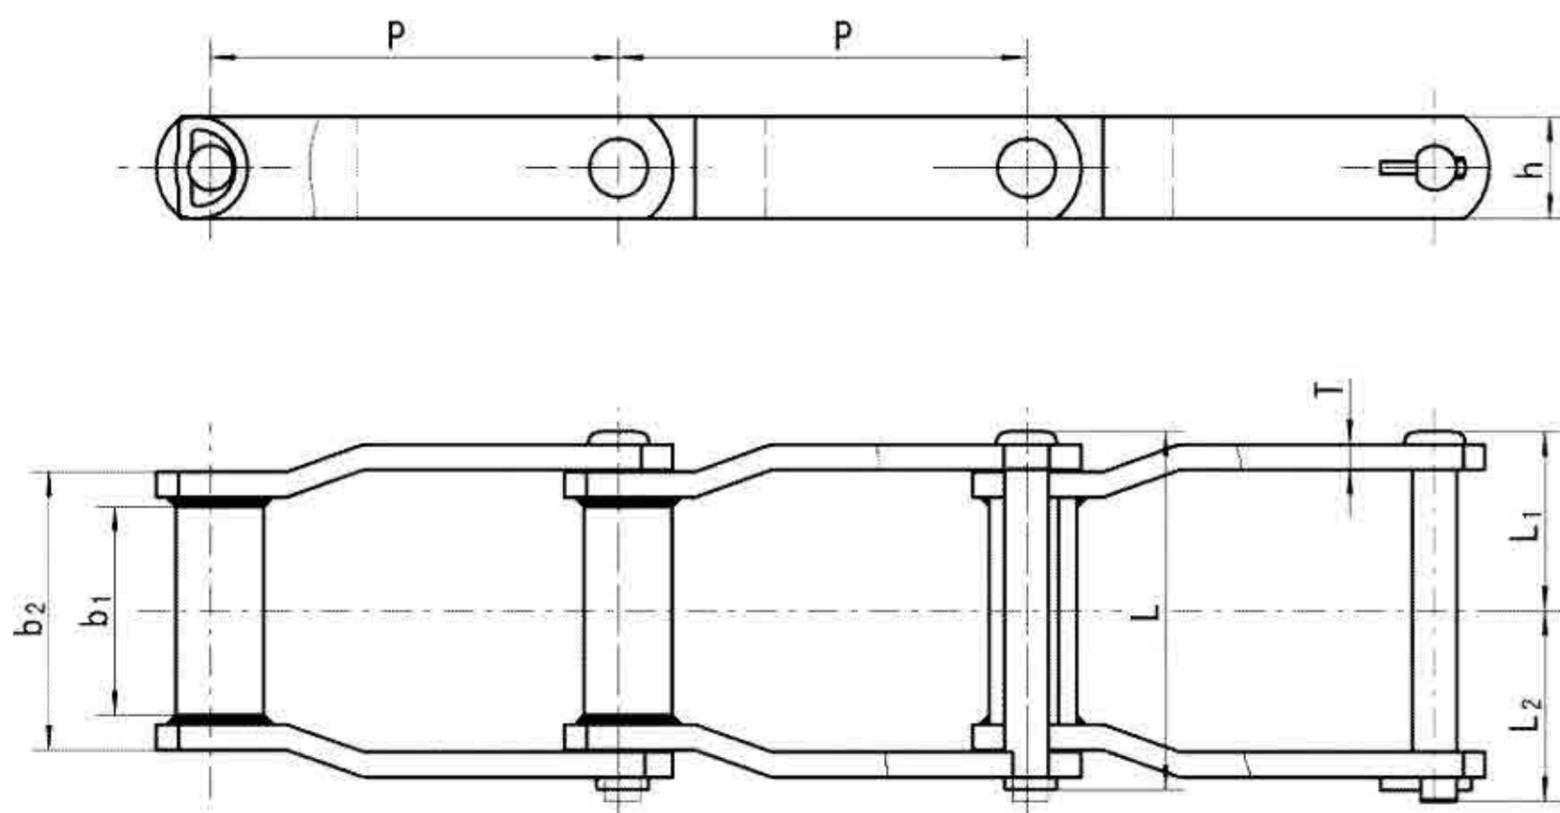


链号	节距	窄端		链板		销轴				最小抗拉强度	许用工作载荷	每米净重
Chain No.	Pitch	Narrow End		Sidebars		Pin				Ultimate tensile strength	Rated working load	Weight per meter
	P mm	b ₁ (min) mm	b ₂ (max) mm	h mm	T mm	d mm	L mm	L ₁ mm	L ₂ mm	Q _{min} kN	kN	q kg/m
WDH110	152.4	228.6	263.53	38.1	9.5	18.9	299.7	147.75	154.45	244.5	40.75	16.90
WDR110	152.4	228.6	263.53	38.1	9.5	18.9	299.7	147.75	154.45	169	28.17	16.90
WDH112	203.2	228.6	263.53	38.1	9.5	18.9	299.7	147.75	154.45	244.5	40.75	14.11
WDR112	203.2	228.6	263.53	38.1	9.5	18.9	299.7	147.75	154.45	169	28.17	14.11
WDH120	152.4	222.25	260.35	50.8	12.7	22.07	305	150.47	156.93	351.4	58.57	28.64
WDR120	152.4	222.25	260.35	50.8	12.7	22.07	305	150.47	156.93	311.4	51.90	28.64
WDH480	203.2	285.75	323.85	50.8	12.7	22.07	369	182.2	188.7	351.4	58.57	26.91
WDR480	203.2	285.75	323.85	50.8	12.7	22.07	369	182.2	188.7	311.4	51.90	26.91

宽系列焊接弯板链
Wide Series Welded Steel Chains

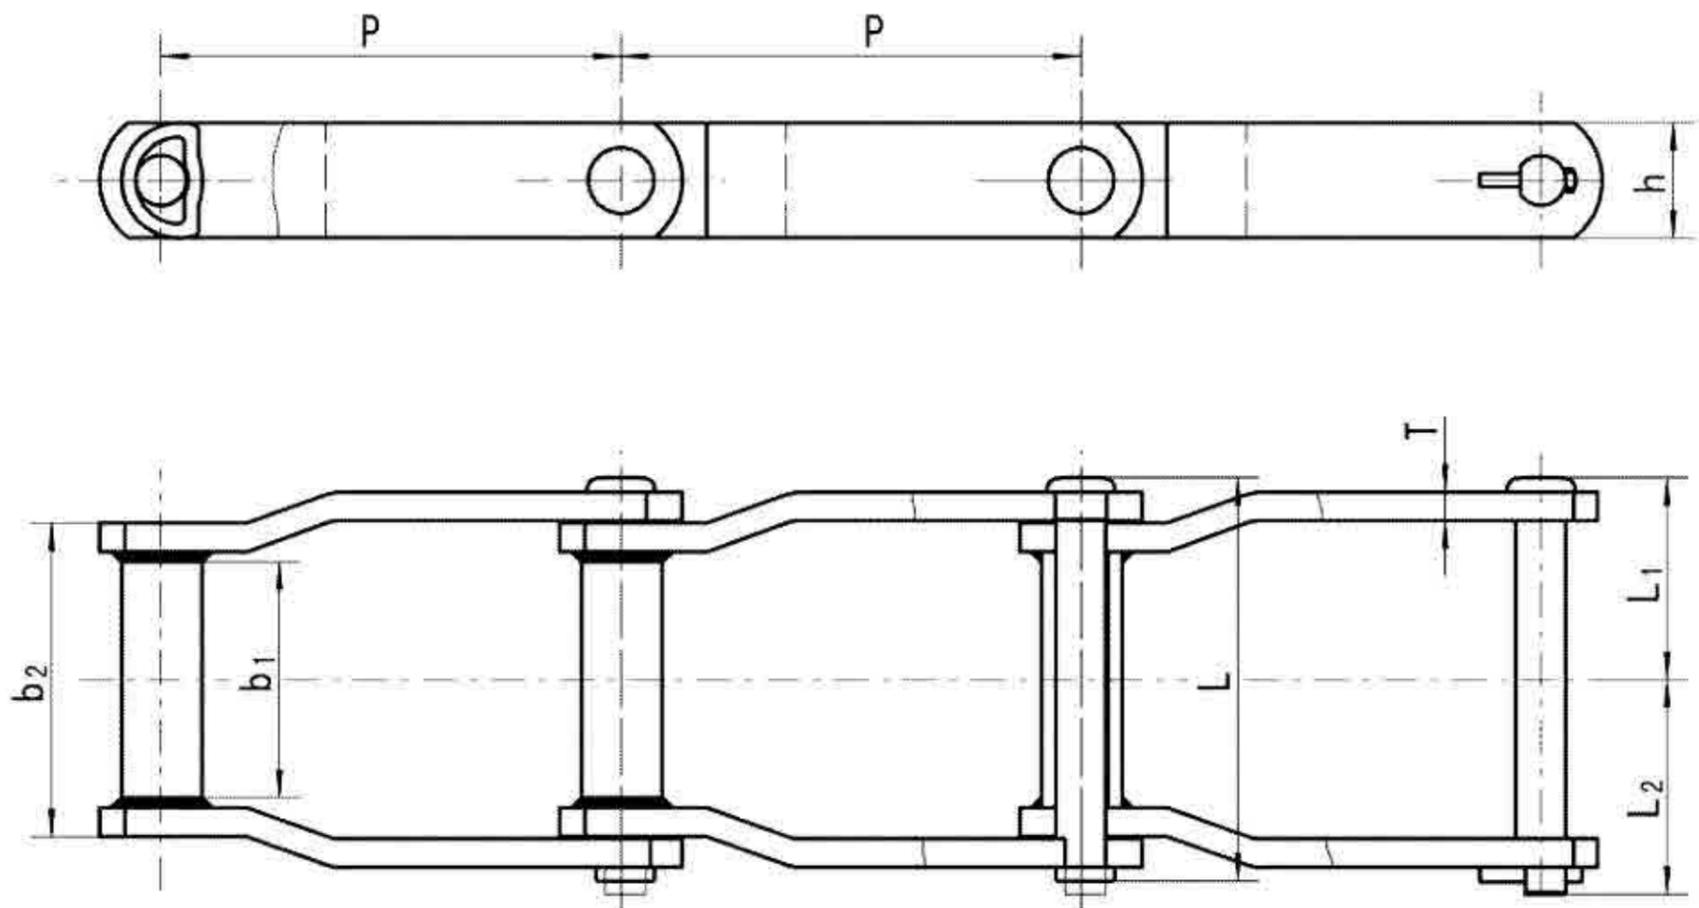

链号	节距	窄端		链板		销轴				最小抗拉强度	许用工作载荷	每米净重
Chain No.	Pitch	Narrow End		Sidebars		Pin				Ultimate tensile strength	Rated working load	Weight per meter
	P/mm	b ₁ (min) mm	b ₂ (max) mm	h mm	T mm	d mm	L mm	L ₁ mm	L ₂ mm	Q _{min} kN	kN	q kg/m
WDH2210	155.85	228.6	263.53	38.1	9.5	18.9	299.7	147.75	154.45	244.5	40.75	16.70
WDR2210	155.85	228.6	263.53	38.1	9.5	18.9	299.7	147.75	154.45	169	28.17	16.70
WDH2380	207.29	285.75	323.85	50.8	12.7	22.07	369	182.2	188.7	351.4	58.57	26.56
WDR2380	207.29	285.75	323.85	50.8	12.7	22.07	369	182.2	188.7	311.4	51.90	26.56


宽系列焊接弯板链附件
Wide Series Welded Steel Chains-Attachments

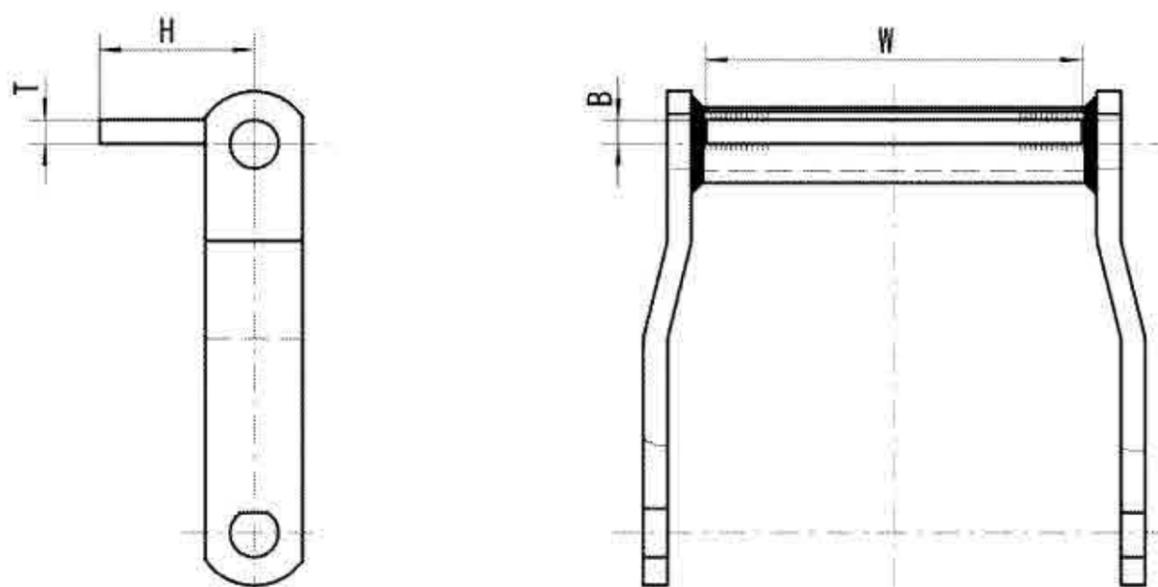

C1, C3, C4

链号 Chain No.	B mm	H mm	T mm	W mm
C1				
WDH110	9.5	60.5	9.5	231.9
WDR110	9.5	60.5	9.5	231.9
WDH112	9.5	60.5	9.5	231.9
WDR112	9.5	60.5	9.5	231.9
C3				
WDH120	12.7	76.2	12.7	219.2
WDR120	12.7	76.2	12.7	219.2
WDH480	12.7	76.2	12.7	282.7
WDR480	12.7	76.2	12.7	282.7
C4				
WDH110	9.5	95.25	9.5	231.9
WDR110	9.5	95.25	9.5	231.9
WDH112	9.5	95.25	9.5	231.9
WDR112	9.5	95.25	9.5	231.9
WDH480	12.7	127	12.7	282.7
WDR480	12.7	127	12.7	282.7


宽系列焊接弯板链附件
Wide Series Welded Steel Chains-Attachments

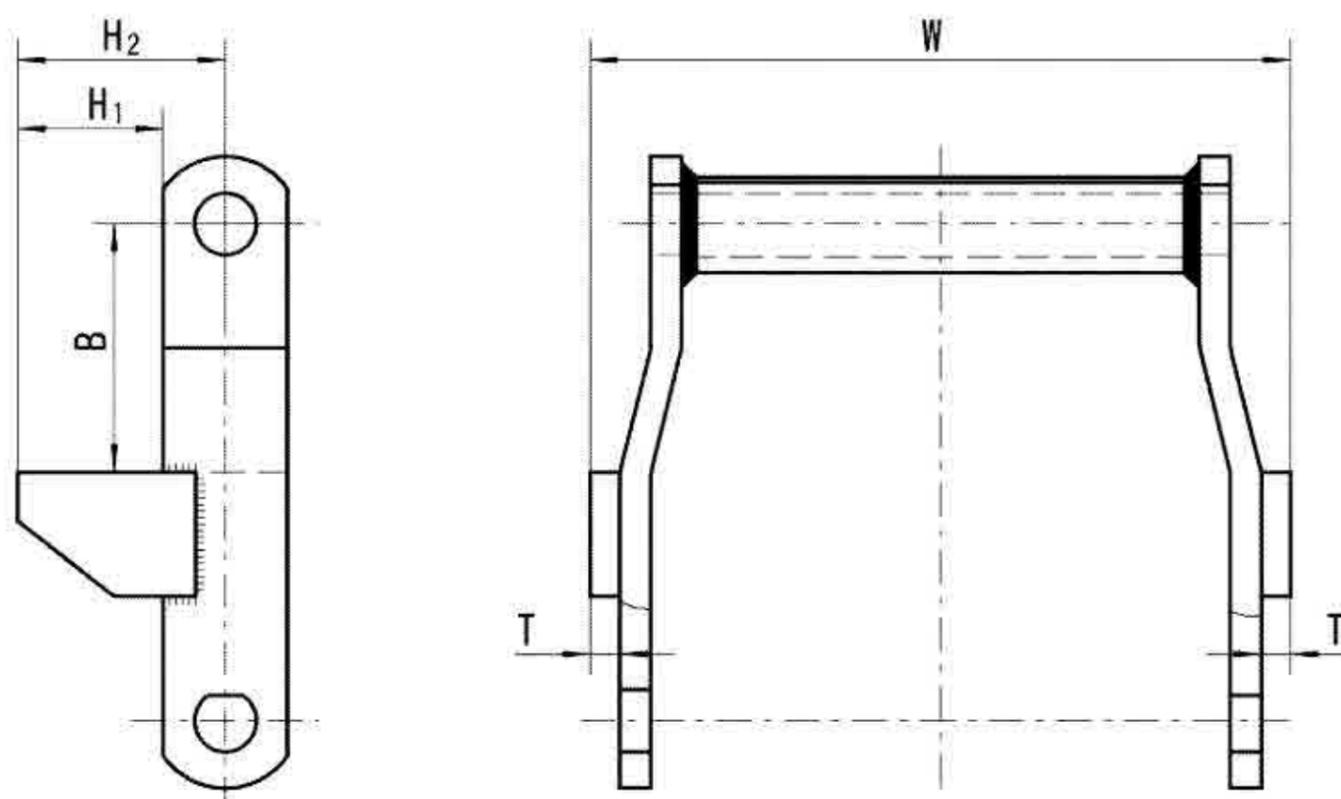


RR

链号 Chain No.	B mm	H ₁ mm	H ₂ mm	T mm	W mm
RR					
WDH110	76.2	44.45	63.5	9.5	302.7
WDR110	76.2	44.45	63.5	9.5	302.7
WDH112	76.2	44.45	63.5	9.5	302.7
WDR112	76.2	44.45	63.5	9.5	302.7
WDH2210	76.2	44.45	63.5	9.5	302.7
WDR2210	76.2	44.45	63.5	9.5	302.7
WDH120	76.2	57.15	82.55	12.7	313.4
WDR120	76.2	57.15	82.55	12.7	313.4
WDH480	76.2	57.15	82.55	12.7	377
WDR480	76.2	57.15	82.55	12.7	377
WDH2380	76.2	57.15	82.55	12.7	377
WDR2380	76.2	57.15	82.55	12.7	377

宽系列焊接弯板链附件 Wide Series Welded Steel Chains-Attachments

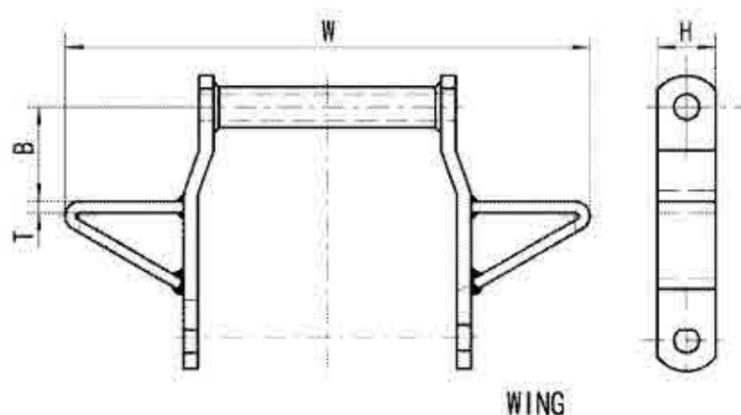


链号 Chain No.	B mm	H mm	T mm	W mm
WING				
WDH110	66.8	38.1	9.5	431.8
WDR110	66.8	38.1	9.5	431.8
WDH112	82.6	38.1	9.5	431.8
WDR112	82.6	38.1	9.5	431.8
WDH2210	57.2	38.1	9.5	431.8
WDR2210	57.2	38.1	9.5	431.8
WDH120	82.6	50.8	12.7	431.8
WDR120	82.6	50.8	12.7	431.8
WDH2380	82.6	50.8	9.5	558.8
WDR2380	82.6	50.8	9.5	558.8
WDH480	82.6	50.8	12.7	558.8
WDR480	82.6	50.8	12.7	558.8

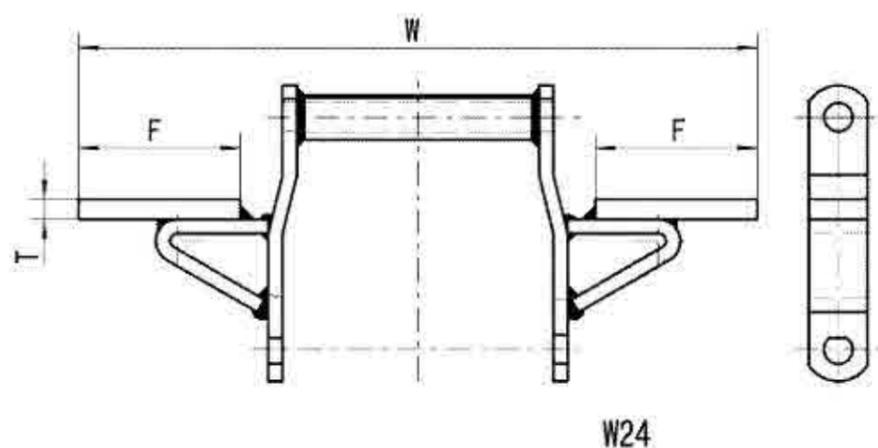

链号 Chain No.	F mm	T mm	W mm
W24			
WDH110	152.4	12.7	609.6
WDR110	152.4	12.7	609.6


60

钢制直输平顶链 Steel Straight Run Flat-Top Chains

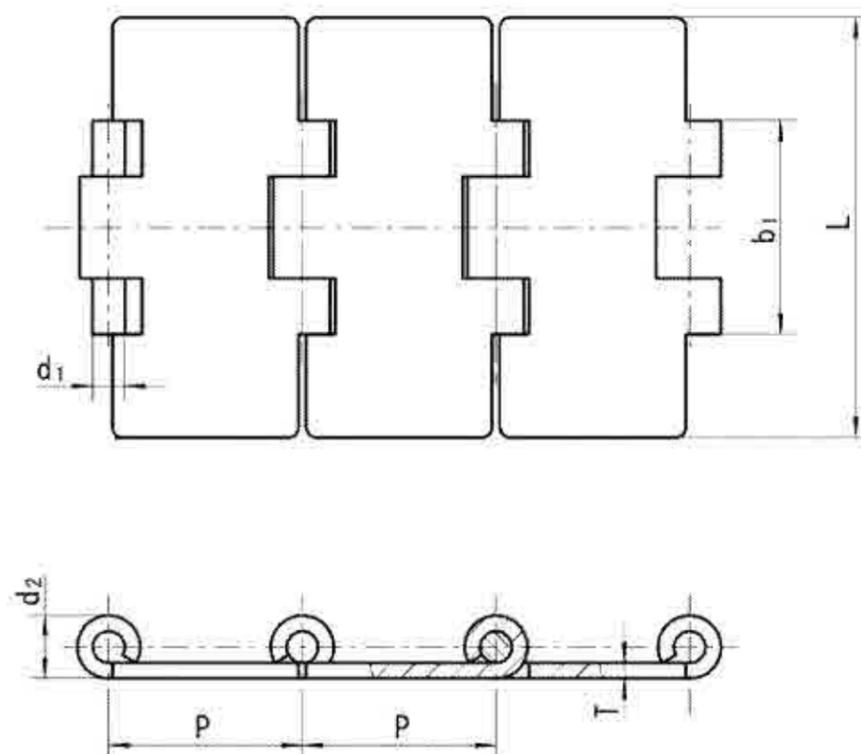

链号 Chain No.	节距 Pitch P mm	链板 宽度 Slat width L mm	固定铰卷 外跨宽 Width over fixed curls b mm	销轴 直径 Pin diameter d, mm	链板 厚度 Slat thickness T mm	铰卷外径 Curl outside diameter d _c (max) mm	最小抗拉强度 Ultimate tensile Strength		每米净重 Weight per meter Q kg/m
							300系列 300 series Q(min) kN	400系列 400 series Q(min) kN	
C12S	38.1	76.2	42	6.35	3.1	13.13	8.00	6.25	2.39
C13S		82.6(82)							
C14S		88.9							
C16S		101.6							
C18S		114.3							
C20S		127.0							
C24S		152.4							
C30S		190.5							
C30D	190.5	80.5	16	12.5	5.87				


钢制曲输平顶链 Steel Sideflex Flat-Top Chain

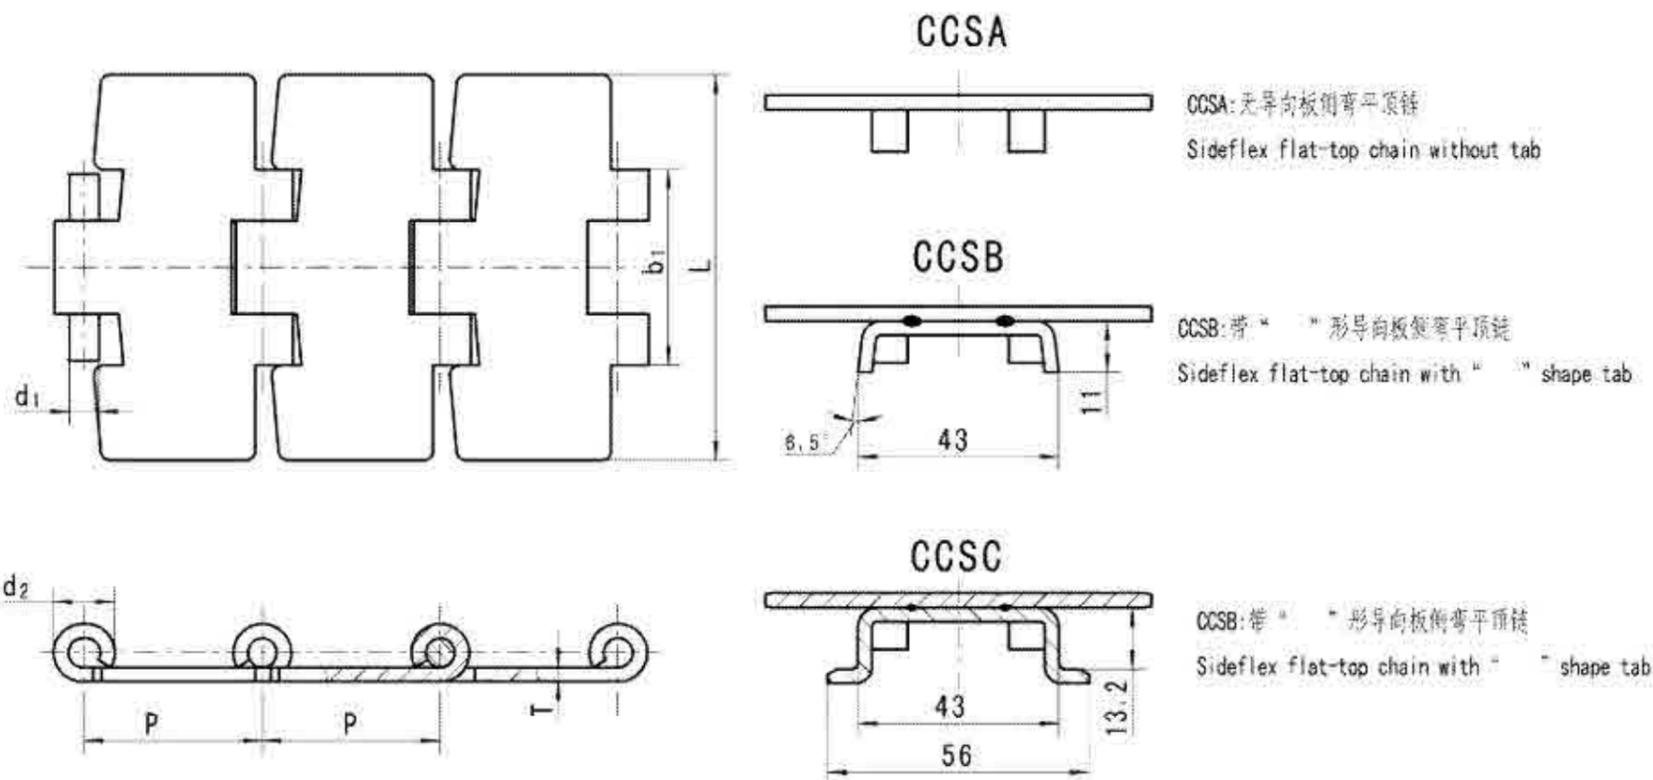

62


链号 Chain No.	节距 Pitch P mm	链板 宽度 Slat width L mm	固定铰卷 外跨宽 Width over fixed curls b ₁ mm	销轴 直径 Pin diameter d ₁ mm	链板 厚度 Slat thickness T mm	铰卷外径 Curl outside diameter d ₂ (max) mm	侧弯半径 Sideflex radius: R(min) mm	最小抗拉强度 Ultimate tensile Strength		每米净重 Weight per meter Q kg/m
								300系列 300 series Q(min) kN	400系列 400 series Q(min) kN	
CC13SA	38.1	82.6	42	6.35	3.1	13.8	460	7.20	5.60	2.52
CC13SB			38.5							2.85
CC13SC			42							3.08
CC14SA		88.9	42							2.67
CC14SB			38.5							3.0
CC14SC			42							3.23
CC16SA		101.6	42							2.93
CC16SB			38.5							3.26
CC16SC			42							3.49
CC18SA		114.3	42							3.15
CC18SB			38.5							3.78
CC18SC			42							3.60
CC24SA		152.4	42							3.96
CC24SB			38.5							4.31
CC24SC			42							4.54
CC30SA	190.5	42	4.70							
CC30SB		38.5	5.06							
CC30SC		42	5.29							

重载弯板滚子链链轮
Heavy-duty Cranked-Link Chains Sprocket

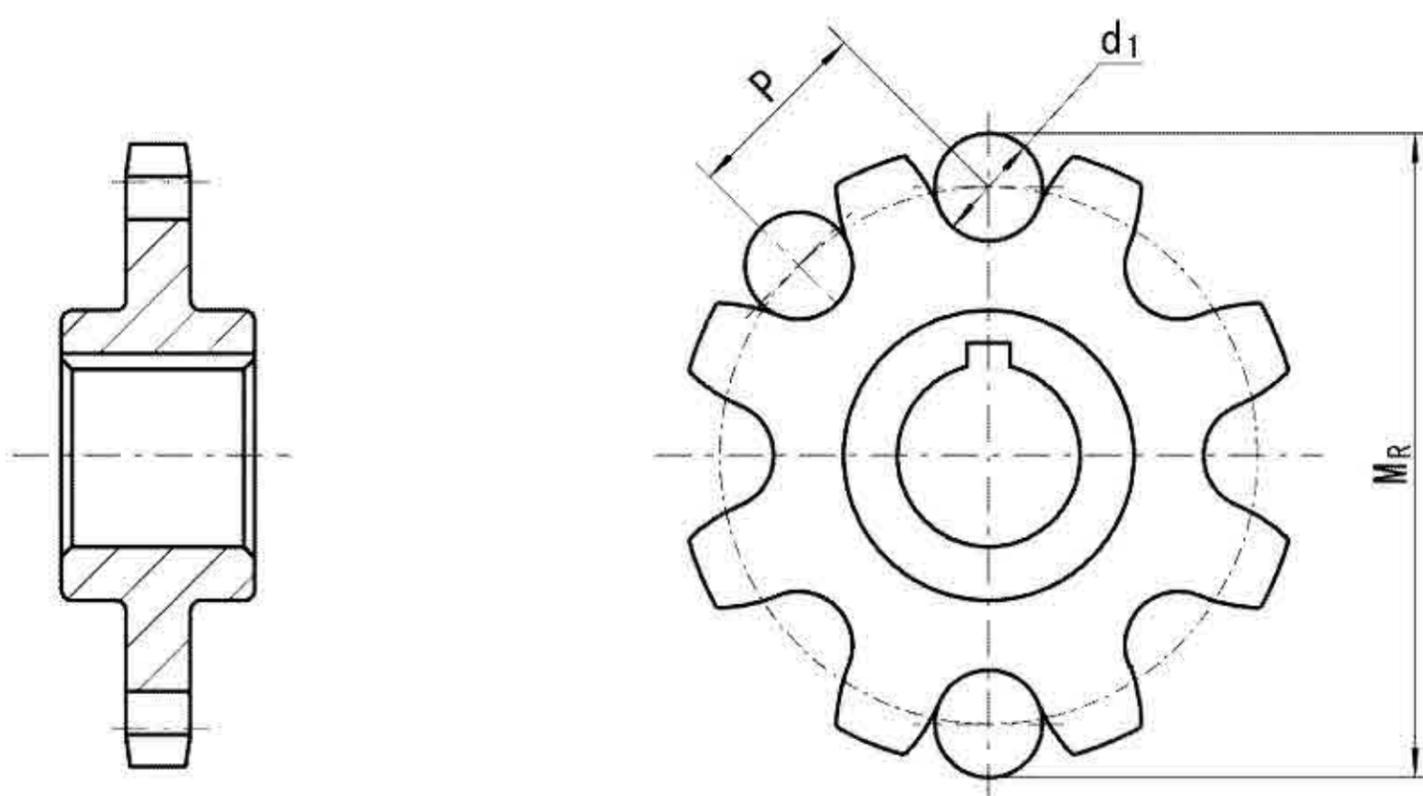


链号 Chain No.	节距 p mm	滚子外径 Roller diameter D(max) mm	链板高度 Height of Sidebar H(max) mm	窄端内宽 Inside width at anarrow end	
				b,公称值(Nominal Value) b,(min)=0.95b,mm	ANSI标准 ANSI Standard b 1(min) mm
2010	63.5	31.75	47.8	38.1	36.6
2512	77.9	41.28	60.5	39.6	38.1
2814	88.9	44.45	60.5	38.1	36.6
3315	103.45	45.24	63.5	49.3	47.2
3618	114.3	57.15	79.2	52.3	50.3
4020	127	63.5	91.9	69.9	67.1
4824	152.4	76.2	104.6	76.2	73.2
5628	177.8	88.9	133.4	82.6	79.2

链轮产品
Sprockets Products

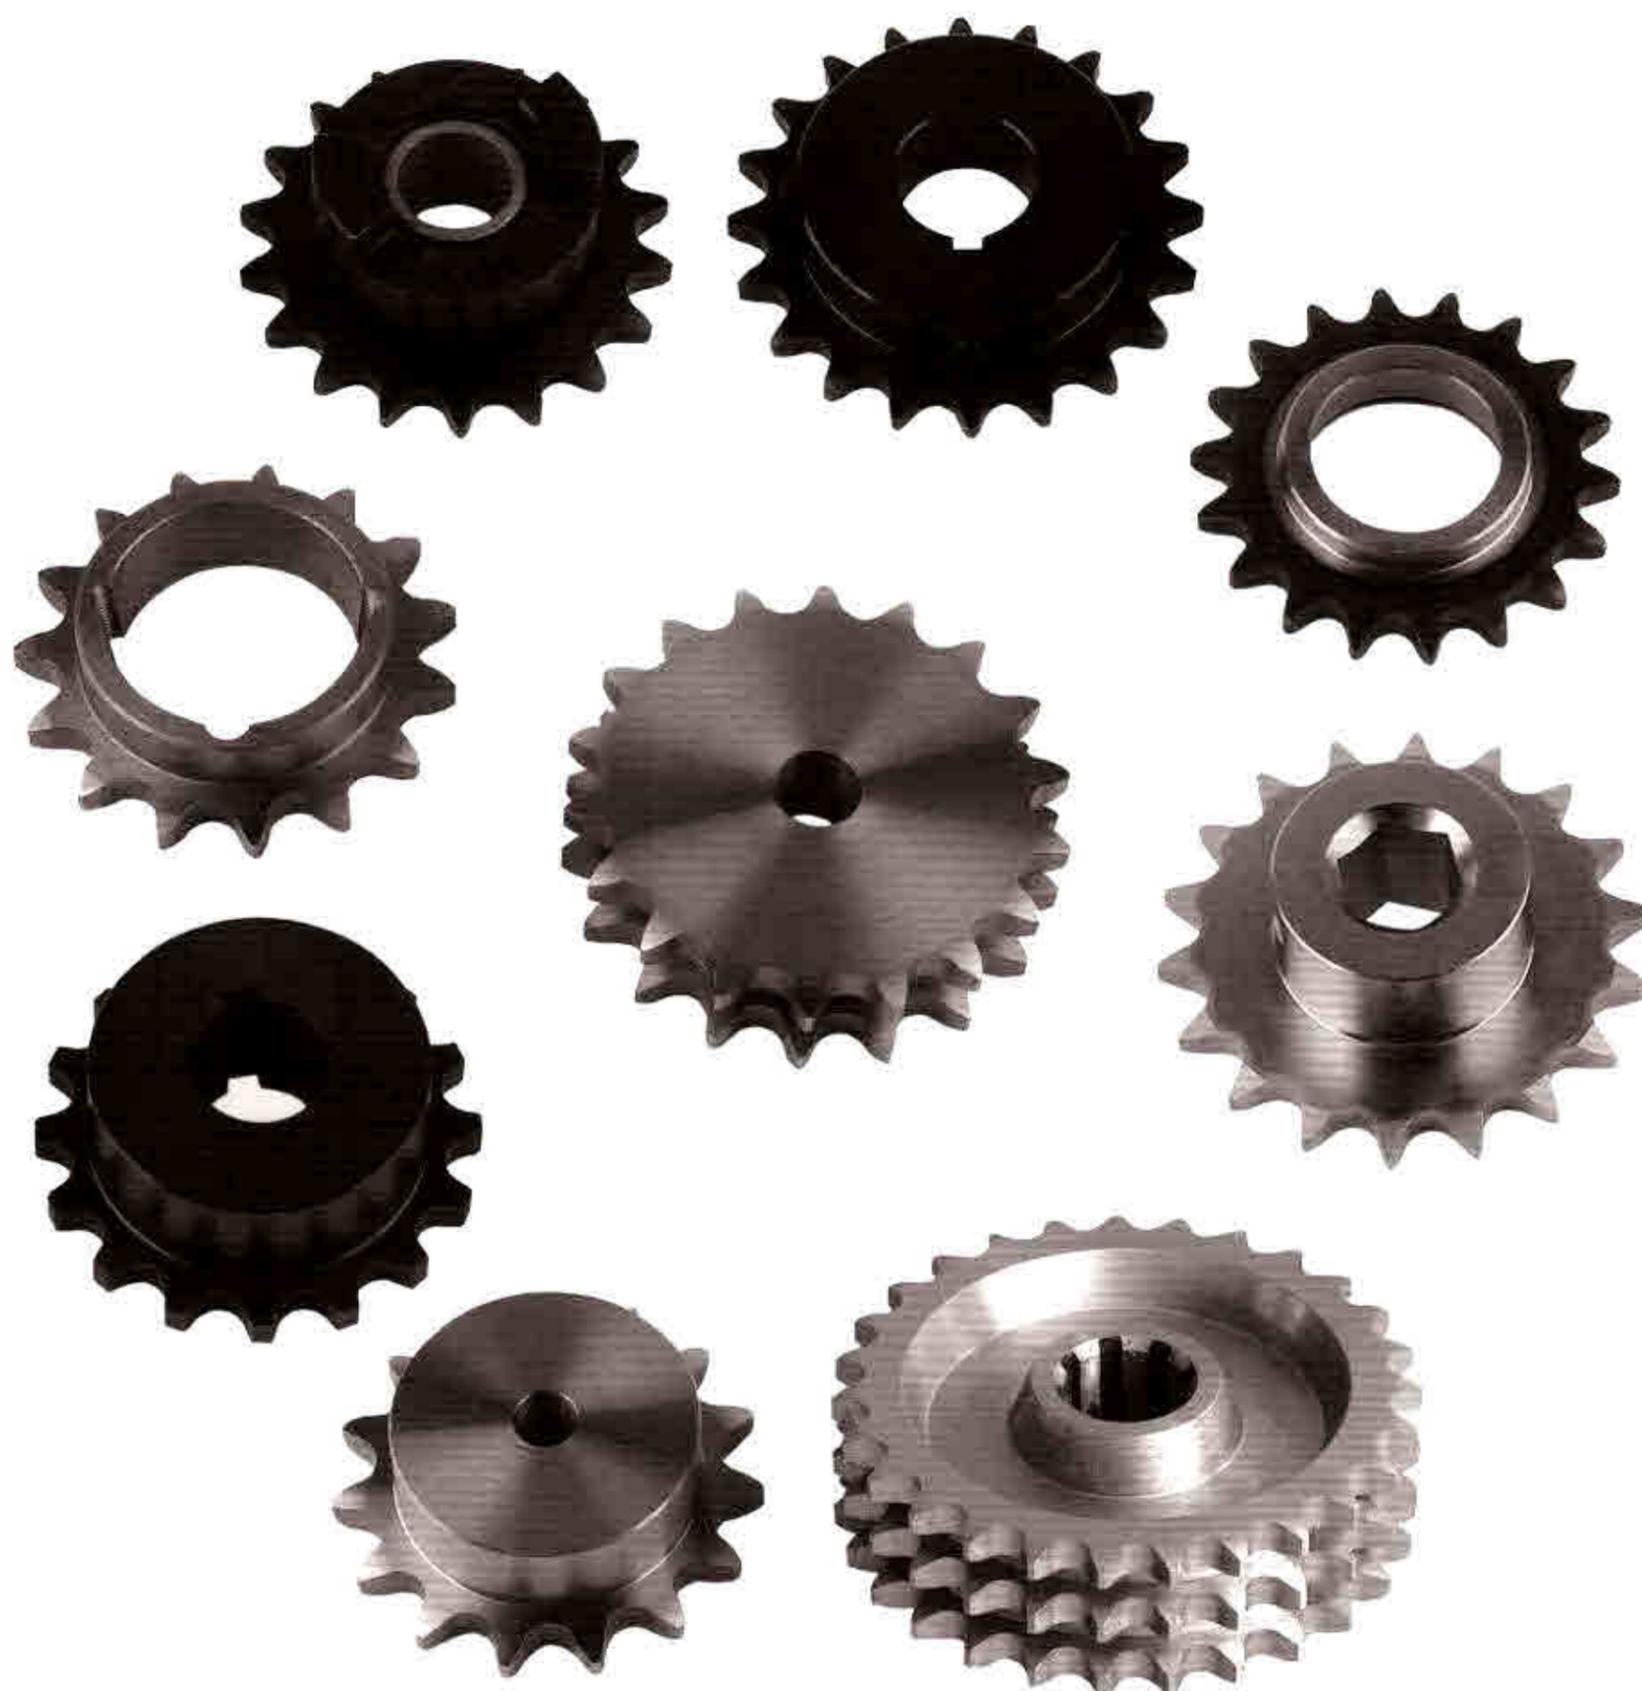

64

链轮产品
Sprockets Products

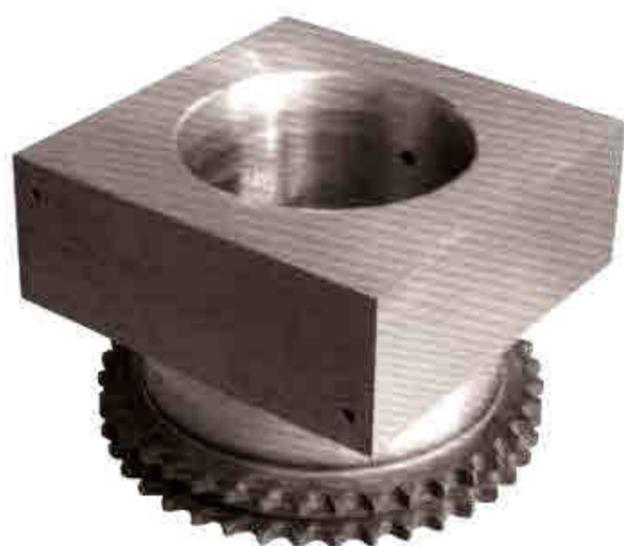

链轮产品
Sprockets Products



A型 (无轮毂)



B型 (单面有轮毂)



C型 (双面有轮毂)



单排链轮



双排链轮



三排链轮



锥套安装式



轴承式张紧轮



两条单排链同时
驱动式 (双驱动)

66