




C 输送链 CONVEYOR CHAIN

59	A系列直板滚子链	59	Roller chain with straight side plates (A series)
60	B系列直板滚子链	60	Roller chain with straight side plates (B series)
61/66	短节距输送链附件	61/66	Short pitch conveyor chain attachments
67	短节距加长销输送链	67	Short pitch conveyor chain with extended pins
68	双节距输送链	68	Double pitch conveyor chain
69/72	双节距输送链附件	69/72	Double pitch conveyor chain attachments
73	双节距输送链特殊附件	73	Double pitch conveyor chain special attachments
64/76	双节距加长销输送链	64/76	Double pitch conveyor chain with extended pins
77	倍速链	77	Double plus chain
78	带大滚轮输送链	78	Conveyor chain with large rollers
79/80	木材输送链及附件	79/80	Lumber conveyor chain & attachments
81/89	尖齿链	81/89	Sharp top chain
90	橡胶链	90	Roller chain with vulcanised elastomer profiles
91	带顶滚轮短节距输送链	91	Short pitch conveyor chain with top rollers
92	带顶滚轮双节距输送链	92	Short pitch conveyor chain with top rollers
93	带塑料附板滚子链	93	Roller chain with plastic attachments
94/95	M系列输送链	94/95	Conveyor chain (M series)
96/97	M系列带附板输送链	96/97	Conveyor chain with attachments (M series)
98/99	FV系列输送链	98/99	Conveyor chain (FV series)
100/101	FV系列带附板输送链	100/101	Conveyor chain with attachments (FV series)
102	MT系列输送链	102	Conveyor chain (MT series)
103	FVT系列输送链	103	Conveyor chain (FVT series)
104	MC系列空心销轴输送链	104	Hollow pin conveyor chain (MC series)
105	FVC系列空心销轴输送链	105	Hollow pin conveyor chain (FVC series)
106	ZC系列空心销轴输送链	106	Hollow pin conveyor chain (ZC series)
107/112	空心销轴链	107/112	Hollow pin chain
113	工程用钢制套筒链	113	Engineering steel bush chain
114	焊接弯板链	114	Welded type cranked link chain
115	钢制销合链	115	Steel pintle chain
116/117	刮板输送链	116/117	Scraper conveyor chain
118	摊铺机用输送链	118	Conveyor chain for crawler asphalt paver
119	筑路机械链	119	Conveyor chain for road construction machinery
120/121	烟草机械输送链	120/121	Tobacco conveyor chain
122	污水处理链	122	Sewage disposal chain
123	网带炉提升机链	123	Mesh belt furnace hoisting chain
124/127	糖机链	124/127	Sugar mill chain
128/129	棕油链	128/129	Palm oil chain
130	模锻可拆链	130	Drop forged rivetless chain

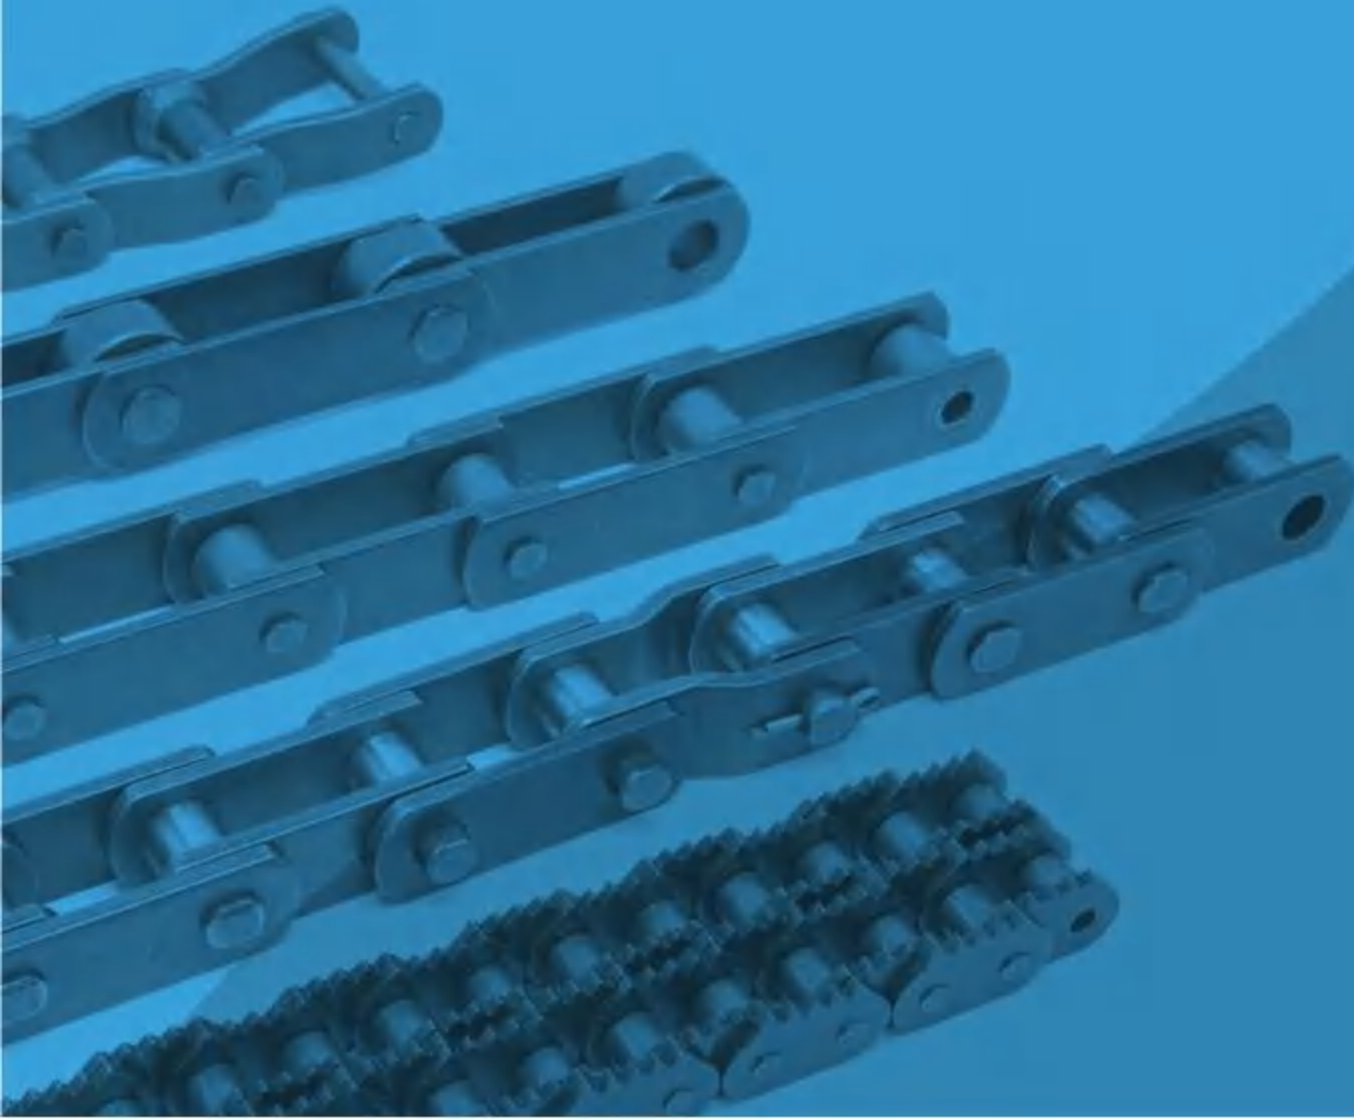

A系列直板滚子链



Roller chain with straight side plates (A series)

A系列直板滚子链 Roller chain with straight side plates (A series)

链号		节距	滚子直径	内节内宽	销轴直径	销轴长度		内链板高度	链板厚度	排距	极限拉伸载荷	平均拉伸载荷	每米长重
		Pitch	Roller diameter	Width between inner plates	Pin diameter	Pin length		Inner plate depth	Plate thickness	Transverse pitch	Ultimate tensile strength	Average tensile strength	Weight per meter
Chain No.		P	d ₁ max	b ₁ min	d ₂ max	L max	L _c max	h ₂ max	T max	P _t	Q min	Q ₀	q
		mm	mm	mm	mm	mm	mm	mm	mm	mm	kN/lbf	kN	kg/m
	*C35-1	9.525	5.08	4.77	3.58	13.3	14.3	9.00	1.30	-	7.9/1795	10.8	0.41
C08A-1	C40-1	12.700	7.95	7.85	3.96	16.6	18.8	12.00	1.50	-	14.1/3273	17.5	0.73
C10A-1	C50-1	15.875	10.16	9.40	5.08	20.7	23.3	15.09	2.03	-	22.2/5045	29.4	1.23
C12A-1	C60-1	19.050	11.91	12.57	5.94	25.9	28.3	18.0/18.2	2.42	-	31.8/7227	41.5	1.81/1.83
C16A-1	C80-1	25.400	15.88	15.75	7.92	32.7	36.5	24.00	3.25	-	56.7/12886	69.4	3.09
C20A-1	C100-1	31.750	19.05	18.90	9.53	40.4	44.7	30.00	4.00	-	88.5/20114	109.2	4.56
C24A-1	C120-1	38.100	22.23	25.22	11.10	50.3	54.3	35.70	4.80	-	127.0/28864	156.3	6.86
C28A-1	C140-1	44.450	25.40	25.22	12.70	54.4	59.0	41.00	5.60	-	172.4/39182	212.0	8.49
C32A-1	C160-1	50.800	28.58	31.55	14.27	64.8	69.6	47.80	6.40	-	226.8/51545	278.9	11.50
C08A-2	C40-2	12.700	7.95	7.85	3.96	31.0	33.2	12.00	1.50	14.38	28.2/6409	35.9	1.43
C10A-2	C50-2	15.875	10.16	9.40	5.08	38.9	41.4	15.09	2.03	18.11	44.4/10091	58.1	2.42
C12A-2	C60-2	19.050	11.91	12.57	5.94	48.8	51.1	18.0/18.2	2.42	22.78	63.6/14455	82.1	3.58/3.62
C16A-2	C80-2	25.400	15.88	15.75	7.92	62.7	65.8	24.00	3.25	29.29	113.4/25773	141.8	6.12
C20A-2	C100-2	31.750	19.05	18.90	9.53	76.4	80.5	30.00	4.00	35.76	177.0/40227	219.4	9.08
C24A-2	C120-2	38.100	22.23	25.22	11.10	95.8	99.7	35.70	4.80	45.44	254.0/57727	314.9	13.60
C28A-2	C140-2	44.450	25.40	25.22	12.70	103.3	107.9	41.00	5.60	48.87	344.8/78364	427.5	16.86
C32A-2	C160-2	50.800	28.58	31.55	14.27	123.3	128.1	47.80	6.40	58.55	453.6/103091	562.4	22.90
C08A-3	C40-3	12.700	7.95	7.85	3.96	45.4	47.6	12.00	1.50	14.38	42.3/9614	50.0	2.14
C10A-3	C50-3	15.875	10.16	9.40	5.08	57.0	59.5	15.09	2.03	18.11	66.6/15136	77.8	3.62
C12A-3	C60-3	19.050	11.91	12.57	5.94	71.5	73.9	18.0/18.2	2.42	22.78	95.4/21682	111.1	5.36/5.41
C16A-3	C80-3	25.400	15.88	15.75	7.92	91.7	95.1	24.00	3.25	29.29	170.1/38659	198.4	9.10
C20A-3	C100-3	31.750	19.05	18.90	9.53	112.2	116.3	30.00	4.00	35.76	265.5/60341	309.6	13.60
C24A-3	C120-3	38.100	22.23	25.22	11.10	141.4	145.2	35.70	4.80	45.44	381.0/86591	437.2	20.43
C28A-3	C140-3	44.450	25.40	25.22	12.70	152.2	156.8	41.00	5.60	48.87	517.2/117545	593.3	25.23
C32A-3	C160-3	50.800	28.58	31.55	14.27	181.8	186.6	47.80	6.40	58.55	680.4/154636	780.6	34.19

■*套筒链：表中滚子直径d₁为套筒直径

■*Bush chain: d₁ in the table indicates the external diameter of the bush

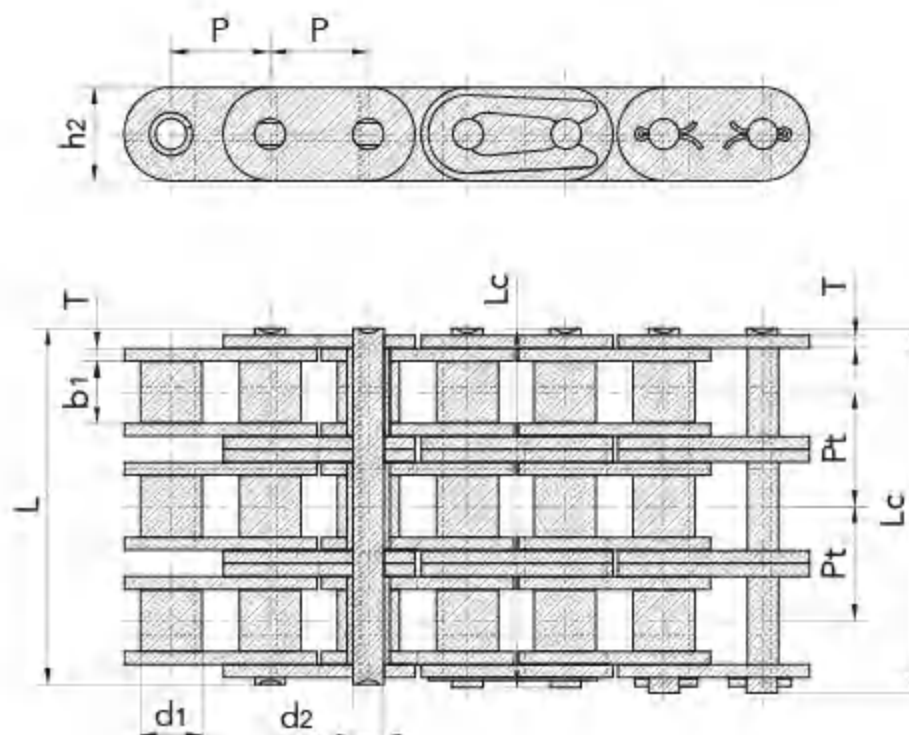
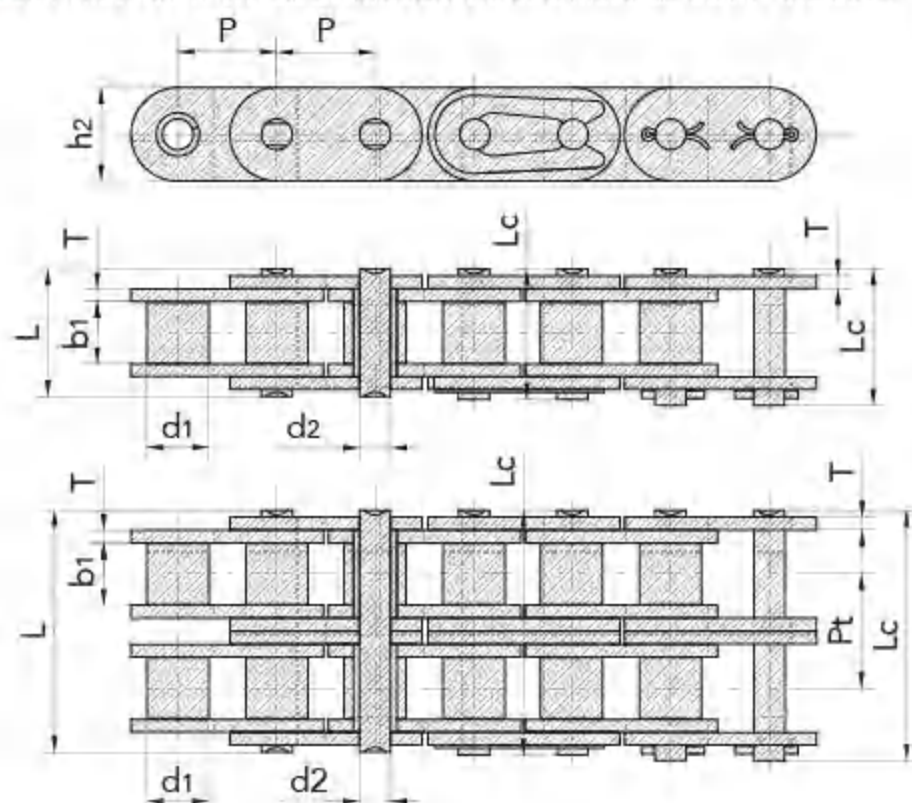


B系列直板滚子链

Roller chain with straight side plates (B series)

B系列直板滚子链 Roller chain with straight side plates (B series)

链号	节距	滚子直径	内节内宽	销轴直径	销轴长度		内链板高度	链板厚度	排距	极限拉伸载荷	平均拉伸载荷	每米长重
Chain No.	P	d ₁ max	b ₁ min	d ₂ max	L max	L _c max	h ₂ max	T max	P _t	Q _{min}	Q ₀	q
	mm	mm	mm	mm	mm	mm	mm	mm	mm	kN/lbf	kN	kg/m
C08B-1	12.700	8.51	7.75	4.45	16.7	18.2	11.8	1.60	-	18.0/4091	19.5	0.80
C10B-1	15.875	10.16	9.65	5.08	19.5	20.9	14.7	1.70	-	22.4/5091	27.9	1.06
C12B-1	19.050	12.07	11.68	5.72	22.5	25.2	16.0	1.85	-	29.0/6591	32.2	1.32
C16B-1	25.400	15.88	17.02	8.28	36.1	39.1	21.0/24.0	4.15/3.1	-	60.0/13636	72.8	3.08/3.49
C20B-1	31.750	19.05	19.56	10.19	41.3	45.0	26.4	4.5/3.5	-	95.0/21591	106.7	4.16
C24B-1	38.100	25.40	25.40	14.63	53.4	57.8	33.2	6.0/4.8	-	160.0/36364	178.0	7.47
C28B-1	44.450	27.94	30.99	15.90	65.1	69.5	36.7	7.5/6.0	-	200.0/45455	222.0	9.90
C32B-1	50.800	29.21	30.99	17.81	66.0	71.0	42.0	7.0/6.0	-	250.0/56818	277.5	10.45
C08B-2	12.700	8.51	7.75	4.45	31.2	32.2	11.8	1.60	13.92	32.0/7273	38.7	1.45
C10B-2	15.875	10.16	9.65	5.08	36.1	37.5	14.7	1.70	16.59	44.5/10114	57.8	2.00
C12B-2	19.050	12.07	11.68	5.72	42.0	44.7	16.0	1.85	19.46	57.8/13136	66.1	2.62
C16B-2	25.400	15.88	17.02	8.28	68.0	71.0	21.0/24.0	4.15/3.1	31.88	106.0/24091	133.0	6.10/6.92
C20B-2	31.750	19.05	19.56	10.19	77.8	81.5	26.4	4.5/3.5	36.45	170.0/38636	211.2	8.23
C24B-2	38.100	25.40	25.40	14.63	101.7	106.2	33.2	6.0/4.8	48.36	280.0/63636	319.2	14.77
C28B-2	44.450	27.94	30.99	15.90	124.6	129.1	36.7	7.5/6.0	59.56	360.0/81818	406.8	19.82
C32B-2	50.800	29.21	30.99	17.81	124.6	129.6	42.0	7.0/6.0	58.55	450.0/102273	508.5	20.94
C08B-3	12.700	8.51	7.75	4.45	45.1	46.1	11.8	1.60	13.92	47.5/10795	57.8	2.10
C10B-3	15.875	10.16	9.65	5.08	52.7	54.1	14.7	1.70	16.59	66.7/15159	84.5	2.87
C12B-3	19.050	12.07	11.68	5.72	61.5	64.2	16.0	1.85	19.46	86.7/19705	101.8	3.89
C16B-3	25.400	15.88	17.02	8.28	99.8	102.9	21.0/24.0	4.15/3.1	31.88	160.0/36364	203.7	9.12/10.34
C20B-3	31.750	19.05	19.56	10.19	114.2	117.9	26.4	4.5/3.5	36.45	250.0/56818	290.0	11.34
C24B-3	38.100	25.40	25.40	14.63	150.1	154.6	33.2	6.0/4.8	48.36	425.0/96591	493.0	22.10
C28B-3	44.450	27.94	30.99	15.90	184.2	188.7	36.7	7.5/6.0	59.56	530.0/120454	609.5	29.64
C32B-3	50.800	29.21	30.99	17.81	183.2	188.2	42.0	7.0/6.0	58.55	670.0/152273	770.5	31.27

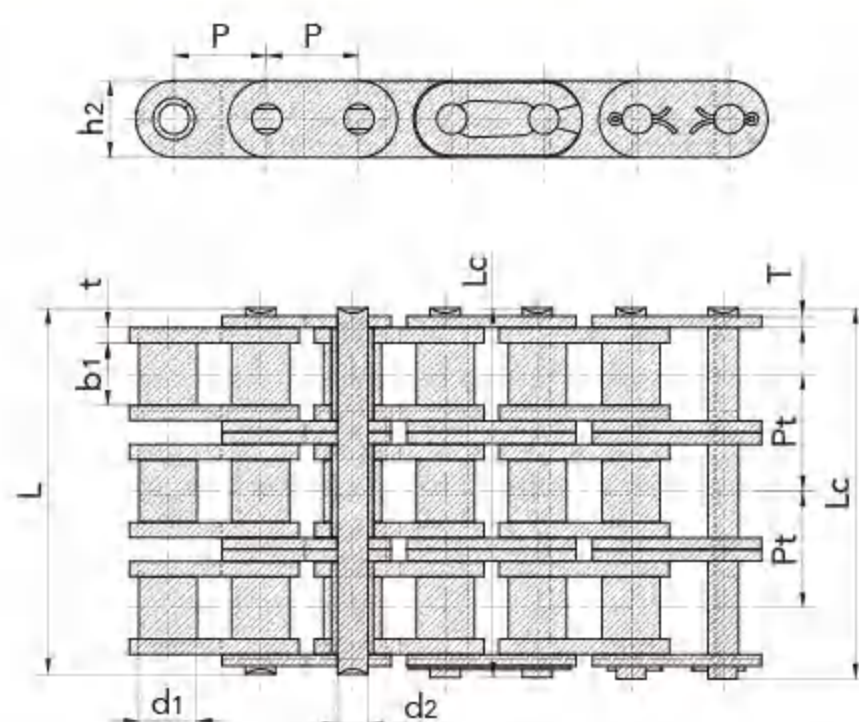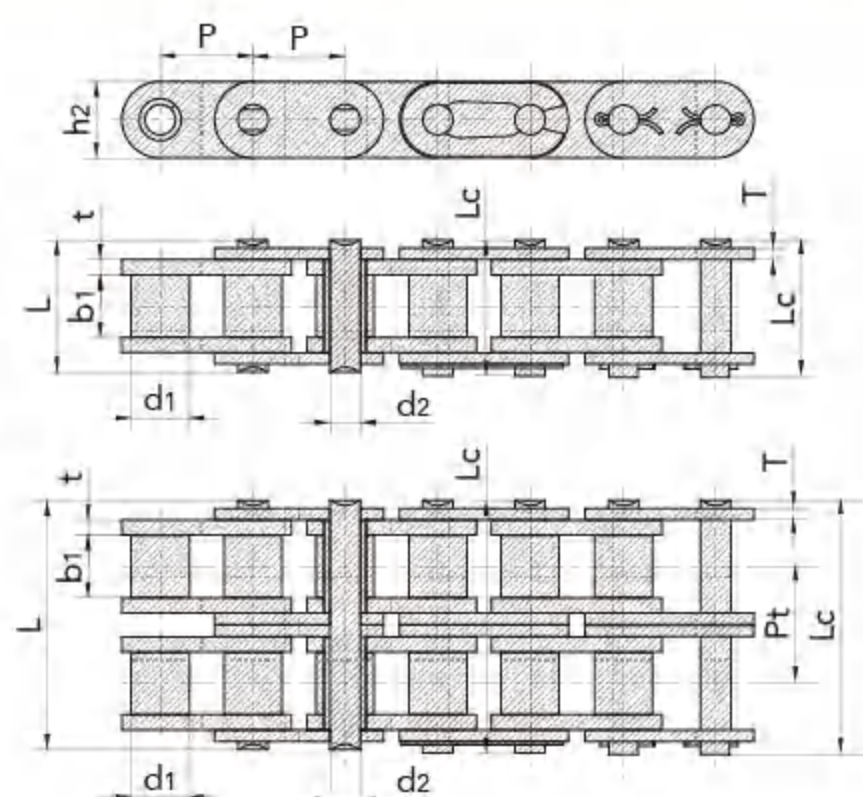

短节距输送链附件

Short pitch conveyor chain attachments


短节距输送链附件 Short pitch conveyor chain attachments

链号 DIN/ISO	链号 ANSI	P	G	F	W	T	h4	d4
DIN/ISO Chain No.	ANSI Chain No.	mm	mm	mm	mm	mm	mm	mm
04C	25	6.350	5.6	13.80	23.2	0.80	4.30	3.4
06C	35	9.525	7.9	19.00	28.6	1.30	6.35	3.4
08A	40	12.700	9.5	25.40	35.2	1.50	7.90	3.4
085	41	12.700	9.5	24.00	33.4	1.30	6.90	3.6
10A	50	15.875	12.7	31.75	46.2	2.03	10.30	5.5
12A	60	19.050	15.9	38.10	55.6	2.42	11.90	5.5
16A	80	25.400	19.1	50.80	64.8	3.25	15.90	6.8
20A	100	31.750	25.4	63.50	89.8	4.00	19.80	9.2
24A	120	38.100	28.6	76.20	108.5	4.80	23.00	9.8
28A	140	44.450	34.9	88.90	123.0	5.60	28.60	11.4
32A	160	50.800	38.1	101.60	142.8	6.40	31.75	13.1
40A	200	63.500	50.8	127.00	179.0	8.00	42.88	16.3
*06B		9.525	8.0	19.04	27.0	1.30	6.50	3.5
08B		12.700	9.5	25.40	36.4	1.60	8.90	4.5
10B		15.875	14.3	31.75	44.6	1.70	10.31	5.3
12B		19.050	16.0	38.10	52.4	1.85	13.46	6.4
16B		25.400	19.1	50.80	72.6	3.10	15.88	6.4
20B		31.750	35.0	63.50	100.5	3.50	19.80	9.0
24B		38.100	30.0	76.20	108.4	4.80	26.67	10.5
28B		44.450	35.0	88.90	123.0	6.00	28.58	13.1
32B		50.800	38.1	101.60	142.8	6.00	31.75	13.1


■*直链板

■*Straight side plates

A-1

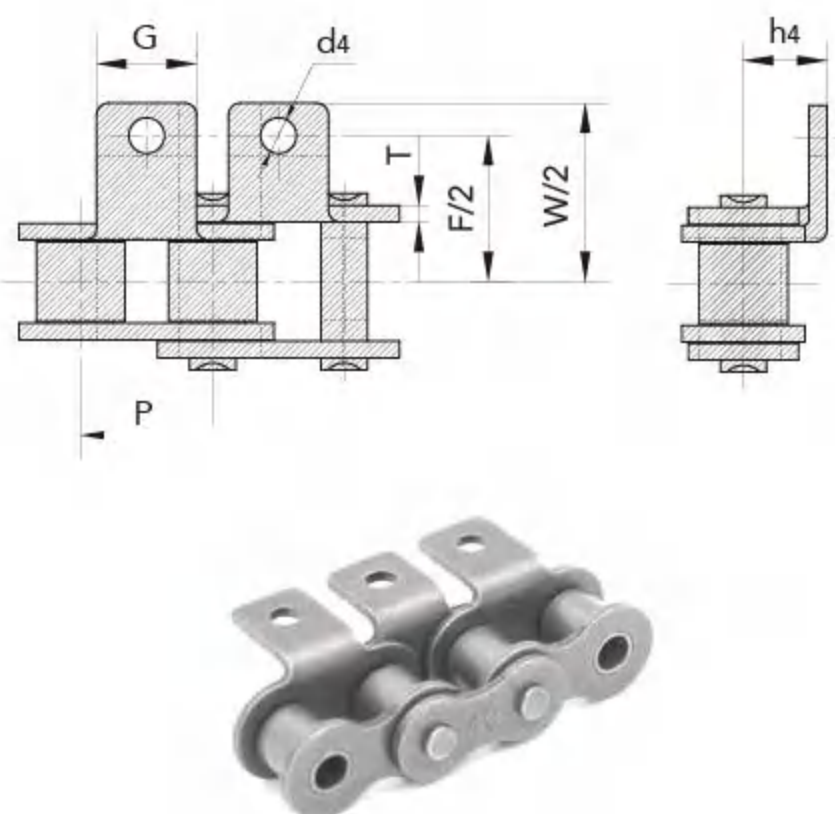

K-1

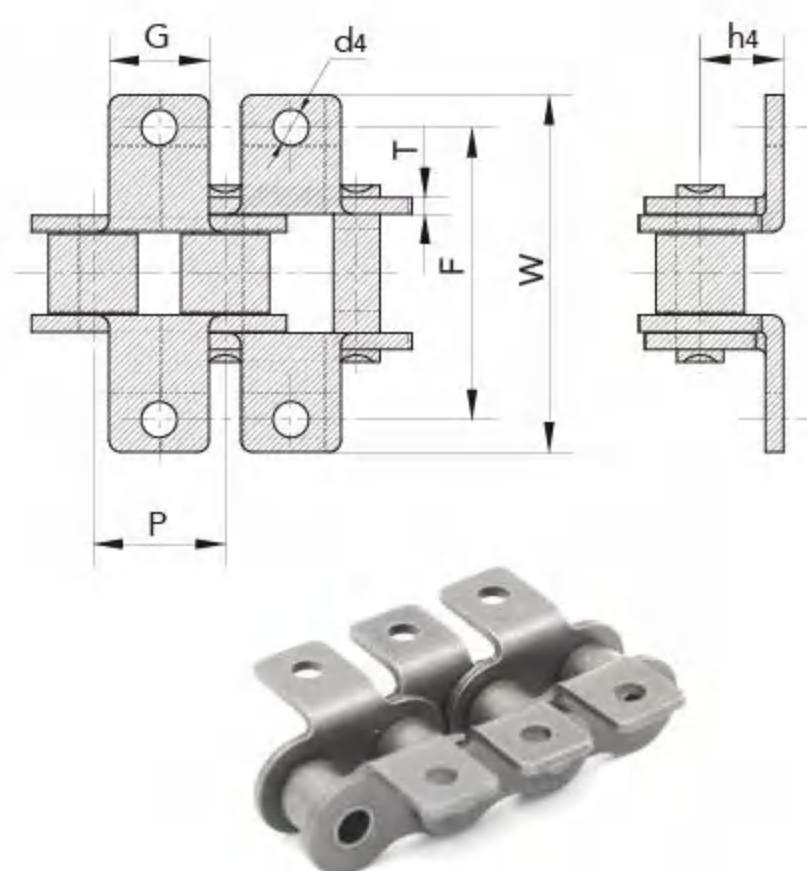

短节距输送链附件 Short pitch conveyor chain attachments


短节距输送链附件 Short pitch conveyor chain attachments

链号 DIN/ISO	链号 ANSI	P	G	C	F	T	d4
DIN/ISO Chain No.	ANSI Chain No.	mm	mm	mm	mm	mm	mm
04C	25	6.350	5.6	7.95	11.70	0.80	3.4
06C	35	9.525	7.9	9.50	14.55	1.30	3.4
08A	40	12.700	9.5	12.70	19.05	1.50	3.4
085	41	12.700	9.5	11.85	16.55	1.30	3.6
10A	50	15.875	12.7	15.90	25.25	2.03	5.5
12A	60	19.050	15.9	18.30	29.33	2.42	5.5
16A	80	25.400	19.1	24.60	34.70	3.25	6.8
20A	100	31.750	25.4	31.80	43.30	4.00	9.2
24A	120	38.100	28.6	36.50	51.60	4.80	9.8
28A	140	44.450	34.9	44.50	62.00	5.60	11.4
32A	160	50.800	38.1	50.80	69.85	6.40	13.1
40A	200	63.500	50.8	63.50	88.90	8.00	16.3
*06B		9.525	8.0	9.52	13.50	1.30	3.5
08B		12.700	9.5	13.35	18.90	1.60	4.3
10B		15.875	14.3	16.50	22.95	1.70	5.3
12B		19.050	16.0	21.45	28.60	1.85	6.4
16B		25.400	19.1	23.15	34.00	3.10	6.4
20B		31.750	35.0	30.50	45.70	3.50	9.0
24B		38.100	36.0	36.00	61.50	4.80	10.5


■*直链板

■*Straight side plates

SA-1/M1单侧(one side)

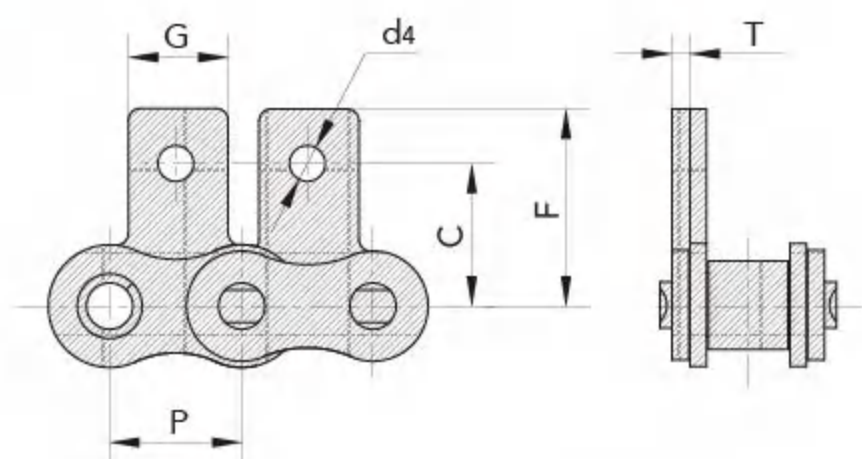

SK-1/M1双侧(both sides)

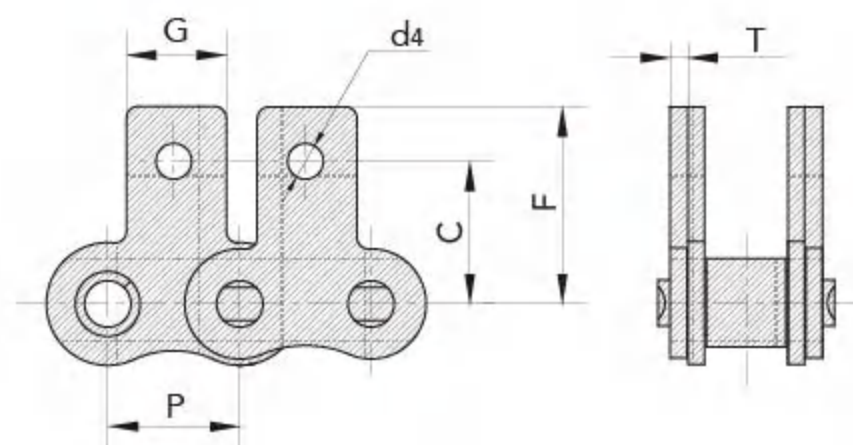

传动链
Driving Chain

曳引链
Hoisting Chain

输送链
Conveyor Chain

不锈钢链
Stainless Steel Chain

农机链
Agricultural Chain

短节距输送链附件

Short pitch conveyor chain attachments

短节距输送链附件 Short pitch conveyor chain attachments


链号 DIN/ISO	链号 ANSI	P	G	L	F	W	T	h4	d4
DIN/ISO Chain No.	ANSI Chain No.	mm	mm	mm	mm	mm	mm	mm	mm
04C	25	6.350	11.41	6.350	13.80	23.2	0.80	4.30	3.40
06C	35	9.525	17.32	9.525	19.00	28.6	1.30	6.35	2.80
08A	40	12.700	23.00	12.700	25.40	35.6	1.50	7.90	3.40
08S	41	12.700	22.30	12.700	24.00	35.0	1.30	7.20	4.85
10A	50	15.875	28.80	15.875	31.75	46.8	2.03	10.30	5.50
12A	60	19.050	34.65	19.050	38.10	56.4	2.42	11.90	5.50
16A	80	25.400	45.90	25.400	50.80	73.2	3.25	15.90	6.80
20A	100	31.750	57.65	31.750	63.50	89.8	4.00	19.80	9.20
24A	120	38.100	69.30	38.100	76.20	108.8	4.80	23.00	9.80
28A	140	44.450	80.45	44.450	88.90	123.0	5.60	28.60	11.40
32A	160	50.800	92.00	50.800	101.60	142.8	6.40	31.75	13.10
40A	200	63.500	115.50	63.500	127.00	179.0	8.00	42.88	16.30
*06B		9.525	17.72	9.525	19.04	27.0	1.30	6.50	3.50
08B		12.700	24.00	12.700	25.40	36.4	1.60	8.90	4.30
10B		15.875	29.58	15.875	31.80	44.6	1.70	10.31	5.30
12B		19.050	34.05	19.050	38.10	52.4	1.85	13.46	6.40
16B		25.400	46.40	25.400	50.80	72.6	3.10	15.88	6.40
20B		31.750	58.10	31.750	63.00	100.5	3.50	19.80	9.00
24B		38.100	71.30	38.100	76.20	108.4	4.80	26.67	10.50
28B		44.450	81.10	44.450	88.90	123.0	6.00	28.58	13.10
32B		50.800	92.80	50.800	101.60	142.8	6.00	31.75	13.10

■*直链板

■*Straight side plates


WA-1

WA-2

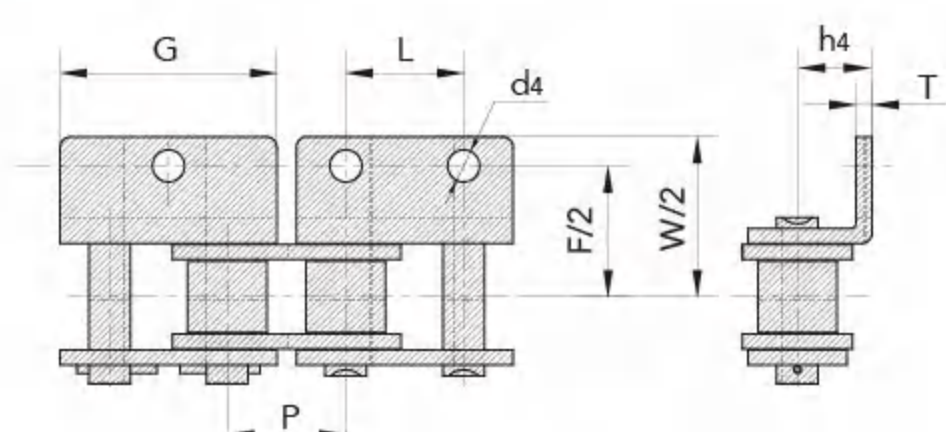

WK-1

WK-2

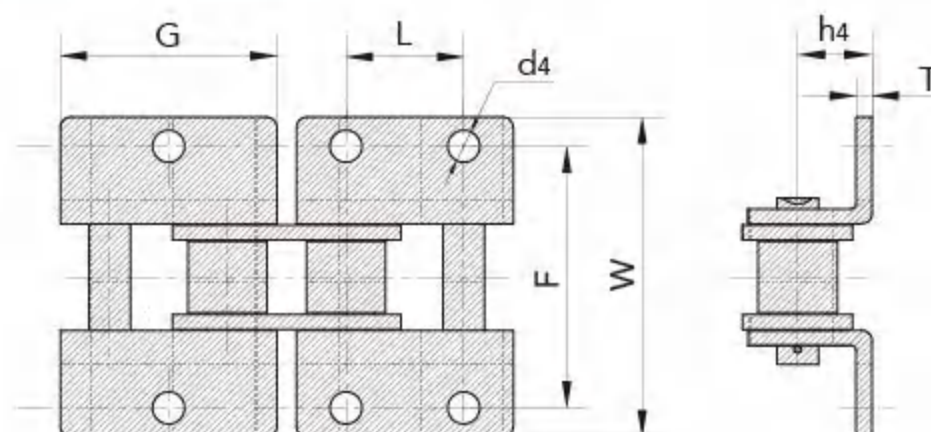

短节距输送链附件 Short pitch conveyor chain attachments

短节距输送链附件 Short pitch conveyor chain attachments

链号 DIN/ISO	链号 ANSI	P	G	L	C	F	T	d4
DIN/ISO Chain No.	ANSI Chain No.	mm	mm	mm	mm	mm	mm	mm
04C	25	6.350	11.41	6.350	7.95	11.70	0.80	3.4
06C	35	9.525	17.32	9.525	9.50	14.55	1.30	2.8
08A	40	12.700	23.00	12.700	12.70	17.40	1.50	3.4
085	41	12.700	21.20	12.700	11.85	16.55	1.30	3.6
10A	50	15.875	28.80	15.875	15.90	23.05	2.03	5.5
12A	60	19.050	34.65	19.050	18.30	26.86	2.42	5.5
16A	80	25.400	45.90	25.400	24.60	35.45	3.25	6.8
20A	100	31.750	57.65	31.750	31.80	44.00	4.00	9.2
24A	120	38.100	69.30	38.100	36.50	51.60	4.80	9.8
28A	140	44.450	80.45	44.450	44.50	62.00	5.60	11.4
32A	160	50.800	92.00	50.800	50.80	69.85	6.40	13.1
40A	200	63.500	115.5	63.500	63.50	88.90	8.00	16.3
*06B		9.525	17.72	9.525	9.52	13.50	1.30	3.5
08B		12.700	23.30	12.700	13.35	18.90	1.60	4.3
10B		15.875	29.58	15.875	16.50	22.95	1.70	5.3
12B		19.050	34.05	19.050	21.45	28.60	1.85	6.4
16B		25.400	46.40	25.400	23.15	34.00	3.10	6.4
20B		31.750	58.10	31.750	30.50	45.70	3.50	9.0
24B		38.100	71.30	38.100	42.70	61.50	4.80	10.5

■*直链板

■*Straight side plates


传动链
Driving Chain

曳引链
Hoisting Chain

输送链
Conveyor Chain


WSA-1

WSA-2

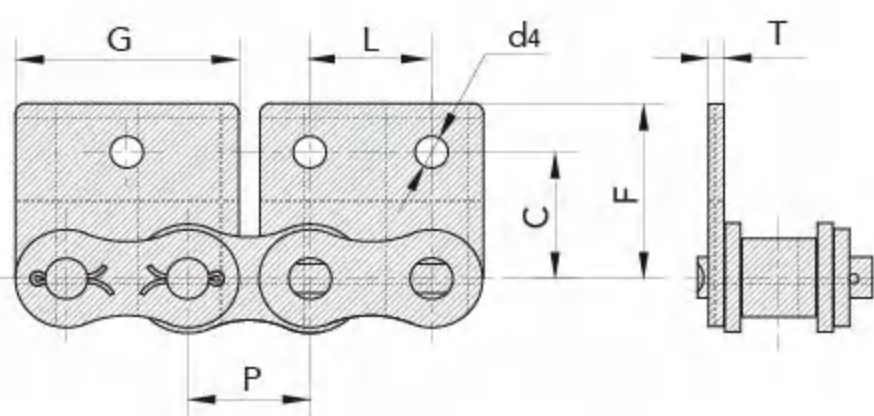

WSK-1

WSK-2

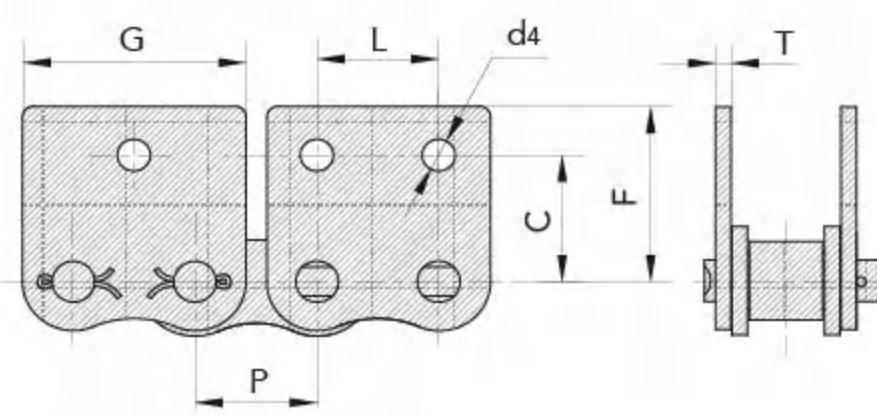

不锈钢链
Stainless Steel Chain

农机链
Agricultural Chain

短节距输送链附件 Short pitch conveyor chain attachments



短节距输送链附件 Short pitch conveyor chain attachments

链号 DIN/ISO	链号 ANSI	P	G	F	W	T	h4	d4
DIN/ISO Chain No.	ANSI Chain No.	mm	mm	mm	mm	mm	mm	mm
08A	40	12.700	9.5	25.40	35.2	1.50	7.90	3.4
10A	50	15.875	12.7	31.75	46.2	2.03	10.30	5.5
12A	60	19.050	15.9	38.10	55.6	2.42	11.90	5.5
16A	80	25.400	19.1	50.80	64.8	3.25	15.90	6.8
20A	100	31.750	25.4	63.50	87.3	4.00	19.80	9.2
24A	120	38.100	28.6	76.20	108.5	4.80	23.00	9.8
*06B		9.525	8.0	19.04	27.0	1.30	6.50	3.5
08B		12.700	9.5	25.40	36.4	1.60	8.90	4.5
10B		15.875	14.3	31.75	44.6	1.70	10.31	5.3
12B		19.050	16.0	38.10	52.4	1.85	13.46	6.4
16B		25.400	19.1	50.80	72.6	3.10	15.88	6.4
20B		31.750	35.0	63.50	100.5	3.50	19.80	9.0
24B		38.100	30.0	76.20	108.4	4.80	26.67	10.5



■*直链板

■*Straight side plates

AA-1

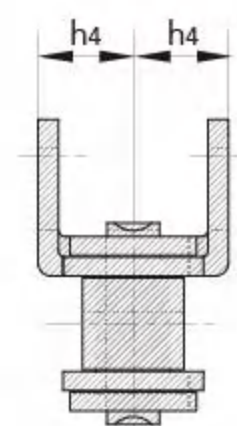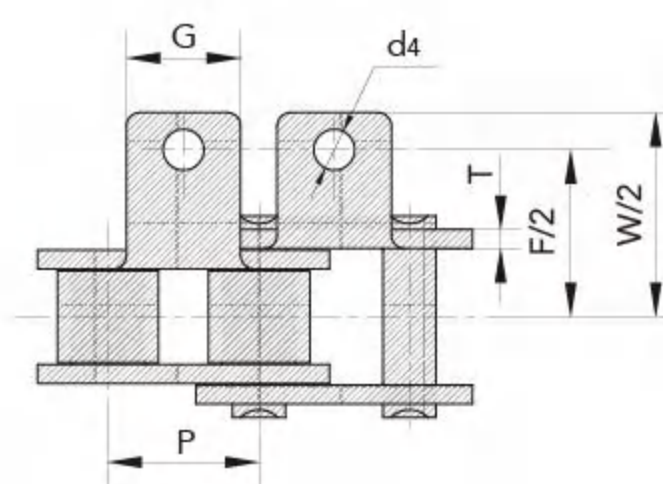

KK-1

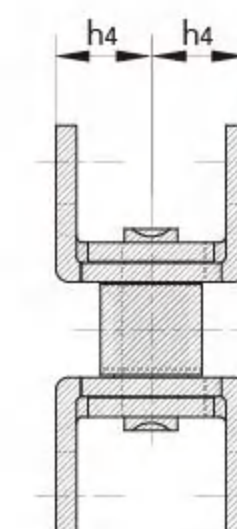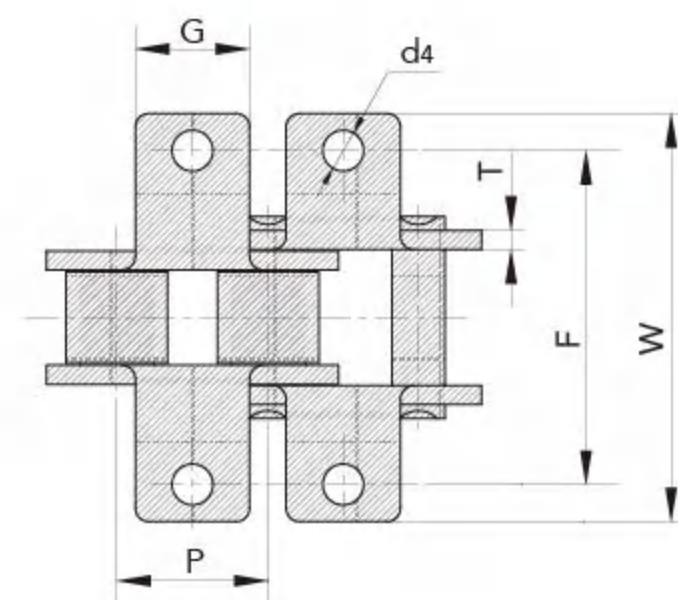

短节距输送链附件 Short pitch conveyor chain attachments



短节距输送链附件 Short pitch conveyor chain attachments

链号 DIN/ISO	链号 ANSI	P	G	C	F	T	d4
DIN/ISO Chain No.	ANSI Chain No.	mm	mm	mm	mm	mm	mm
08A	40	12.700	9.5	12.70	19.05	1.50	3.4
10A	50	15.875	12.7	15.90	25.25	2.03	5.5
12A	60	19.050	15.9	18.30	29.33	2.42	5.5
16A	80	25.400	19.1	24.60	34.70	3.25	6.8
20A	100	31.750	25.4	31.80	43.30	4.00	9.2
24A	120	38.100	28.6	73.00	103.20	4.80	9.8
*06B		9.525	8.0	9.52	13.50	1.30	3.5
08B		12.700	9.5	13.35	18.90	1.60	4.3
10B		15.875	14.3	16.50	22.95	1.70	5.3
12B		19.050	16.0	21.45	28.60	1.85	6.4
16B		25.400	19.1	23.15	34.00	3.10	6.4
20B		31.750	35.0	30.50	45.70	3.50	9.0
24B		38.100	36.0	85.40	123.0	4.80	10.5



■*直链板

■*Straight side plates

SAA-1

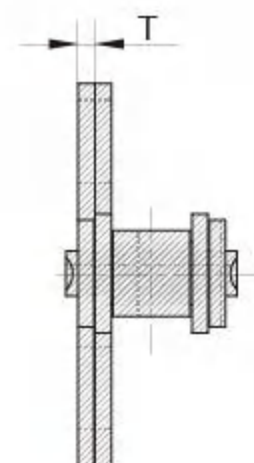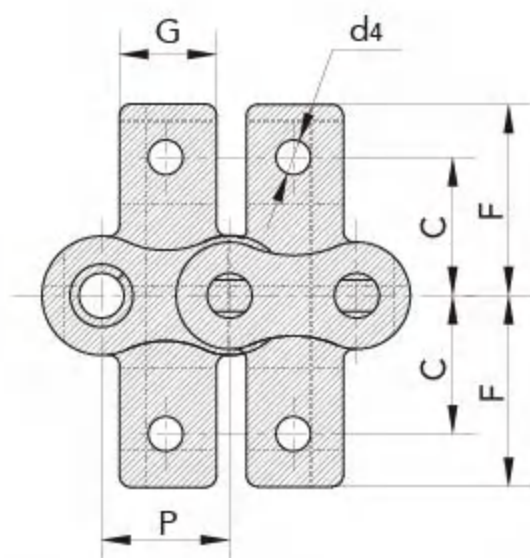

SKK-1

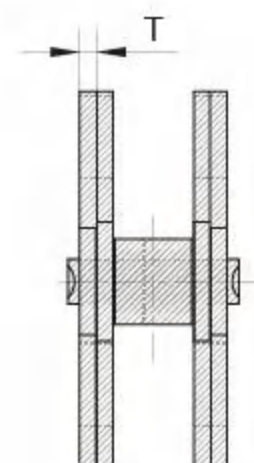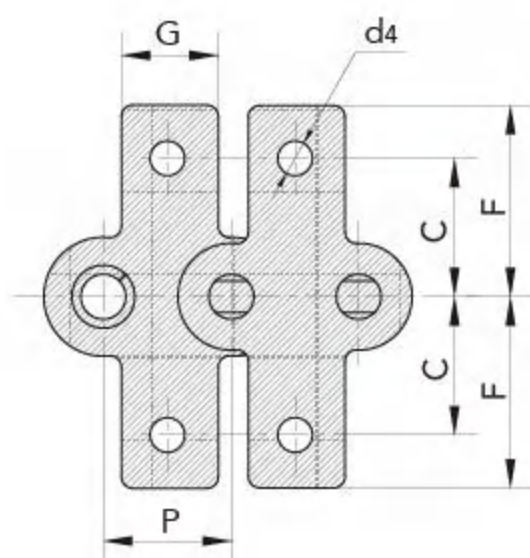

传动链
Driving Chain

曳引链
Hoisting Chain

输送链
Conveyor Chain

不锈钢链
Stainless Steel Chain



农机链
Agricultural Chain

短节距加长销输送链

Short pitch conveyor chain with extended pins

短节距加长销输送链 Short pitch conveyor chain with extended pins

链号 DIN/ISO	链号 ANSI	P	b ₁	d ₂	L ₃	L	L _c
DIN/ISO Chain No.	ANSI Chain No.	mm	mm	mm	mm	mm	mm
06C	35	9.525	4.77	3.58	9.5	20.8	21.6
08A	40	12.700	7.85	3.96	9.5	25.1	26.2
10A	50	15.875	9.40	5.08	11.9	31.3	33.1
12A	60	19.050	12.57	5.94	14.3	38.6	40.6
16A	80	25.400	15.75	7.92	19.1	50.3	53.3
20A	100	31.750	18.90	9.53	23.8	61.8	66.1
24A	120	38.100	25.22	11.10	28.6	76.4	80.4
28A	140	44.450	25.22	12.70	33.3	84.8	89.4
32A	160	50.800	31.55	14.27	38.1	99.6	104.4
08B		12.700	7.75	4.45	9.5	25.1	26.6
10B		15.875	9.65	5.08	11.9	30.1	31.5
12B		19.050	11.68	5.72	14.3	35.4	37.1
16B		25.400	17.02	8.28	19.1	53.0	54.3
20B		31.750	19.56	10.19	41.0	79.9	83.6
24B		38.100	25.40	14.63	50.7	101.4	105.8
28B		44.450	30.99	15.90	61.9	124.0	128.4
32B		50.800	30.99	17.81	64.8	126.8	131.8

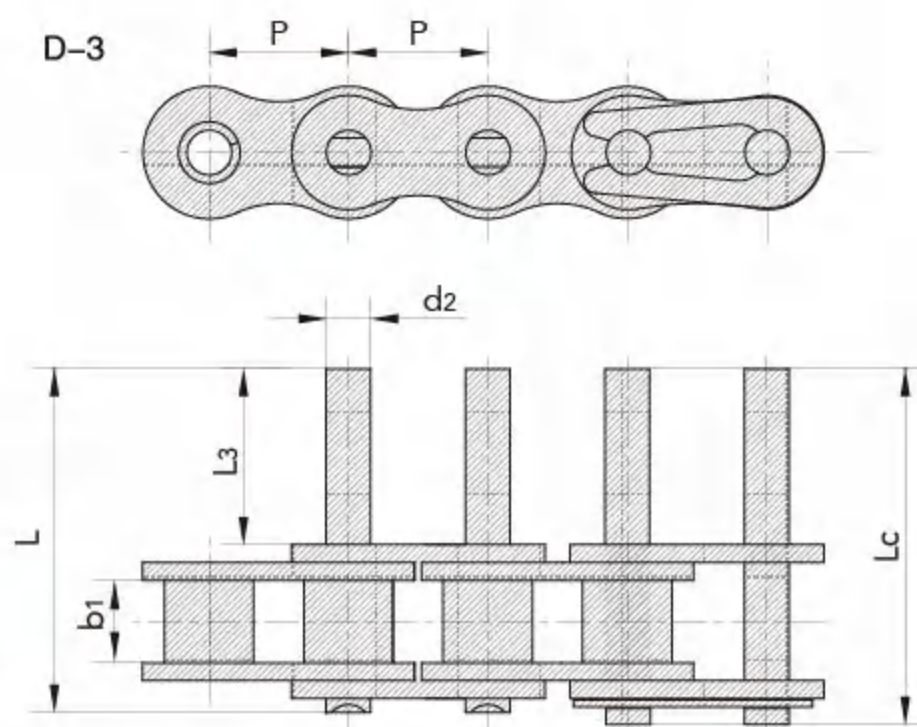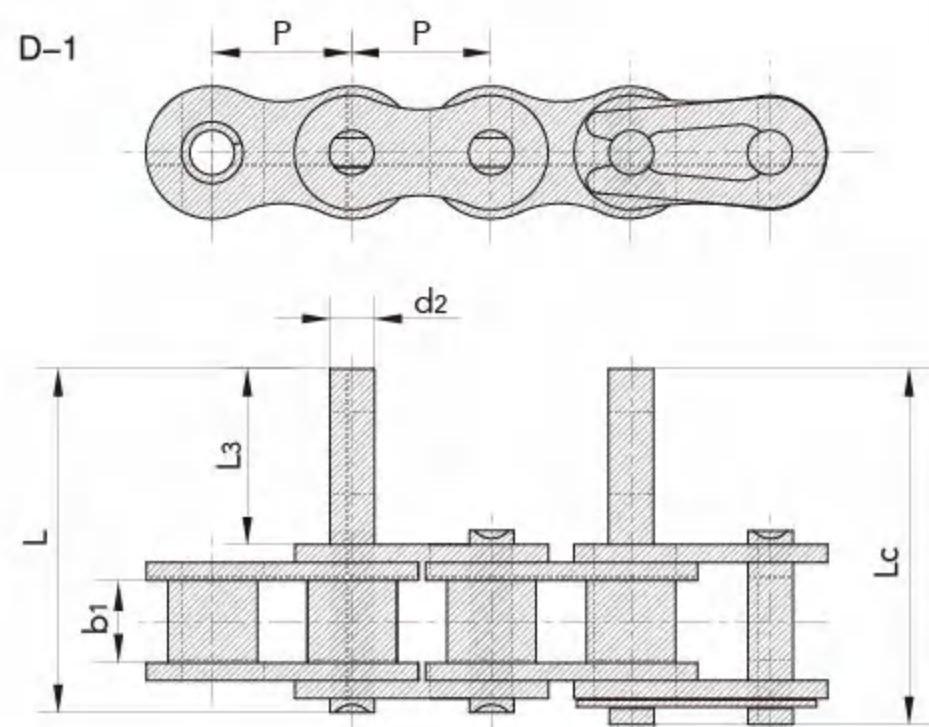


双节距输送链 Double pitch conveyor chain


双节距输送链 Double pitch conveyor chain

链号 ISO	链号 ANSI	节距 Pitch	滚子直径 Roller diameter	内节内宽 Width between inner plates	销轴直径 Pin diameter	销轴长度 Pin length		内链板高度 Innerplate depth	链板厚度 Plate thickness	极限拉伸载荷 Ultimate tensile strength	平均拉伸载荷 Average tensile strength	每米长重 Weight per meter
ISO Chain No.	ANSI Chain No.	P	d ₁ max	b ₁ min	d ₂ max	L max	L _c max	h ₂ max	T max	Q _{min}	Q ₀	q
		mm	mm	mm	mm	mm	mm	mm	mm	kN/lbf	kN	kg/m
C208A	C2040	25.40	7.95	7.85	3.96	16.6	17.8	12.0	1.50	14.1/3205	16.7	0.50
C208AL	C2042		15.88									0.84
C208AH	C2040H	25.40	7.95	7.85	3.96	18.8	19.9	12.0	2.03	14.1/3205	17.2	0.65
C208B		25.40	8.51	7.75	4.45	16.7	18.2	11.8	1.60	18.0/4091	19.4	0.55
C208BL			15.88									0.89
C210A	C2050	31.75	10.16	9.40	5.08	20.7	22.2	15.0	2.03	22.2/5045	28.1	0.78
C210AL	C2052		19.05									1.27
C212A	C2060	38.10	11.91	12.57	5.94	25.9	27.7	18.0	2.42	31.8/7227	36.8	1.12
C212AL	C2062		22.23									1.61
C212AH	C2060H	38.10	11.91	12.57	5.94	29.2	31.6	18.0	3.25	31.8/7227	41.6	1.44
C212AHL	C2062H		22.23									2.07
C216A	C2080	50.80	15.88	15.75	7.92	32.7	36.5	24.0	3.25	56.7/12886	65.7	2.08
C216AL	C2082		28.58									3.12
C216AH	C2080H	50.80	15.88	15.75	7.92	36.2	39.4	24.0	4.00	56.7/12886	70.0	2.54
C216AHL	C2082H		28.58									3.58
C220A	C2100	63.50	19.05	18.90	9.53	40.4	44.7	30.0	4.00	88.5/20114	102.6	3.01
C220AL	C2102		39.67									4.83
C220AH	C2100H	63.50	19.05	18.90	9.53	43.6	46.9	30.0	4.80	88.5/20114	112.4	3.56
C220AHL	C2102H		39.67									5.38
C224A	C2120	76.20	22.23	25.22	11.10	50.3	54.3	35.7	4.80	127.0/28864	147.3	4.66
C224AL	C2122		44.45									7.66
C224AH	C2120H	76.20	22.23	25.22	11.10	53.5	57.5	35.7	5.60	127.0/28864	160.9	5.26
C224AHL	C2122H		44.45									8.26
C232A	C2160	101.60	28.58	31.75	14.27	64.8	69.6	47.8	6.40	226.8/51545	278.9	8.15
C232AL	C2162		57.15									13.00
C232AH	C2160H	101.60	28.58	31.75	14.27	68.2	73.0	47.8	7.20	226.8/51545	285.8	9.06
C232AHL	C2162H		57.15									13.84

小滚子型
Small Roller Type

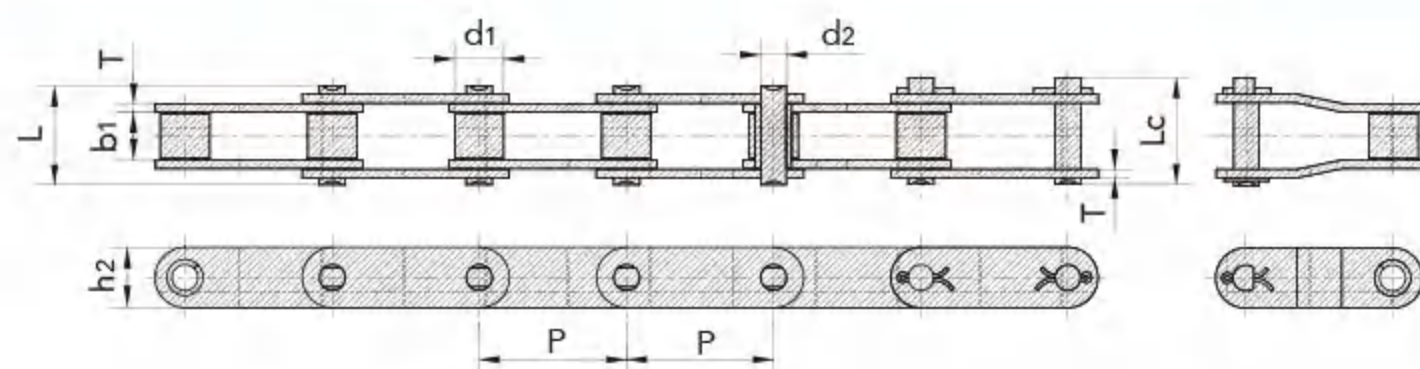

大滚子型
Large Roller Type

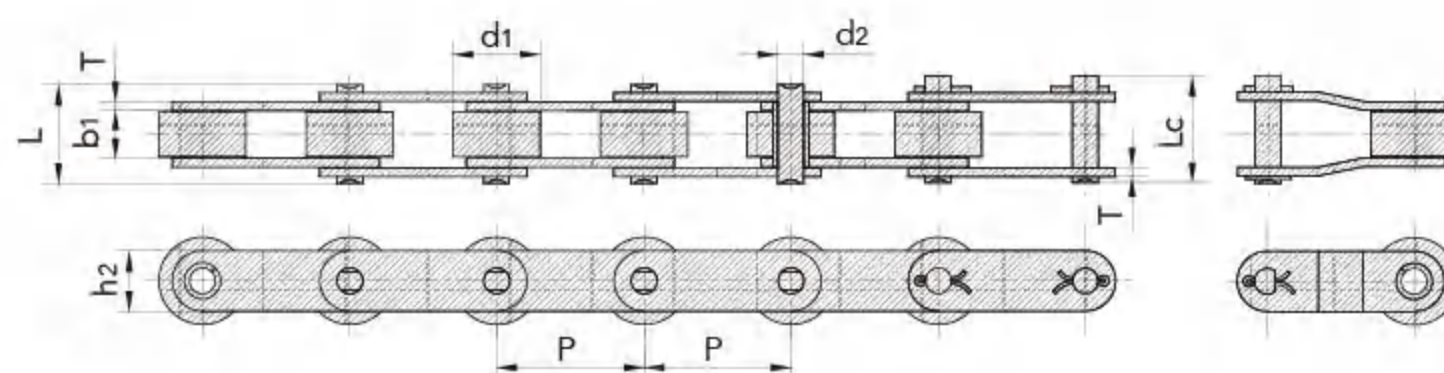


双节距输送链附件

Double pitch conveyor chain attachments




双节距输送链附件 Double pitch conveyor chain attachments

链号 DIN/ISO	链号 ANSI	P	G	F1	W	h4	d4	C	F2	d5
DIN/ISO Chain No.	ANSI Chain No.	mm	mm	mm	mm	mm	mm	mm	mm	mm
208A	2040	25.40	19.1	25.4	39.6	9.1	3.4	11.1	20.5	5.5
210A	2050	31.75	23.8	31.8	49.0	11.1	5.5	14.3	25.0	6.6
212A	2060	38.10	28.6	42.9	67.8	14.7	5.5	17.5	32.9	9.2
216A	2080	50.80	38.1	55.6	87.8	19.1	6.8	22.2	43.5	11.0
220A	2100	63.50	47.6	66.6	107.5	23.4	9.2	28.6	50.4	13.0
224A	2120	76.20	57.2	79.3	121.4	27.8	10.5	33.3	55.5	15.0
208B		25.40	23.2	25.4	39.6	9.1	4.5	11.1	20.5	5.5
210B		31.75	23.8	31.8	49.0	11.1	5.5			
212B		38.10	35.0	38.1	57.0	14.7	6.6			
216B		50.80	44.0	50.8	84.0	19.1	6.6			
220B		63.50	52.0	63.5	104.0	23.4	8.4			
224B		76.20	60.0	76.2	120.0	27.8	10.5			

K-1

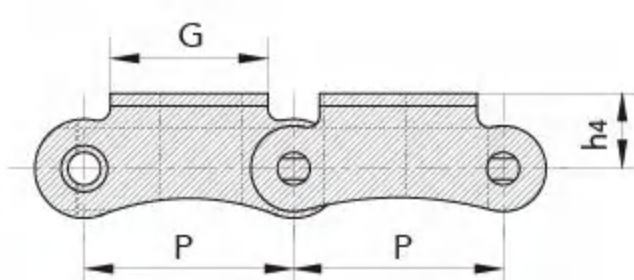









SK-1

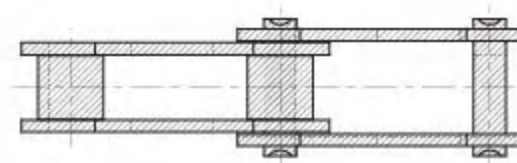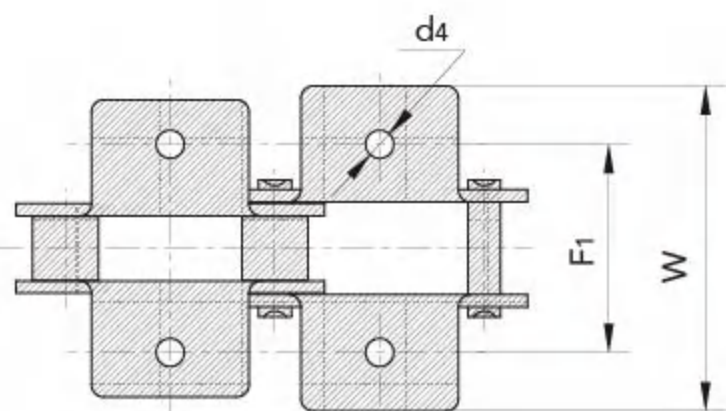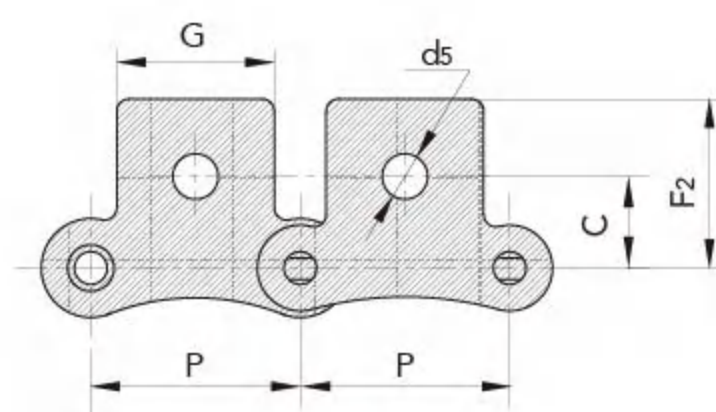

双节距输送链附件 Double pitch conveyor chain attachments

双节距输送链附件 Double pitch conveyor chain attachments

链号 ISO	链号 ANSI	P	G	L	F	W	h4	d4
ISO Chain No.	ANSI Chain No.	mm	mm	mm	mm	mm	mm	mm
C208A C208AL	C2040 C2042	25.40	19.1	9.5	25.4	39.6	9.1	3.4
C208B C208BL		25.40	23.2	12.7	25.4	39.6	9.1	4.5
C210A C210AL	C2050 C2052	31.75	23.8	11.9	31.8	49.0	11.1	5.5
C212A C212AL	C2060 C2062	38.10	28.6	14.3	42.9	67.8	14.7	5.5
C212AH C212AHL	C2060H C2062H	38.10	28.6	14.3	42.9	67.8	14.7	5.5
C216A C216AL	C2080 C2082	50.80	38.1	19.1	55.6	87.8	19.1	6.8
C216AH C216AHL	C2080H C2082H	50.80	38.1	19.1	55.6	87.8	19.1	6.8
C220A C220AL	C2100 C2102	63.50	47.6	23.8	66.6	107.5	23.4	9.2
C220AH C220AHL	C2100H C2102H	63.50	47.6	23.8	66.6	107.5	23.4	9.2
C224A C224AL	C2120 C2122	76.20	57.2	28.6	79.3	121.4	27.8	11.0
C224AH C224AHL	C2120H C2122H	76.20	57.2	28.6	79.3	121.4	27.8	11.0
C232A C232AL	C2160 C2162	101.60	76.2	38.1	104.7	151.6	36.5	13.1
C232AH C232AHL	C2160H C2162H	101.60	76.2	38.1	104.7	151.6	36.5	13.1

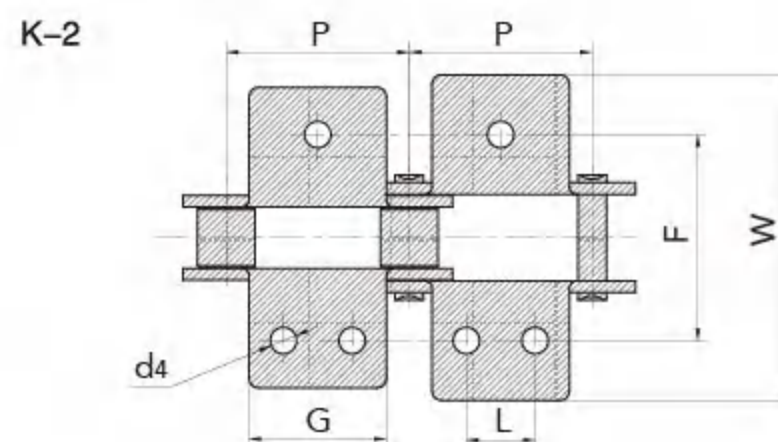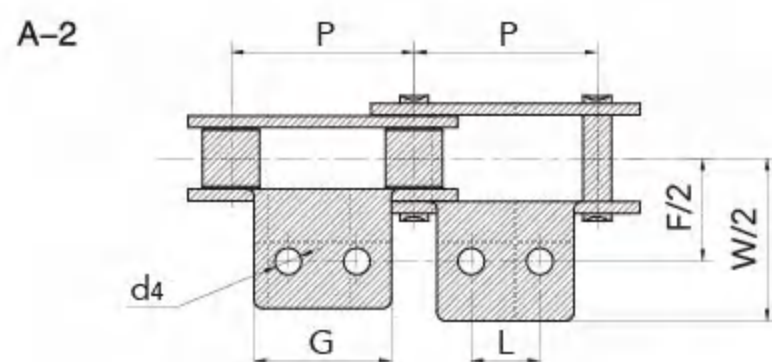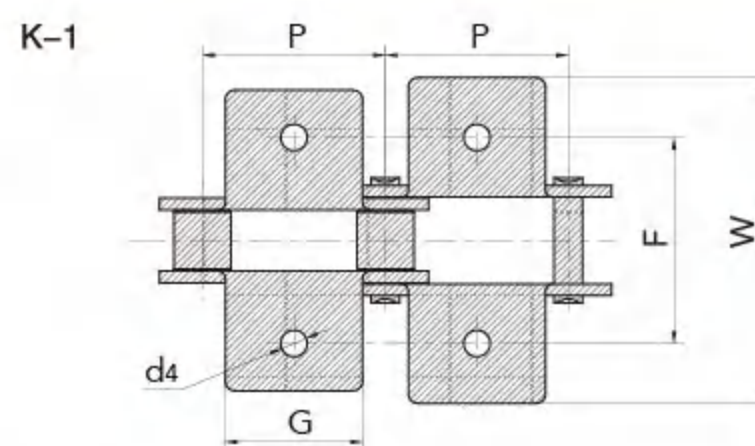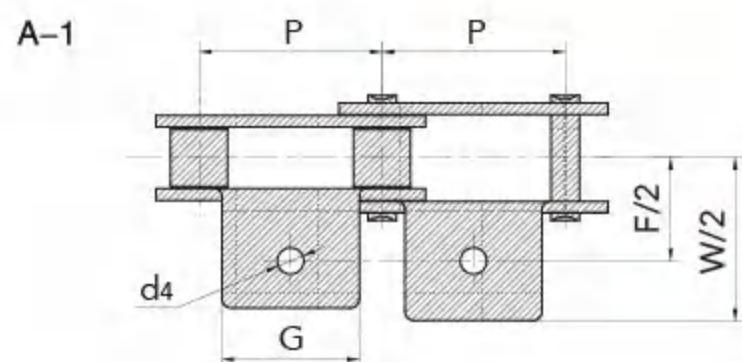

传动链
Driving Chain

曳引链
Hoisting Chain

输送链
Conveyor Chain

不锈钢链
Stainless Steel Chain

农机链
Agricultural Chain


双节距输送链附件

Double pitch conveyor chain attachments


双节距输送链附件 Double pitch conveyor chain attachments

链号 ISO	链号 ANSI	P	G	L	C1	C2	F	d4	d5
ISO Chain No.	ANSI Chain No.	mm	mm	mm	mm	mm	mm	mm	mm
C208A C208AL	C2040 C2042	25.40	19.10	9.50	11.1	13.50	20.5	3.4	5.50
C208B C208BL		25.40	23.20	12.70	11.1	13.50	20.5	4.5	5.50
C210A C210AL	C2050 C2052	31.75	23.80	11.90	14.3	15.90	25.0	5.5	6.60
C212A C212AL	C2060 C2062	38.10	28.60	14.30	17.5	19.10	32.9	5.5	9.20
C212AH C212AHL	C2060H C2062H	38.10	28.60	14.30	17.5	19.10	32.9	5.5	9.20
C216A C216AL	C2080 C2082	50.80	38.10	19.10	22.2	25.40	43.5	6.6	11.00
C216AH C216AHL	C2080H C2082H	50.80	38.10	19.10	22.2	25.40	43.5	6.6	11.00
C220A C220AL	C2100 C2102	63.50	47.60	23.80	28.6	31.80	50.4	8.4	13.00
C220AH C220AHL	C2100H C2102H	63.50	47.60	23.80	28.6	31.80	50.4	8.4	13.00


SA-1

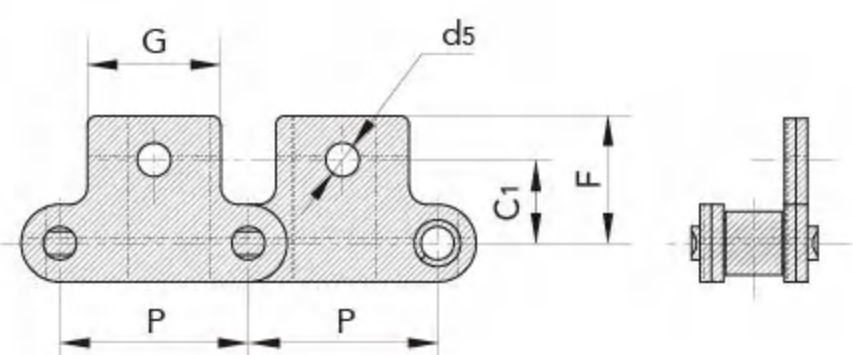


SK-1

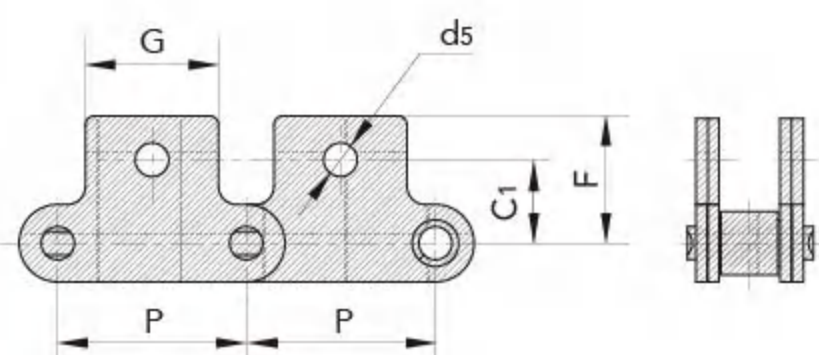

SA-2

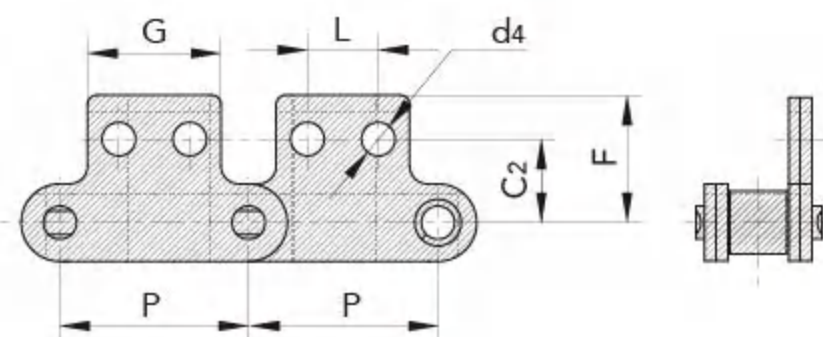

SK-2

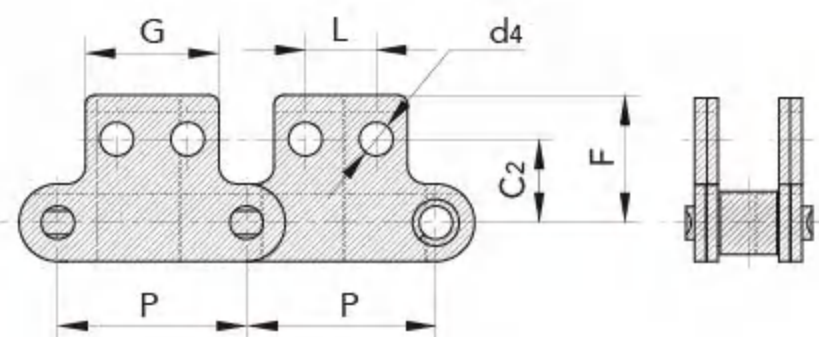


双节距输送链附件 Double pitch conveyor chain attachments


双节距输送链附件 Double pitch conveyor chain attachments

链号 ISO	链号 ANSI	P	G	L	C1	C2	F	d4	d5
ISO Chain No.	ANSI Chain No.	mm	mm	mm	mm	mm	mm	mm	mm
C208A C208AL	C2040 C2042	25.40	19.1	9.5	11.1	13.5	20.5	3.4	5.5
C208B C208BL		25.40	23.2	12.7	11.1	13.5	20.5	4.5	5.5
C210A C210AL	C2050 C2052	31.75	23.8	11.9	14.3	15.9	25.0	5.5	6.6
C212A C212AL	C2060 C2062	38.10	28.6	14.3	17.5	19.1	32.9	5.5	9.2
C212AH C212AHL	C2060H C2062H	38.10	28.6	14.3	17.5	19.1	32.9	5.5	9.2
C216A C216AL	C2080 C2082	50.80	38.1	19.1	22.2	25.4	43.5	6.6	11.0
C216AH C216AHL	C2080H C2082H	50.80	38.1	19.1	22.2	25.4	43.5	6.6	11.0


SAA-1

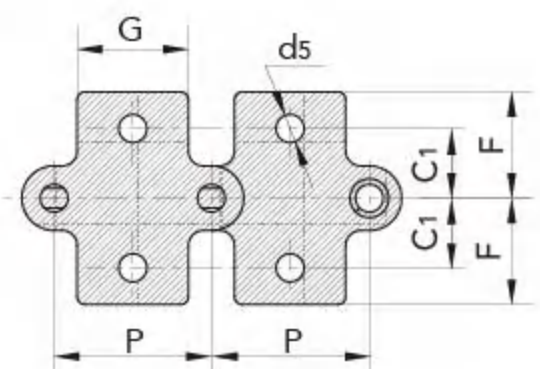


SKK-1

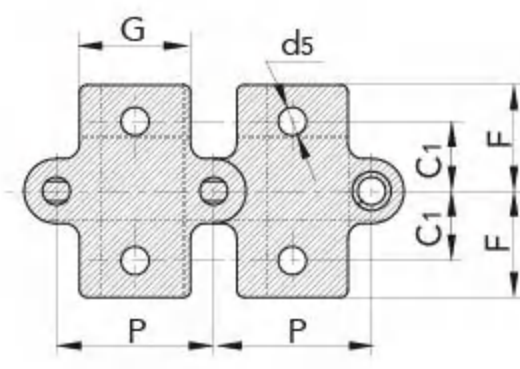

SAA-2

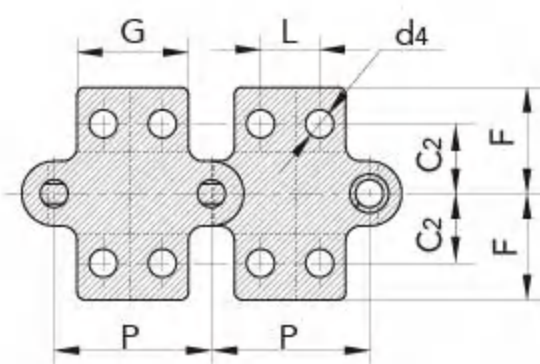

SKK-2

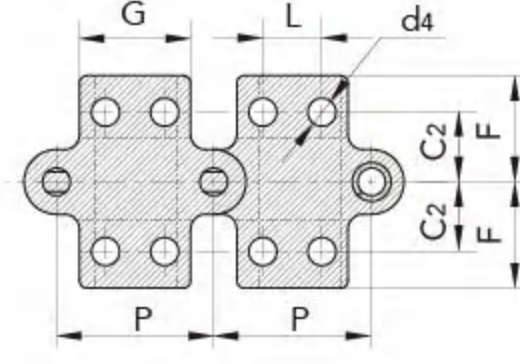

传动链
Driving Chain

曳引链
Hoisting Chain

输送链
Conveyor Chain

不锈钢链
Stainless Steel Chain

农机链
Agricultural Chain


双节距输送链特殊附件

Double pitch conveyor chain special attachments

双节距输送链特殊附件 Double pitch conveyor chain special attachments

链号 ISO	链号 ANSI	P	b1	d2	d3	L	Lc
ISO Chain No.	ANSI Chain No.	mm	mm	mm	mm	mm	mm
C208A C208AL	C2040 C2042	25.40	7.85	3.96	4.1	16.6	18.8
C210A C210AL	C2050 C2052	31.75	9.40	5.08	5.1	20.7	23.3
C212A C212AL	C2060 C2062	38.10	12.57	5.94	6.1	25.9	28.3
C212AH C212AHL	C2060H C2062H	38.10	12.57	5.94	6.1	29.2	31.6
C216A C216AL	C2080 C2082	50.80	15.75	7.92	8.1	32.7	36.5
C216AH C216AHL	C2080H C2082H	50.80	15.75	7.92	8.1	36.2	39.4
C220A C220AL	C2100 C2102	63.50	18.90	9.53	10.1	40.4	44.7
C220AH C220AHL	C2100H C2102H	63.50	18.90	9.53	10.1	43.6	46.9



GK-1

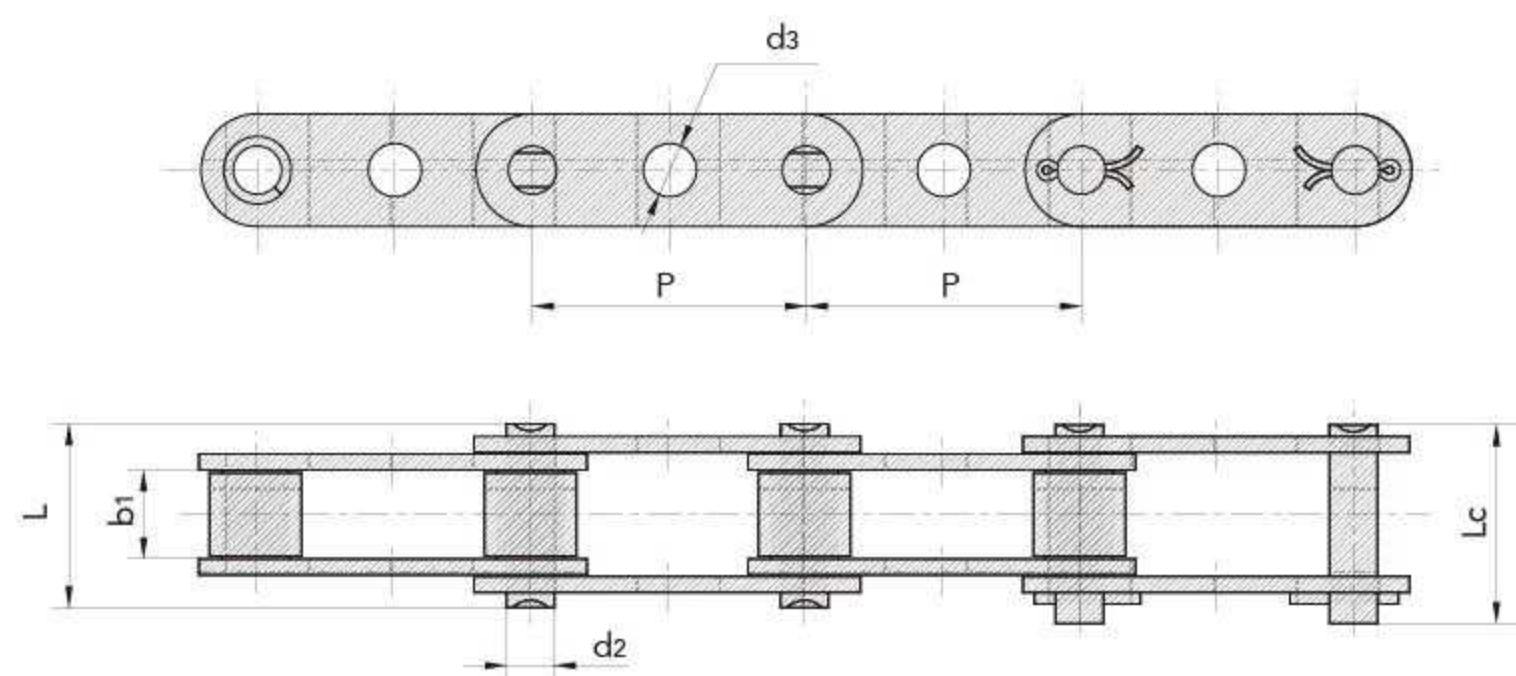

双节距加长销输送链 Double pitch conveyor chain with extended pins

双节距加长销输送链 Double pitch conveyor chain with extended pins

链号 ISO	链号 ANSI	P	b1	d2	L3	L	Lc
ISO Chain No.	ANSI Chain No.	mm	mm	mm	mm	mm	mm
C208A C208AL	C2040 C2042	25.40	7.85	3.96	9.5	25.1	26.2
C210A C210AL	C2050 C2052	31.75	9.40	5.08	11.9	31.3	33.1
C212A C212AL	C2060 C2062	38.10	12.57	5.94	14.3	38.6	40.6
C212AH C212AHL	C2060H C2062H	38.10	12.57	5.94	14.3	42.0	43.8
C216A C216AL	C2080 C2082	50.80	15.75	7.92	19.1	50.3	53.3
C216AH C216AHL	C2080H C2082H	50.80	15.75	7.92	19.1	53.5	55.0
C220A C220AL	C2100 C2102	63.50	18.90	9.53	23.8	61.8	66.1
C220AH C220AHL	C2100H C2102H	63.50	18.90	9.53	23.8	65.0	68.3
C224AH C224AHL	C2120H C2122H	76.20	25.22	11.10	28.6	79.6	83.6
C232AH C232AHL	C2160H C2162H	101.60	31.75	14.27	38.1	103.0	107.8

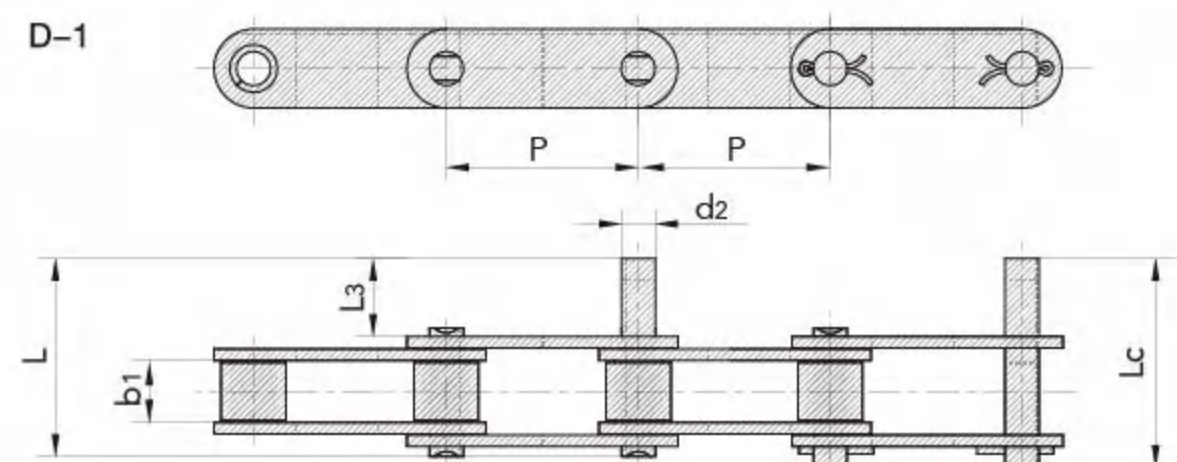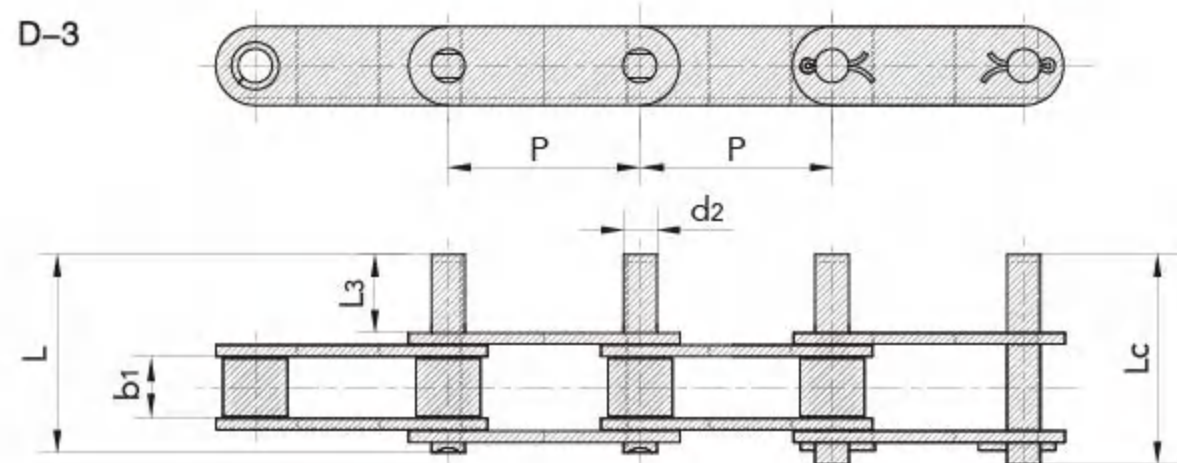

传动链
Driving Chain

曳引链
Hoisting Chain

输送链
Conveyor Chain

不锈钢链
Stainless Steel Chain



农机链
Agricultural Chain

双节距加长销输送链

Double pitch conveyor chain with extended pins



双节距加长销输送链 Double pitch conveyor chain with extended pins

链号 ISO	P	b1	d2	d3	d4	L3	L
ISO Chain No.	mm	mm	mm	mm	mm	mm	mm
C2052F2	31.75	9.40	5.08	6.00	7.0	20.0	39.8
C2052F14	31.75	9.40	5.08	6.00	7.0	21.0	40.4
C2062-D38	38.10	12.57	5.94	5.94	11.1	24.2	48.6
C2062-D39	38.10	12.57	5.94	5.94	13.3	32.2	56.6
C212AHL-D4	38.10	12.57	5.94	5.94	8.0	25.0	53.0
C212AHF3	38.10	12.57	5.94	8.08	10.0	35.0	63.0
C212AHF7	38.10	12.57	5.94	5.94	12.7	41.2	69.2
C212AHF8	38.10	12.57	5.94	8.00	10.0	35.0	63.0
C2060HF9	38.10	12.57	5.94	7.95	12.7	41.3	69.3
C2060HF10	38.10	12.57	5.94	7.70	14.3	41.3	69.3
C2060H-D23	38.10	12.57	5.94	8.80	12.7	41.3	69.3
C2060H-D24	38.10	12.57	5.94	7.95	12.7	44.8	65.6
C2060H-D31	38.10	12.57	5.94	7.95	16.0	45.0	73.0
C2062H-D41	38.10	12.57	5.94	9.53	9.5	22.2	50.0

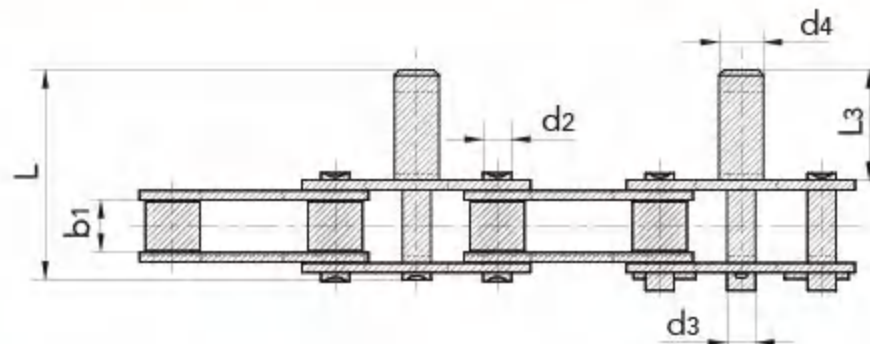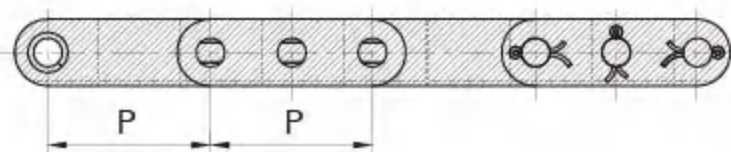

双节距加长销输送链 Double pitch conveyor chain with extended pins


链号	P	b1	d2	d3	L3	L
Chain No.	mm	mm	mm	mm	mm	mm
C2052DF1	31.75	9.40	5.08	7.50	14.15	33.6
C210AF4	31.75	9.40	5.08	11.00	34.00	53.7
C2052-D4	31.75	9.40	5.08	6.00	32.40	52.0
C2050-D5	31.75	9.40	5.08	8.00	40.00	59.7
C212AHL-D4	38.10	12.57	5.94	8.00	25.00	53.0
C2062-D6	38.10	12.57	5.94	12.00	25.00	49.7

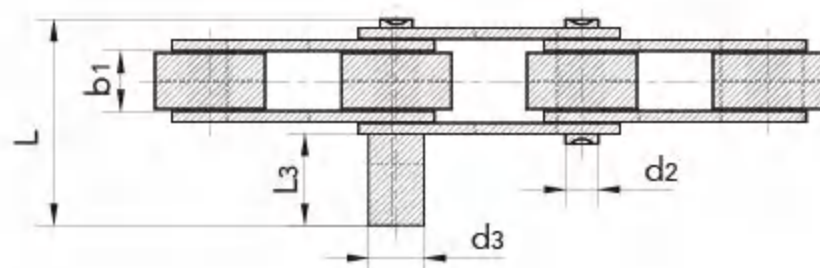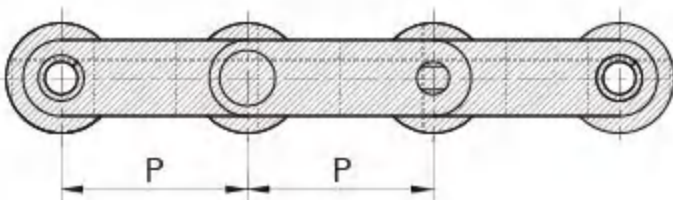

双节距加长销输送链 Double pitch conveyor chain with extended pins


双节距加长销输送链 Double pitch conveyor chain with extended pins

链号	P	b1	d2	d3	d4	d5	L3	L1	L4	L2
Chain No.	mm	mm	mm	mm	mm	mm	mm	mm	mm	mm
C2052F1	31.75	9.40	5.08	6.27	7.13	11.10	28.45	48.35	19.80	39.70
C2062F1	38.10	12.57	5.94	8.71	11.10	12.70	32.50	60.40	25.40	53.30

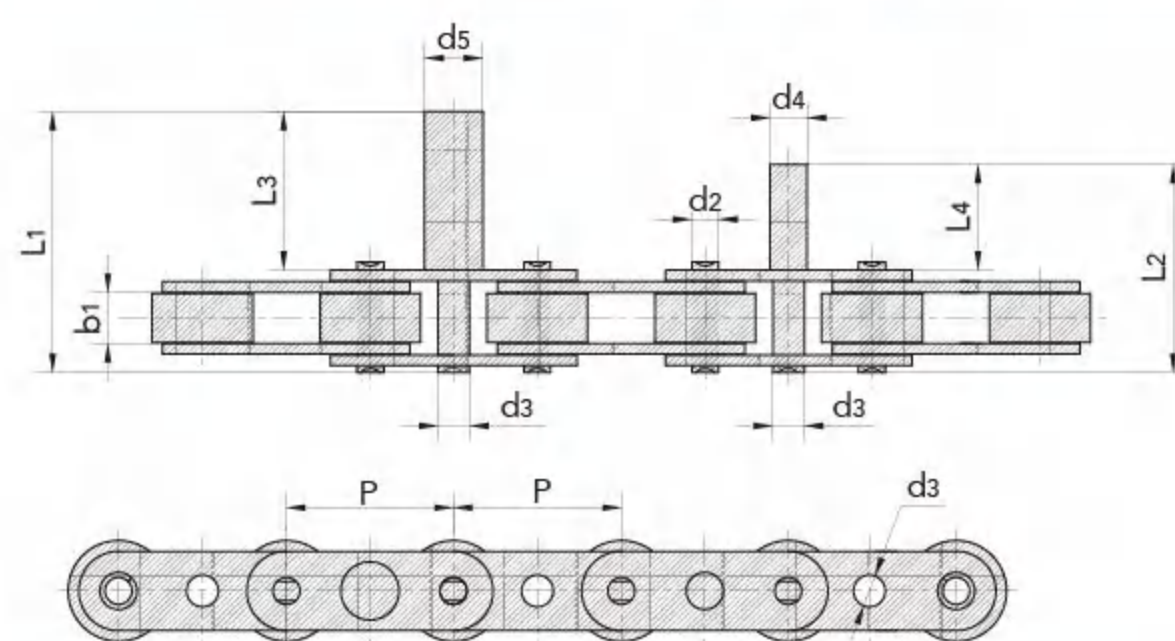

双节距加长销输送链 Double pitch conveyor chain with extended pins



链号	P	b1	h2	G	L	F	W	d4	C
Chain No.	mm	mm	mm	mm	mm	mm	mm	mm	mm
C2052F11	31.75	9.4	15.0	16.0	-	26.6	34.6	6.2	0.50
C2050A6	31.75	9.4	15.0	16.0	-	23.4	32.8	5.5	0.50
C2062HF63A2F1	38.10	25.4	18.0	28.6	14.40	34.5	40.0	5.2	1.43
CS311	50.80	12.7	17.0	23.8	11.89	21.5	33.5	4.9	-

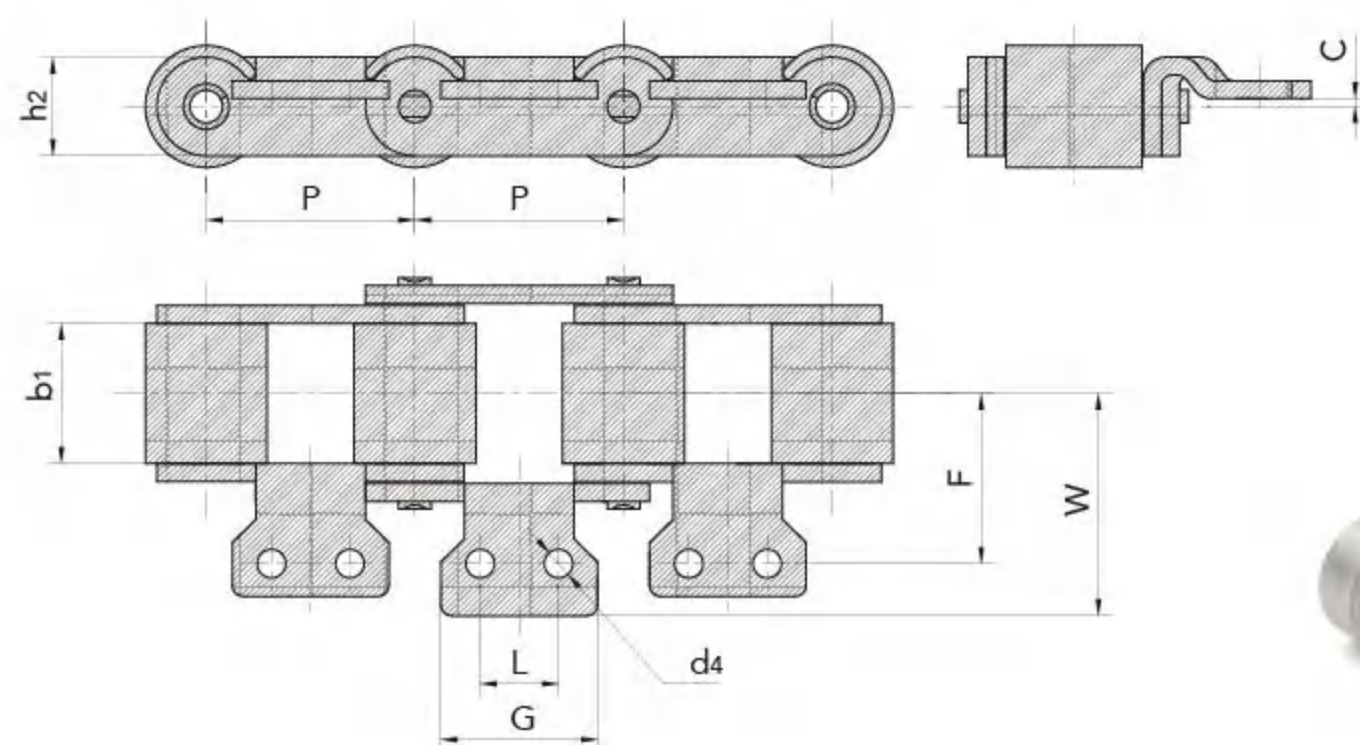

倍速链 Double plus chain

倍速链 Double plus chain

JB 型号	链号	节距 Pitch	滚子尺寸 Roller diameter				销轴直径 Pin diameter	销轴长度 Pin length		链板尺寸 Plate dimension			每米长重 Weight per meter
JB ChainNo.	Chain No.	P	d ₁ max	d ₈ max	b ₁ min	b ₈ max	d ₂ max	L max	L _c max	h ₂ max	T max	t max	q
		mm	mm	mm	mm	mm	mm	mm	mm	mm	mm	mm	kg/m
BS25-C206B	C2030W	19.05	11.91	18.3	4.00	8.0	3.28	24.0	25.6	8.20	1.30	1.50	0.52
BS25-C208A	C2040W	25.40	15.88	24.6	5.70	10.3	3.96	31.0	32.8	11.70	1.50	1.50	0.79
BS25-C210A	C2050W	31.75	19.05	30.6	7.10	13.0	5.08	39.5	41.2	15.00	2.03	2.03	1.36
BS25-C212A	C2060HW	38.10	22.23	36.6	8.50	15.5	5.94	48.8	51.5	18.00	3.25	3.25	2.19
BS25-C216A	C2080W	50.80	28.58	49.0	11.00	21.5	7.92	66.2	70.0	24.00	4.00	5.00	4.06
BS30-C206B		19.05	9.00	18.3	4.50	9.1	3.28	26.3	29.6	7.28	1.30	1.50	0.50
BS30-C208A		25.40	11.91	24.6	6.10	12.5	3.96	35.6	39.5	9.60	1.50	2.00	0.83
BS30-C210A		31.75	14.80	30.6	7.50	15.0	5.08	43.0	47.1	12.20	2.00	2.40	1.27
BS30-C212A		38.10	18.00	37.0	9.75	20.0	5.94	58.1	62.7	15.00	3.00	4.00	2.14
BS30-C216A		50.80	22.23	49.0	12.00	25.2	7.92	71.9	77.3	18.60	4.00	5.00	3.55

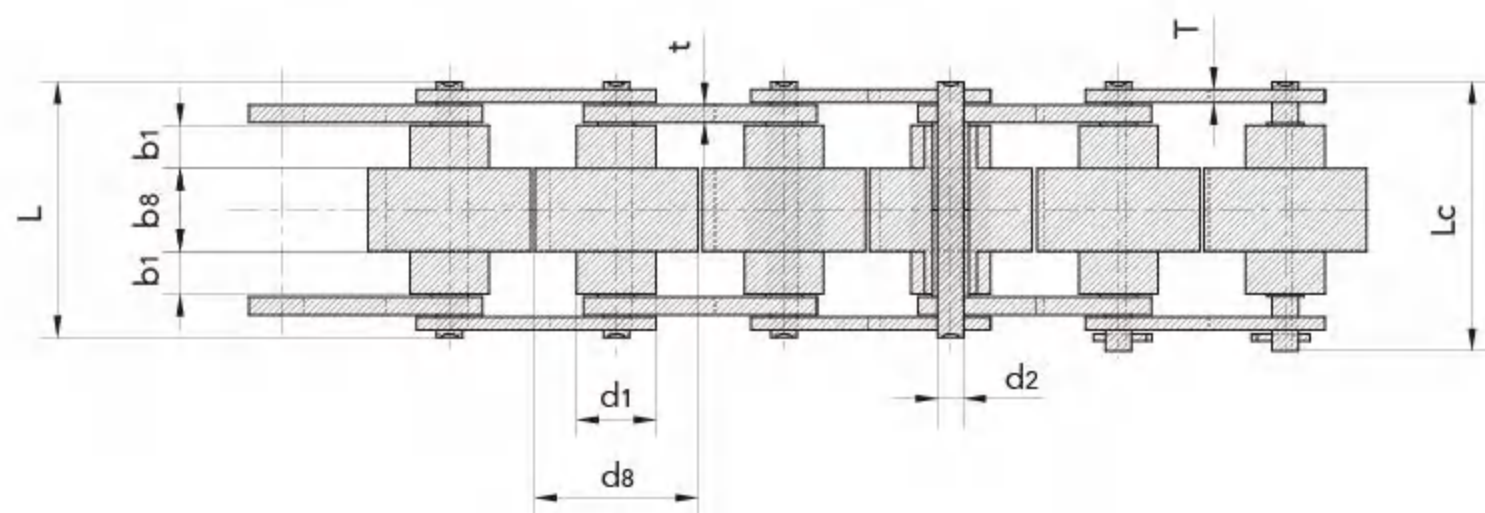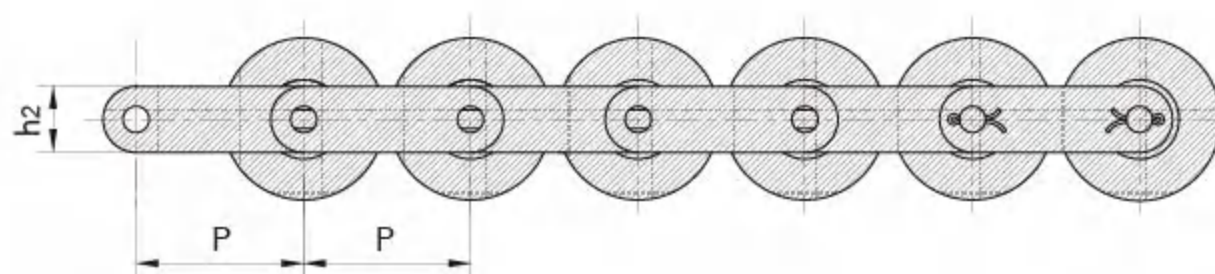


带大滚轮输送链 Conveyor chain with large rollers

带大滚轮输送链 Conveyor chain with large rollers

链号	节距	滚子直径		内节内宽	销轴直径	销轴长度	链板尺寸		极限拉伸载荷	平均拉伸载荷
	Pitch	Roller diameter		Width between inner plates	Pin diameter	Pin length	Plate dimension		Ultimate tensile strength	Average tensile strength
Chain No.	P	d ₁ max	d ₈ max	b ₁ min	d ₂ max	L max	h ₂ max	t/T max	Q min	Q ₀
	mm	mm	mm	mm	mm	mm	mm	mm	kN/lbf	kN
08BS-27-P16/C16	12.70	8.51	16.0	7.75	4.45	27.0	11.8	1.60/1.50	18.0/4091	19.8
12BS	19.05	12.07	28.0	11.68	5.72	45.0	16.0	1.85	28.9/6568	31.7
12BS-40-P28/C28	19.05	12.07	28.0	11.68	5.72	40.0	16.0	1.85	29.0/6591	31.7
12BS-43-P26/C26	19.05	12.07	26.0	11.68	5.72	43.0	16.0	1.85	29.0/6591	31.7
12BS-43-P28/C28	19.05	12.07	28.0	11.68	5.72	43.0	16.0	1.85	29.0/6591	31.7
12BS-48-P24/C24	19.05	12.07	24.0	11.68	5.72	48.0	16.0	1.85	29.0/6591	31.7
12BS-48-P26/C26	19.05	12.07	26.0	11.68	5.72	48.0	16.0	1.85	29.0/6591	31.7
12BS-48-P28/C28	19.05	12.07	28.0	11.68	5.72	48.0	16.0	1.85	29.0/6591	31.7
12BS-58-P28/C28	19.05	12.70	28.0	11.68	5.72	58.0	16.0	1.85	29.0/6591	31.7
16BS-65-P38/C38	25.40	15.88	38.0	17.02	8.28	65.0	21.0	4.15/3.10	60.0/13636	72.8
100SF1-85-C45	31.75	19.05	45.0	25.50	9.53	85.0	30.0	4.00	86.7/19490	104.0
212BS-43-P48	38.10	12.07	48.0	11.68	5.72	43.0	16.0	1.85	28.9/6568	31.7

■注: P 表示滚子材料为塑料, C 表示滚子材料为钢

■Note: P means roller made in plastic, C means roller made in steel

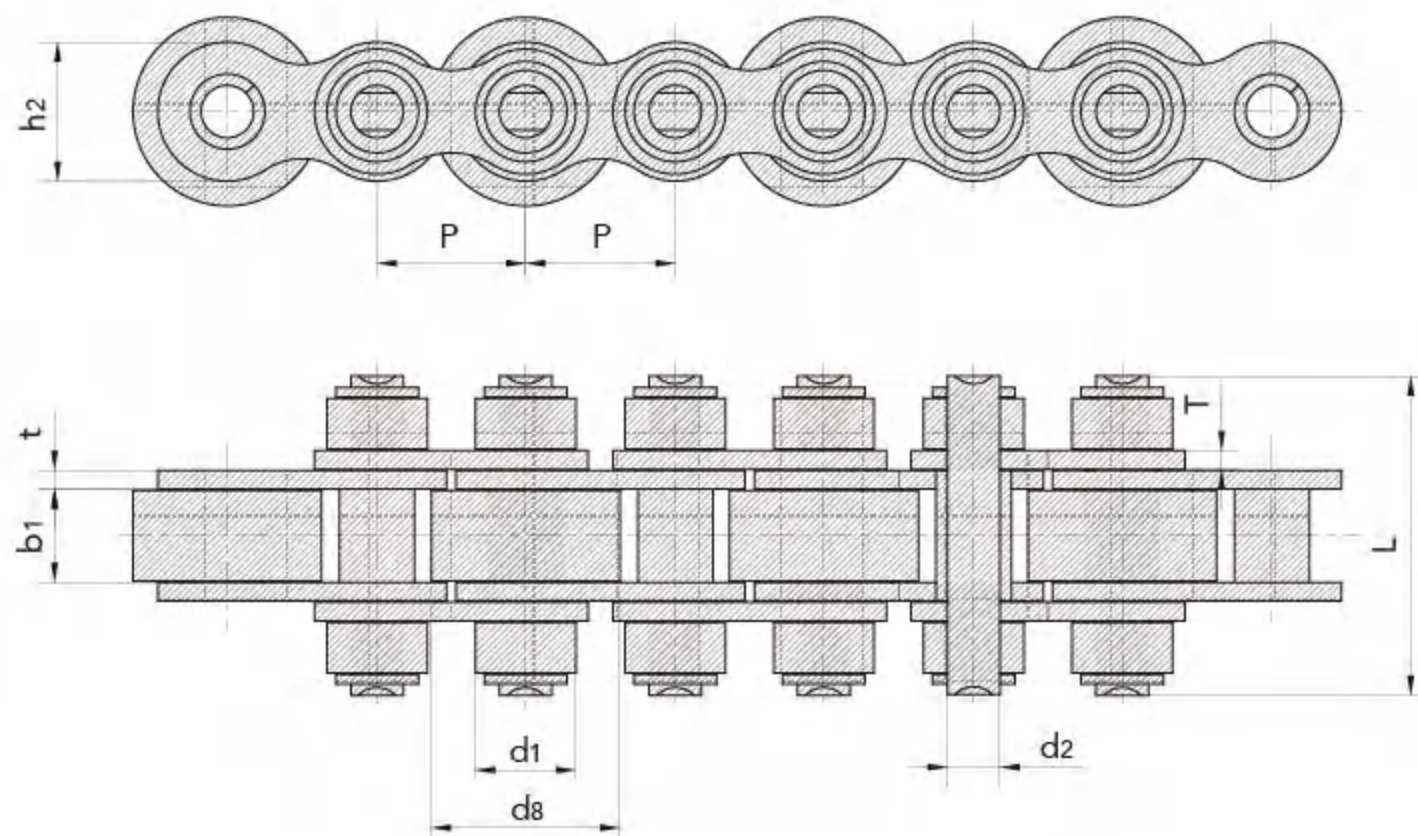

传动链
Driving Chain

起重链
Hoisting Chain

输送链
Conveyor Chain


不锈钢链
Stainless Steel Chain

农机链
Agricultural Chain

木材输送链及附件 Lumber conveyor chain & attachments


木材输送链及附件 Lumber conveyor chain & attachments

链号	节距	滚子直径	内节内宽	销轴直径	销轴长度		内链板高度	链板厚度	极限拉伸载荷	平均拉伸载荷	每米长重
Chain No.	P	d ₁ max	b ₁ min	d ₂ max	L max	L _c max	h ₂ max	T max	Q min	Q ₀	q
	mm	mm	mm	mm	mm	mm	mm	mm	kN/lbf	kN	kg/m
81X	66.27	23.00	27.00	11.10	49.0	53.5	28.50	4.00	106.7/24250	128.9	3.78
81XH	66.27	23.00	27.78	11.10	60.7	65.1	31.35	7.94/5.55	151.9/34523	175.7	5.88
81XHH	66.27	23.00	27.78	11.10	65.6	70.0	31.35	7.94	191.1/43432	212.6	6.70
81XHS	66.27	23.00	27.00	11.10	63.6	68.0	31.80	7.60	152.0/34545	177.2	6.55
500R	50.00	25.40	25.40	14.63	52.0	56.4	40.00	5.00	100.0/22727	114.5	7.13
441.100R	100.00	25.40	25.40	14.63	52.0	56.4	40.00	5.00	100.0/22727	114.5	5.15

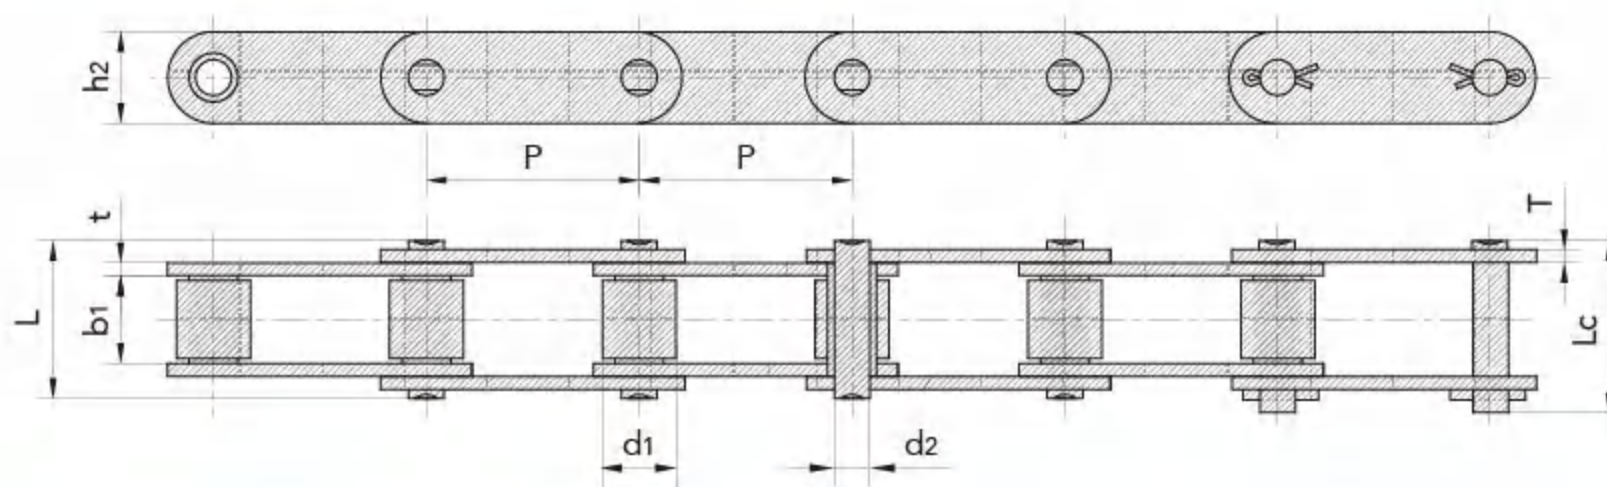

木材输送链及附件 Lumber conveyor chain & attachments

链号	P	F1	F2	G	h4
Chain No.	mm	mm	mm	mm	mm
81XF1(RT)	66.27	17.5	21.8	58.0	23.85

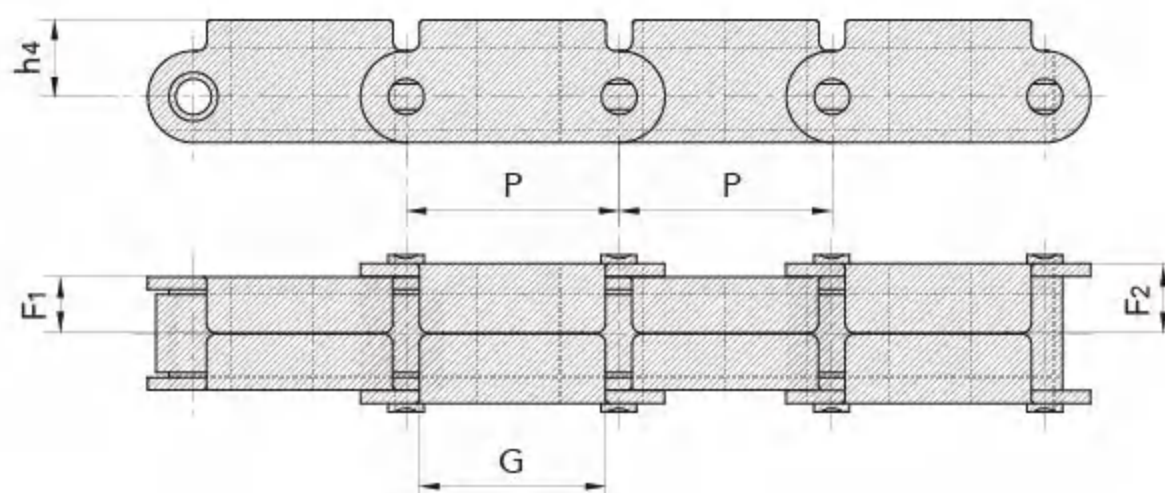

木材输送链及附件 Lumber conveyor chain & attachments

木材输送链及附件 Lumber conveyor chain & attachments

链号	节距	滚子直径	内节内宽	销轴尺寸		链板尺寸					链板厚度	极限拉伸载荷	平均拉伸载荷	每米长重
Chain No.	P	d ₁ max	b ₁ min	d ₂ max	L max	h ₂ max	d ₃ max	d ₄ max	J max	K max	T max	Q _{min}	Q ₀	q
	mm	mm	mm	mm	mm	mm	mm	mm	mm	mm	mm	kN/lbf	kN	kg/m
3939-B4	203.2	23.0	27.0	11.1	49.0	28.58	7.2	7.2	38.1	101.6	4.0	115.58/26268	136.5	2.45
3939-B21	203.2	23.0	27.0	11.1	49.0	28.58	7.2	-	38.1	-	4.0	115.58/26268	136.5	2.45
3939-B23	203.2	23.0	27.0	11.1	49.0	28.58	-	10.3	-	92.1	4.0	115.58/26268	136.5	2.45
3939-B24	203.2	23.0	27.0	11.1	49.0	28.58	-	7.2	-	101.6	4.0	115.58/26268	136.5	2.48
3939-B40	203.2	23.0	27.0	11.1	49.0	28.58	-	10.3	-	101.6	4.0	115.58/26268	136.5	2.45
3939-B43	203.2	23.0	27.0	11.1	49.0	28.58	7.2	10.3	38.1	92.1	4.0	115.58/26268	136.5	2.42
3939-B44	203.2	23.0	27.0	11.1	49.0	28.58	7.2	10.3	38.1	101.6	4.0	115.58/26268	136.5	2.45
3939H-B4	203.2	23.0	27.0	11.1	58.0	28.60	-	7.2	38.0	102.0	6.4	150.00/34082	172.5	3.51



传动链
Driving Chain

曳引链
Hoisting Chain

输送链
Conveyor Chain

不锈钢链
Stainless Steel Chain


农机链
Agricultural Chain

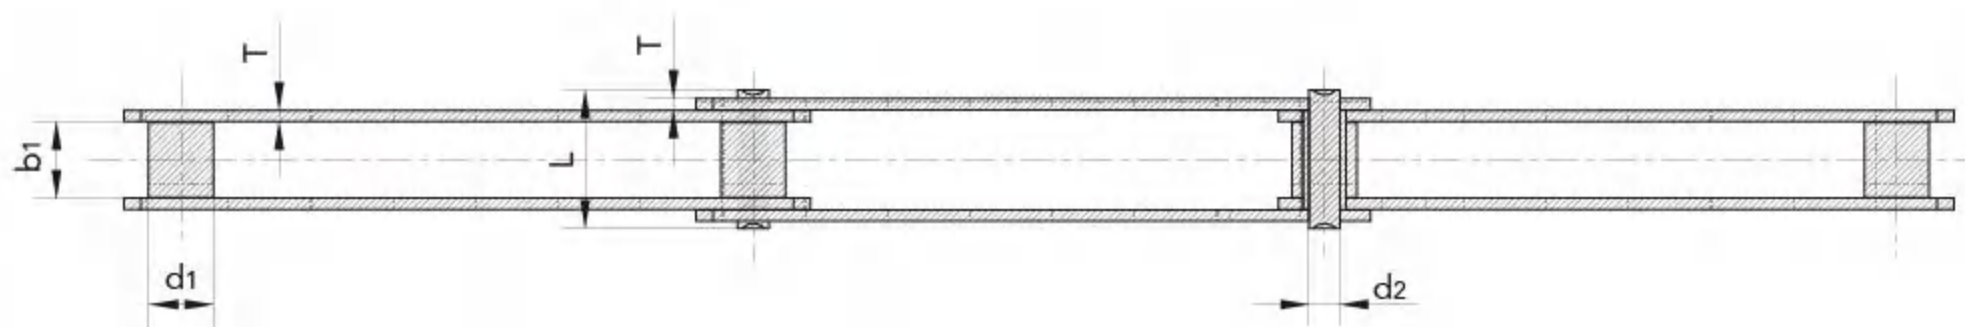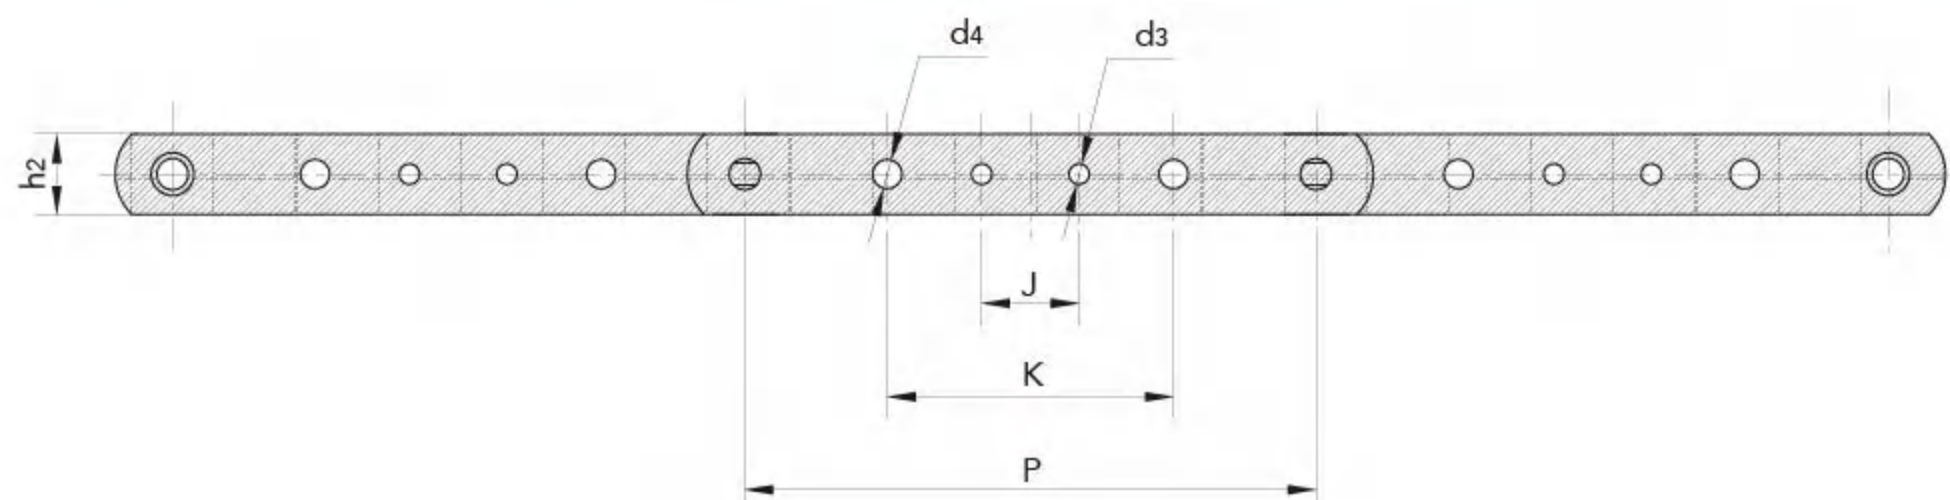

尖齿链 Sharp top chain


尖齿链 Sharp top chain

链号	P	h	H
Chain No.	mm	mm	mm
12AF1	19.05	14.15	21.95
16AF1	25.40	16.60	26.85

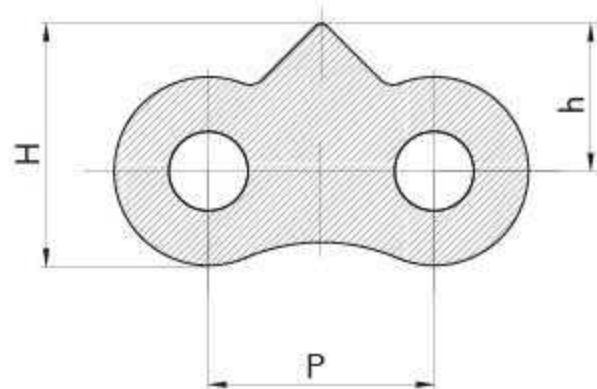


尖齿链 Sharp top chain

链号	P	h	H
Chain No.	mm	mm	mm
C16AF1	25.4	17.5	29.5
C16A-3PEP	25.4	17.4	29.0
C16BF3	25.4	18.7	29.2

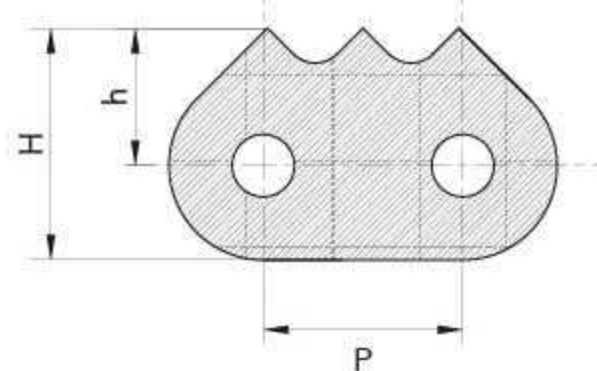

尖齿链 Sharp top chain


链号	P	h	H
Chain No.	mm	mm	mm
12BF3	19.05	13.5	21.5
C16A-1170	25.40	16.5	28.0
16B-1170	25.40	16.0	26.5
16B-1172	25.40	15.0	25.5
C24B-4STC	38.10	18.3	35.0

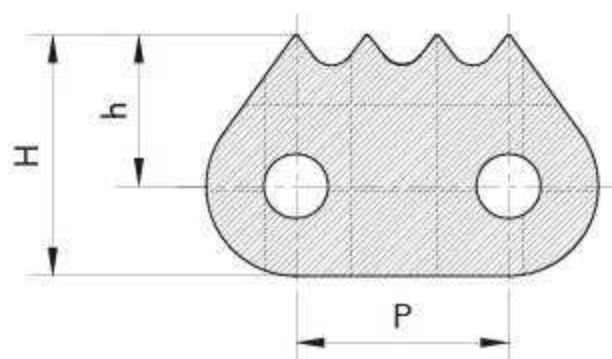


尖齿链 Sharp top chain

链号	P	h	H
Chain No.	mm	mm	mm
12B-910	19.05	13.70	21.70
60-910	19.05	13.20	22.20
60-1ST	19.05	12.70	21.70
C60F2	19.05	13.38	22.48

C60F2

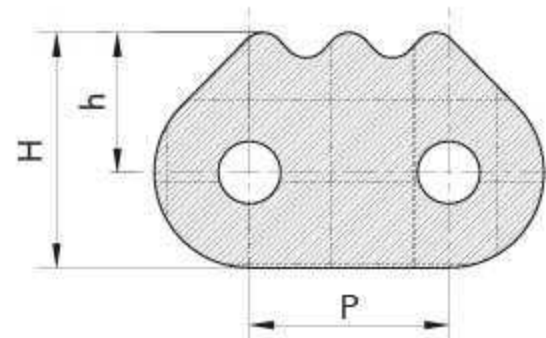


12B-910
60-910
60-1ST

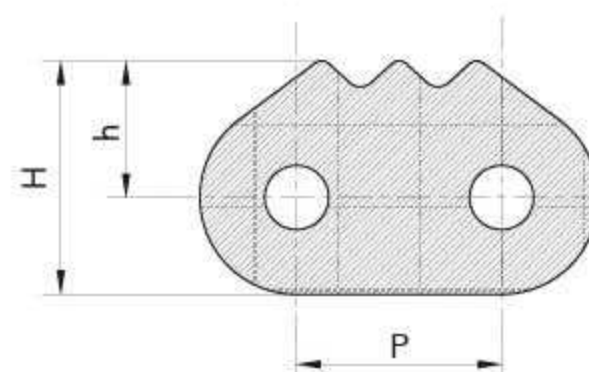

尖齿链 Sharp top chain


尖齿链 Sharp top chain

链号	P	h	H
Chain No.	mm	mm	mm
C100-3STC	31.75	19.15	33.91
C24A-3STC	38.10	23.11	40.95

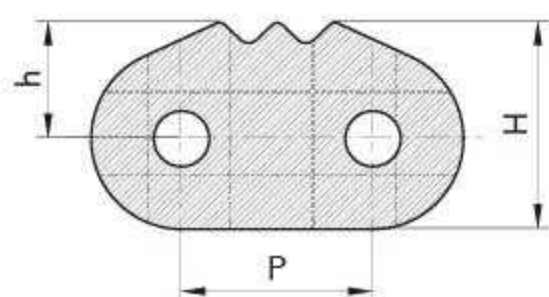


尖齿链 Sharp top chain

链号	P	h	H
Chain No.	mm	mm	mm
12BF1	19.05	13.2	21.2

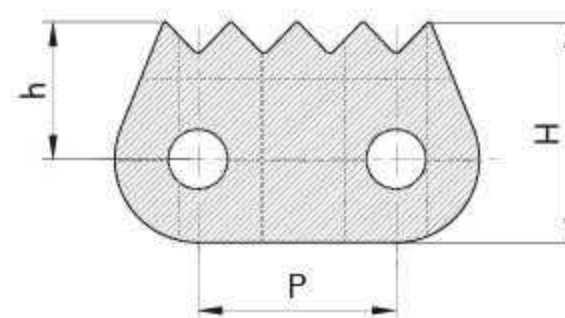


尖齿链 Sharp top chain

链号	P	h	H
Chain No.	mm	mm	mm
60-911	19.05	9.25	18.00
60-912	19.05	9.20	17.95

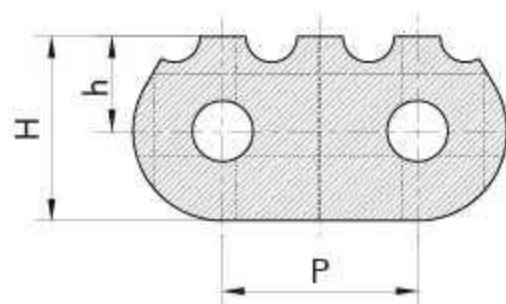

尖齿链 Sharp top chain

链号	P	h	H
Chain No.	mm	mm	mm
LL1044F1	15.875	8.73	15.08

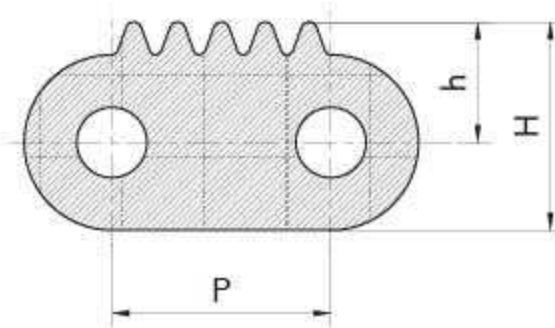

传动链
Driving Chain

曳引链
Hoisting Chain

输送链
Conveyor Chain


不锈钢链
Stainless Steel Chain

农机链
Agricultural Chain

尖齿链 Sharp top chain


尖齿链 Sharp top chain

链号	P	h	H
Chain No.	mm	mm	mm
12AF1	19.05	14.15	21.95
16AF1	25.40	16.60	26.85

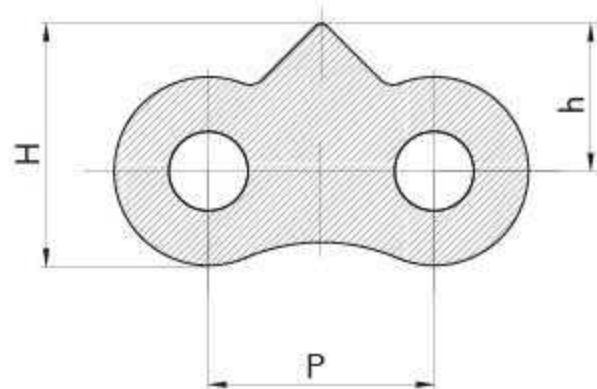


尖齿链 Sharp top chain

链号	P	h	H
Chain No.	mm	mm	mm
C16AF1	25.4	17.5	29.5
C16A-3PEP	25.4	17.4	29.0
C16BF3	25.4	18.7	29.2

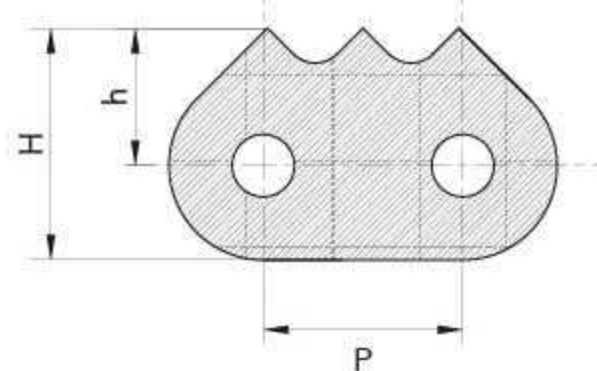

尖齿链 Sharp top chain


链号	P	h	H
Chain No.	mm	mm	mm
12BF3	19.05	13.5	21.5
C16A-1170	25.40	16.5	28.0
16B-1170	25.40	16.0	26.5
16B-1172	25.40	15.0	25.5
C24B-4STC	38.10	18.3	35.0

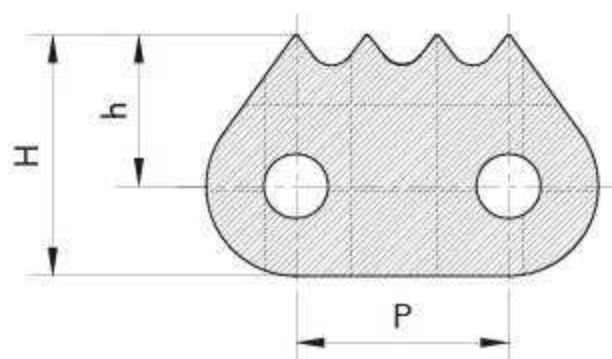


尖齿链 Sharp top chain

链号	P	h	H
Chain No.	mm	mm	mm
12B-910	19.05	13.70	21.70
60-910	19.05	13.20	22.20
60-1ST	19.05	12.70	21.70
C60F2	19.05	13.38	22.48

C60F2

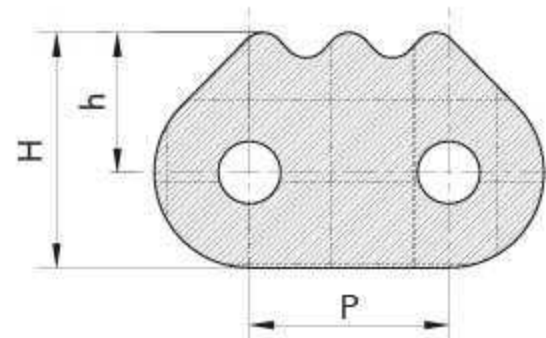


12B-910
60-910
60-1ST

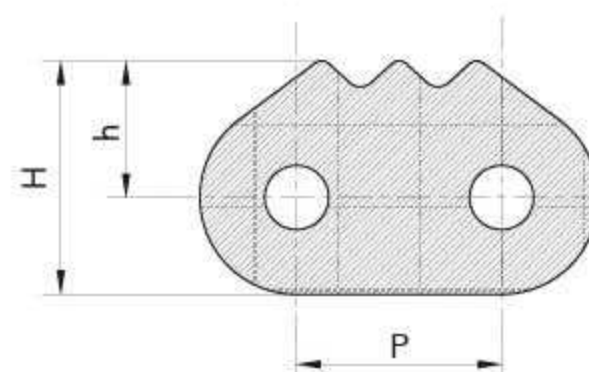

尖齿链 Sharp top chain


尖齿链 Sharp top chain

链号	P	h	H
Chain No.	mm	mm	mm
C100-3STC	31.75	19.15	33.91
C24A-3STC	38.10	23.11	40.95

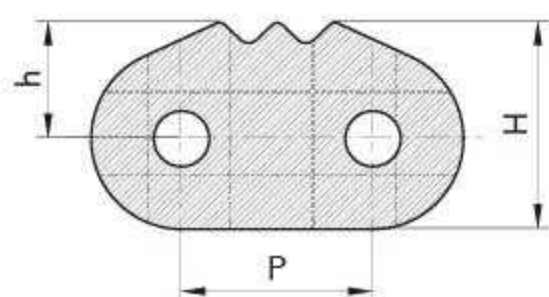


尖齿链 Sharp top chain

链号	P	h	H
Chain No.	mm	mm	mm
12BF1	19.05	13.2	21.2

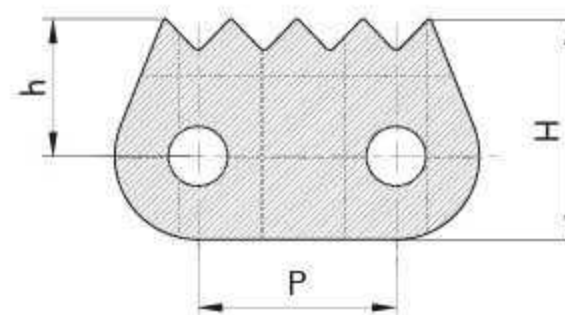


尖齿链 Sharp top chain

链号	P	h	H
Chain No.	mm	mm	mm
60-911	19.05	9.25	18.00
60-912	19.05	9.20	17.95

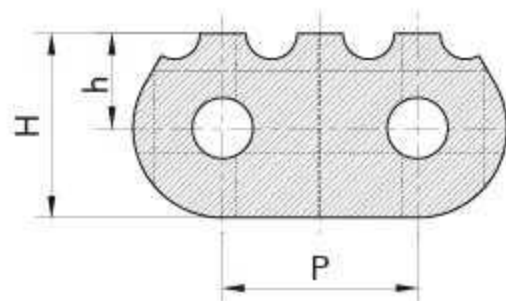

尖齿链 Sharp top chain

链号	P	h	H
Chain No.	mm	mm	mm
LL1044F1	15.875	8.73	15.08

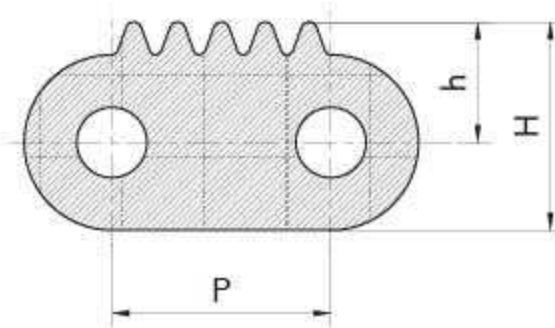

传动链
Driving Chain

曳引链
Hoisting Chain

输送链
Conveyor Chain


不锈钢链
Stainless Steel Chain

农机链
Agricultural Chain

尖齿链 Sharp top chain


尖齿链 Sharp top chain

链号	P	h	H	L
Chain No.	mm	mm	mm	mm
C12B-9010	19.05	13.00	21.00	19.05
C12B-940	19.05	13.20	22.30	19.75
C16B-1160	25.40	10.50	27.50	25.40
C16B-1161	25.40	17.00	27.50	25.40
C16A-1160	25.40	18.00	29.50	25.40

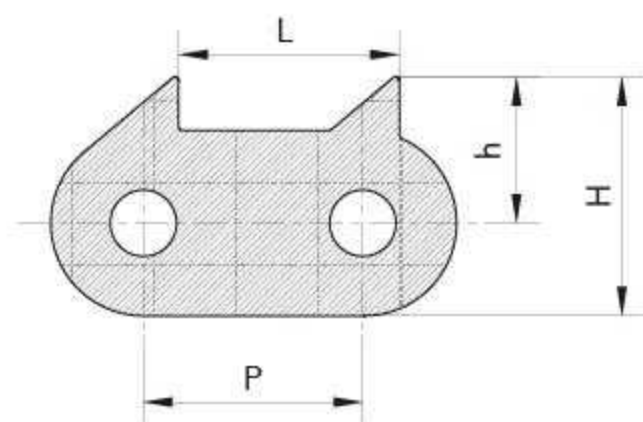


尖齿链 Sharp top chain

链号	P	h	H	L
Chain No.	mm	mm	mm	mm
11B-1187	25.4	16.00	26.50	46.00

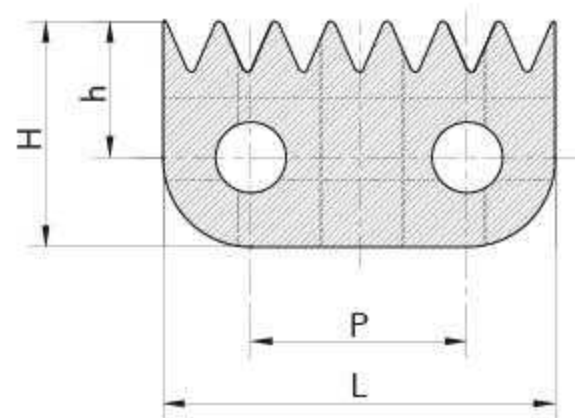


尖齿链 Sharp top chain

链号	P	h	H
Chain No.	mm	mm	mm
40AF1	63.50	55.20	66.60

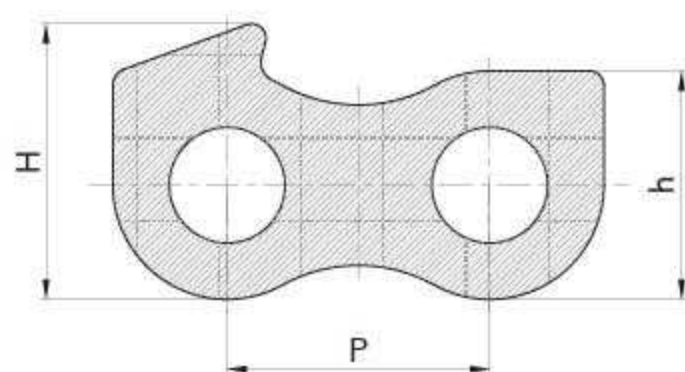

尖齿链 Sharp top chain

链号	P	L	h	H
Chain No.	mm	mm	mm	mm
20AF1	31.75	57.20	14.75	35.84

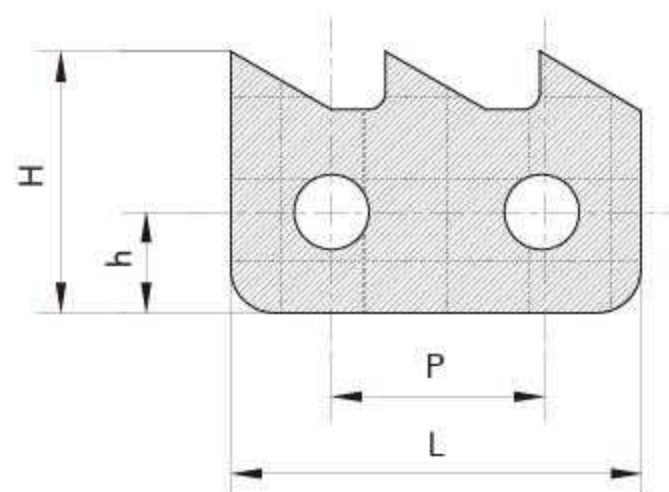

传动链
Driving Chain

曳引链
Hoisting Chain

输送带
Conveyor Chain


不锈钢链
Stainless Steel Chain

农机链
Agricultural Chain

尖齿链 Sharp top chain


尖齿链 Sharp top chain

链号	P	h	H
Chain No.	mm	mm	mm
20B-6STC	31.75	16350	29.20

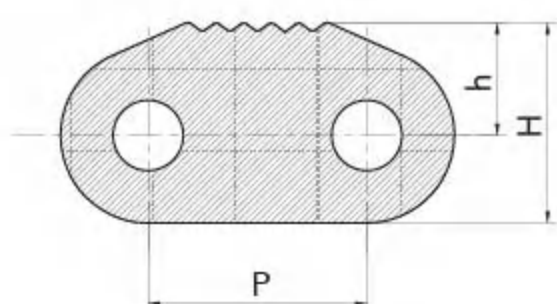

尖齿链 Sharp top chain


链号	P	L	h	H
Chain No.	mm	mm	mm	mm
C20A-1-4STC	31.75	46.75	18.3	33.3
120-1802	38.10	73.10	21.0	38.5
24B-1809	38.10	73.10	21.0	38.5

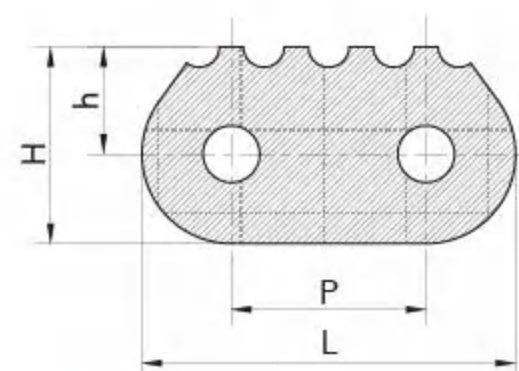


尖齿链 Sharp top chain

链号	P	L	h	H
Chain No.	mm	mm	mm	mm
24B-1805	38.10	73.10	21.00	38.50
24B-1807	38.10	73.10	25.50	43.00
C24B-1820	38.10	73.10	21.00	38.50


24B-1805

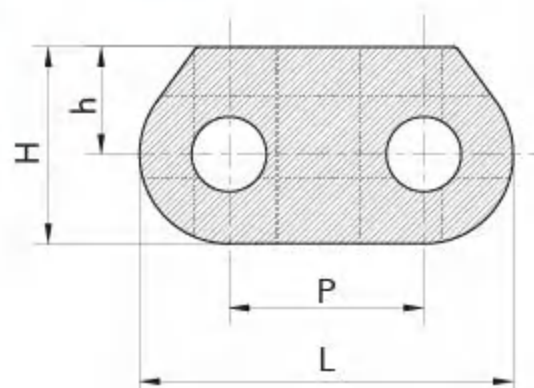

24B-1807

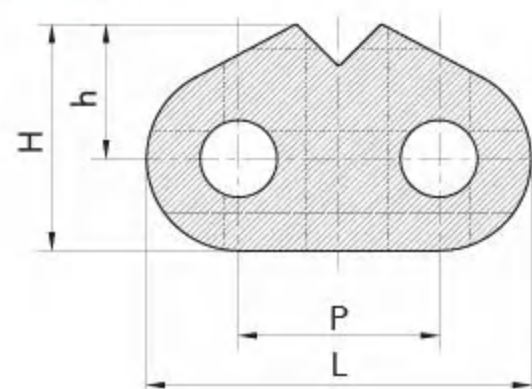


C24B-1820

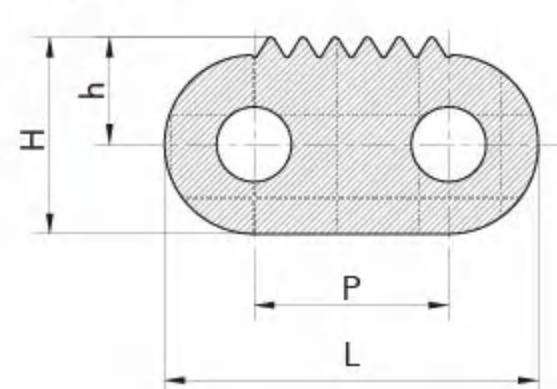

尖齿链 Sharp top chain


链号	P	h	H	L
Chain No.	mm	mm	mm	mm
32BF4	50.80	26.00	70.00	30.00

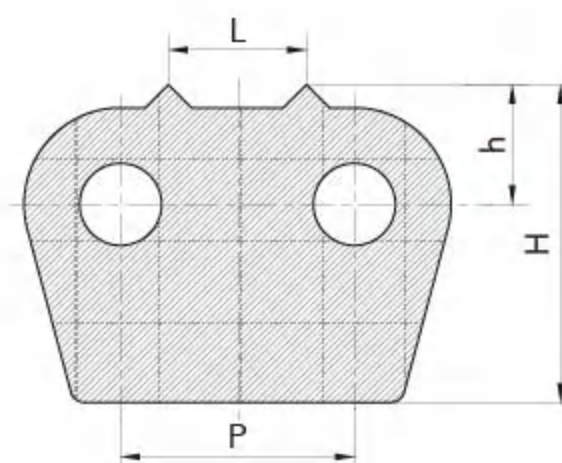

尖齿链 Sharp top chain


尖齿链 Sharp top chain

链号	P	h	H	L
Chain No.	mm	mm	mm	mm
32B-1875	50.80	27.00	72.00	19.00
20BF20-1875	50.80	30.00	74.00	13.50

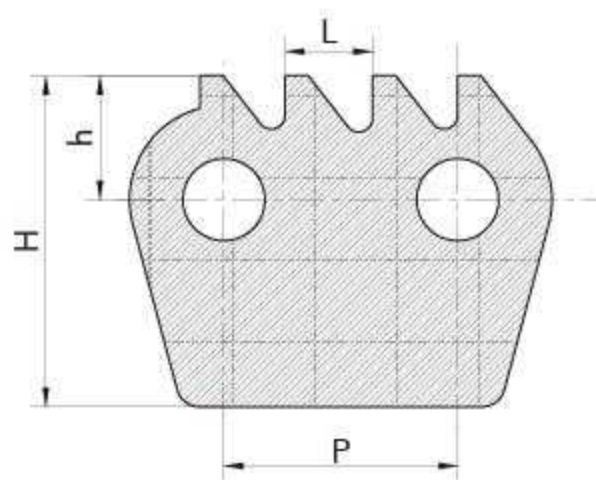


尖齿链 Sharp top chain

链号	P	h	H	L
Chain No.	mm	mm	mm	mm
32B-1876	50.80	27.00	72.00	50.80

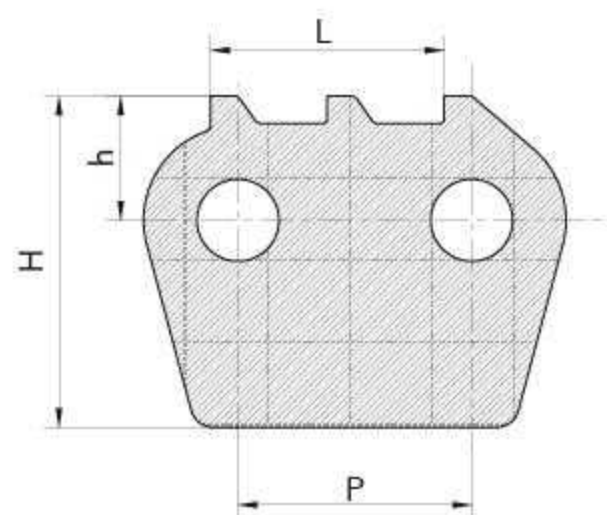


尖齿链 Sharp top chain

链号	P	h	H	L
Chain No.	mm	mm	mm	mm
32B-1877	50.80	30.00	51.00	50.80

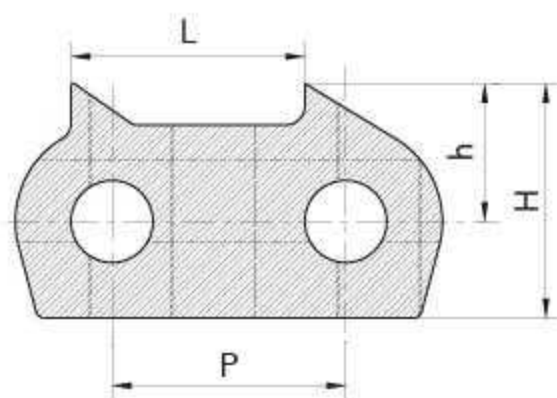

尖齿链 Sharp top chain

链号	P	h	H	L
Chain No.	mm	mm	mm	mm
32B-1878	50.80	27.00	72.00	50.80

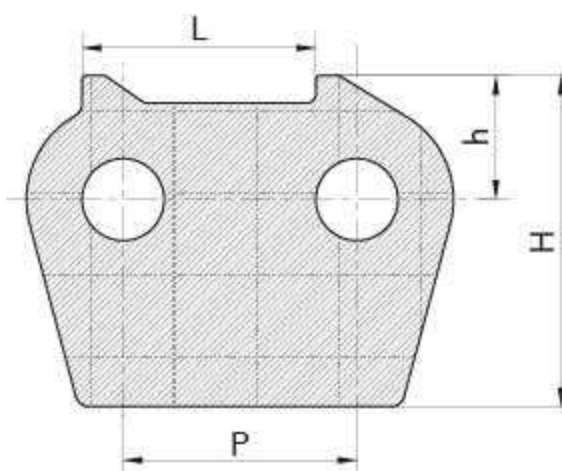

传动链
Driving Chain

曳引链
Hoisting Chain

输送带
Conveyor Chain


不锈钢链
Stainless Steel Chain

农机链
Agricultural Chain

尖齿链 Sharp top chain


尖齿链 Sharp top chain

链号	P	h	H	L
Chain No.	mm	mm	mm	mm
32B-1875	50.80	27.00	72.00	19.00
20BF20-1875	50.80	30.00	74.00	13.50

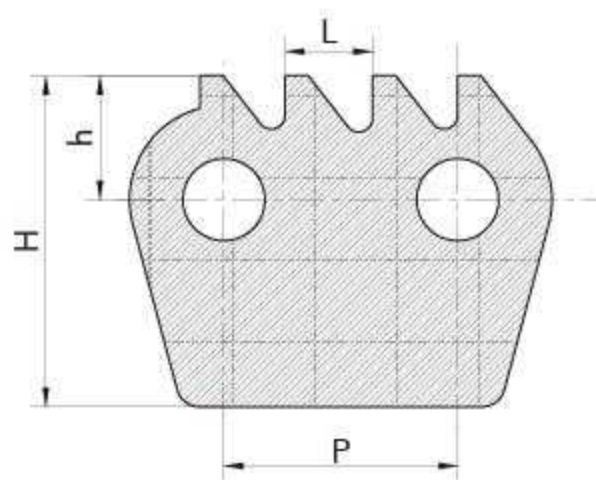


尖齿链 Sharp top chain

链号	P	h	H	L
Chain No.	mm	mm	mm	mm
32B-1876	50.80	27.00	72.00	50.80

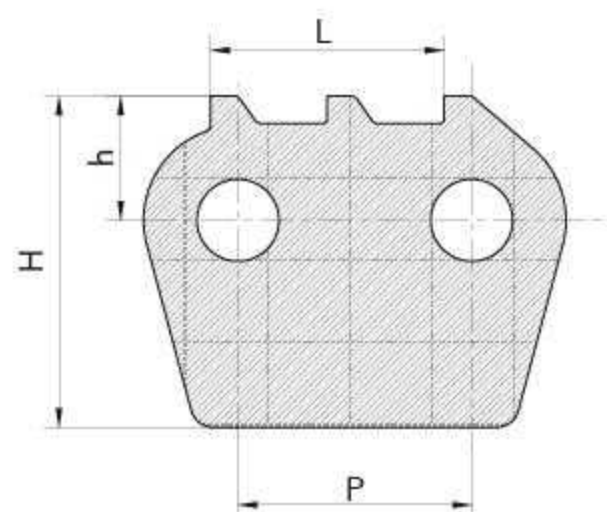


尖齿链 Sharp top chain

链号	P	h	H	L
Chain No.	mm	mm	mm	mm
32B-1877	50.80	30.00	51.00	50.80

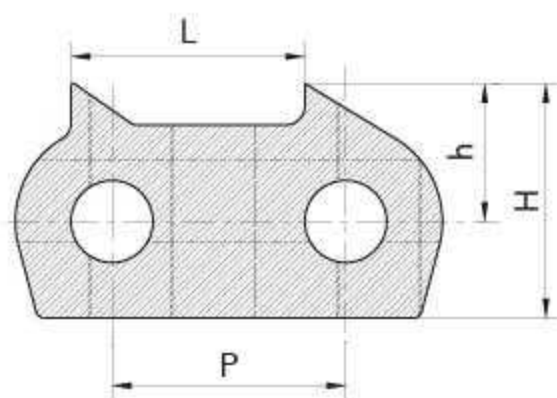

尖齿链 Sharp top chain

链号	P	h	H	L
Chain No.	mm	mm	mm	mm
32B-1878	50.80	27.00	72.00	50.80

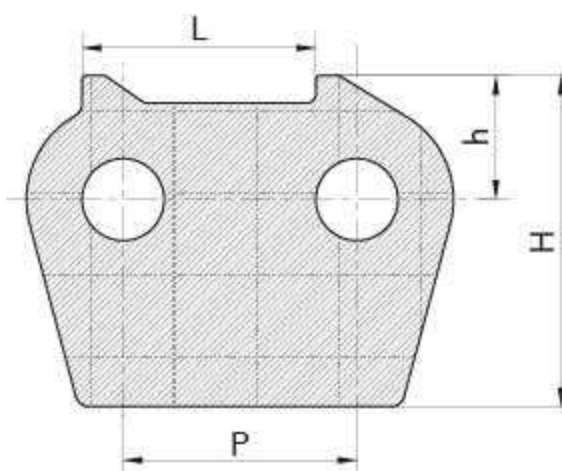

传动链
Driving Chain

曳引链
Hoisting Chain

输送带
Conveyor Chain



不锈钢链
Stainless Steel Chain

农机链
Agricultural Chain

尖齿链 Sharp top chain

尖齿链 Sharp top chain


链号	节距 Pitch	滚子直径 Roller diameter	内节内宽 Width between inner plates	销轴直径 Pin diameter	销轴长度 Pin length		链板厚度 Plate thickness	极限拉伸载荷 Ultimate tensile strength	平均拉伸载荷 Average tensile strength	每米长重 Weight per meter
Chain No.	P	d ₁ max	b ₁ min	d ₂ max	L max	L _c max	T max	Q _{min}	Q _o	q
	mm	mm	mm	mm	mm	mm	mm	kN/lbf	kN	kg/m
32B-1-1872	50.8	29.21	33.0	17.81	66.0	71.0	6.0	250.0/56818	275.0	13.54

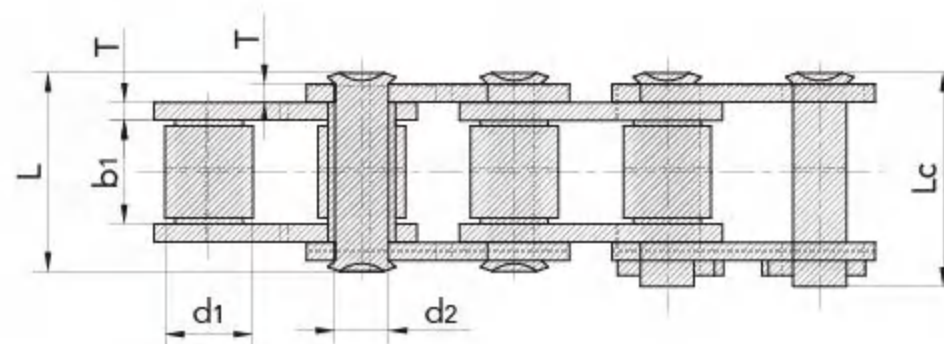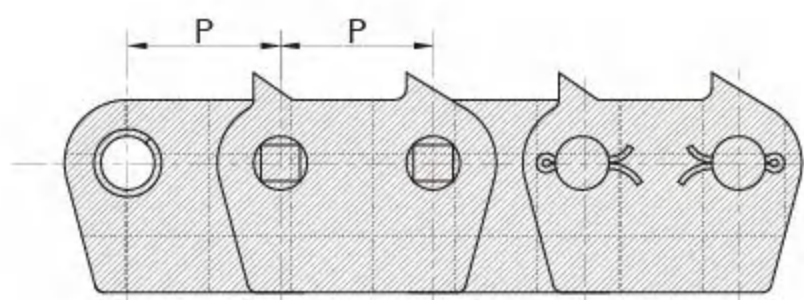


尖齿链 Sharp top chain

链号	P	L	h	h1	H
Chain No.	mm	mm	mm	mm	mm
32B-1872	50.8	92.8	-	43.0	64.0
32BF1	50.8	92.8	21.0	30.0	73.0
32B-1900F1	50.8	92.8	21.0	30.0	75.0
32BF15	50.8	91.8	20.0	45.0	75.0
C32B-1874F1	50.8	92.8	21.0	40.0	83.0

32B-1872

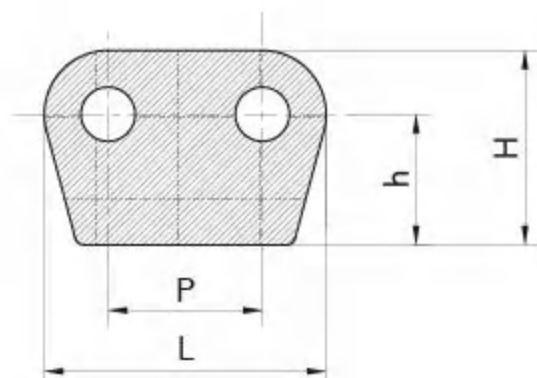


32BF1
32B-1900F1
32BF15
C32B-1874F1

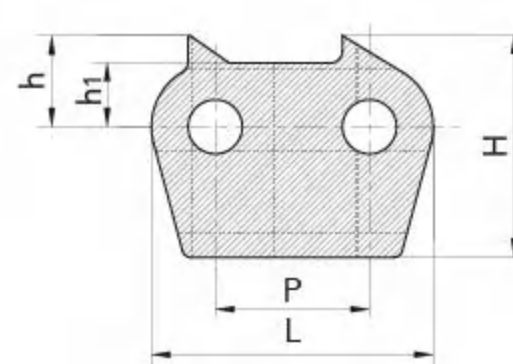


橡胶链 Roller chain with vulcanised elastomer profiles

橡胶链 Roller chain with vulcanised elastomer profiles


链号	节距	滚子直径	内节内宽	销轴直径	销轴长度	链板尺寸					极限拉伸载荷	每米长重
Chain No.	Pitch	Roller diameter	Width between inner plates	Pin diameter	Pin length	Plate dimension					Ultimate tensile strength	Weight per meter
	P	d ₁ max	b ₁ min	d ₂ max	L max	h ₂ max	A	B	H	T	Q _{min}	q
	mm	mm	mm	mm	mm	mm	mm	mm	mm	mm	kN/lbf	kg/m
08B-G1	12.700	8.51	7.75	4.45	20.0	11.80	14.60	24.20	12.3	1.60	18.0/4091	1.19
08B-G2	12.700	8.51	7.75	4.45	34.3	11.80	28.40	24.20	12.3	1.50	32.0/7273	2.07
10A-G1	15.875	10.16	9.40	5.08	24.5	15.09	17.50	31.00	17.0	1.60	21.8/4953	1.70
10B-G1	15.875	10.16	9.65	5.08	23.2	14.70	16.80	30.00	17.0	1.60	19.0/4318	1.62
10B-G2	15.875	10.16	9.65	5.08	39.7	14.70	33.30	30.00	17.0	1.50	44.5/10004	2.56
10B-G2F5	15.875	10.16	9.65	5.08	39.7	14.70	33.30	30.00	25.3	1.50	44.5/10004	2.58
12B-G1	19.050	12.07	11.68	5.72	25.7	16.00	19.60	36.00	21.0	1.85	29.0/6591	2.01
12B-G2	19.050	12.07	11.68	5.72	45.3	16.00	39.10	36.00	16.0	1.85	57.8/13136	3.21
12A-G1	19.050	11.91	12.57	5.94	29.9	18.00	21.40	37.05	21.0	1.85	31.8/7153	2.55
12A-G2	19.050	11.91	12.57	5.94	52.9	18.00	44.50	37.05	21.0	1.85	62.3/14005	4.25
12AF1-G1	19.050	11.91	17.00	5.94	34.0	18.00	26.00	36.00	16.0	1.85	31.8/7153	2.62
16A-G1	25.400	15.88	15.75	7.92	37.2	24.00	27.50	46.00	20.0	2.42	42.0/9545	3.97
16A-G2	25.400	15.88	15.75	7.92	68.0	24.00	57.20	46.00	20.0	2.42	84/18896	7.27
16B-G1	25.400	15.88	17.02	8.28	39.7	21.00	29.10	49.00	21.4	1.60	60.0/	3.95
16B-G1F1	25.400	15.88	17.02	8.28	40.6	21.00	30.00	49.00	21.4	2.03	60.0/	3.95
20A-G1	31.750	19.05	18.90	9.53	46.8	30.00	34.00	57.60	28.0	3.10	86.7/19503	6.15
20B-G1	31.750	19.05	19.56	10.19	48.0	26.40	36.00	57.00	27.0	3.50	85.0/19318	6.19
24B-G1	38.100	25.40	25.40	14.63	61.6	33.20	47.00	72.60	34.0	4.50	160.0/36363	11.25

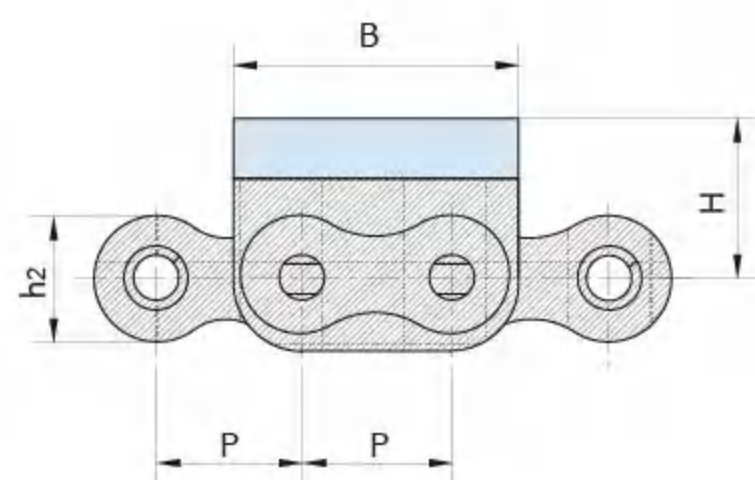

带G1部件
With G1 profile

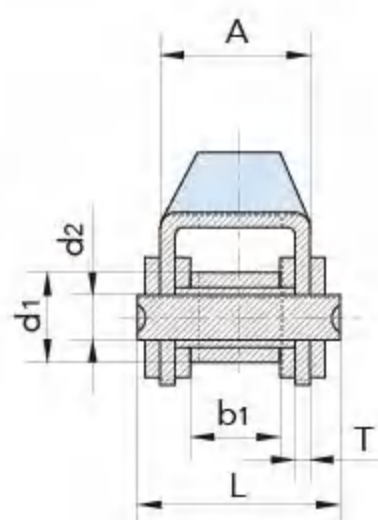

带G2部件
With G2 profile

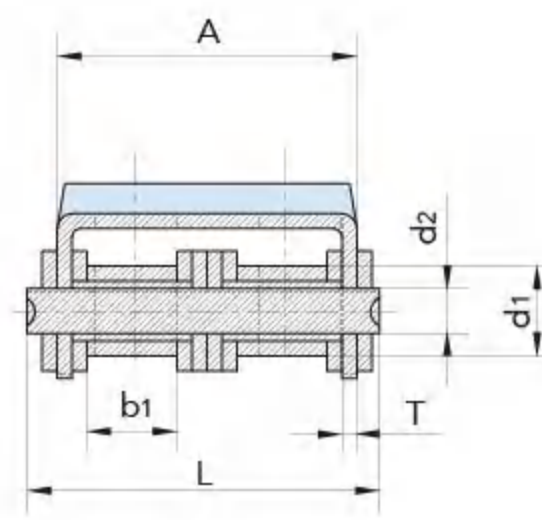


带顶滚轮短节距输送链

Short pitch conveyor chain with top rollers

带顶滚轮短节距输送链 Short pitch conveyor chain with top rollers


链号	节距	滚子直径		内节内宽	销轴直径	销轴长度				附板尺寸		抗拉强度	每米长重
	Pitch	Roller diameter		Width between inner plates	Pin diameter	Pin length				Attachment dimension		Tensile strength	Weight per meter
Chain No.	P	d ₁ max	d ₃ max	b ₁ min	d ₂ max	L _{max}	L ₂ max	L ₃ max	L ₄ max	G	C	Q _{min}	q
	mm	mm	mm	mm	mm	mm	mm	mm	mm	mm	mm	kN/lbf	kg/m
40-1-1TR	12.700	7.95	11.00	7.85	3.96	13.50	16.60	17.80	18.80	9.5	12.7	14.1/3250	1.44
50-1-1TR	15.875	10.16	15.00	9.40	5.08	16.50	20.70	22.20	23.30	12.7	15.9	22.2/4991	2.30
60-1-1TR	19.050	11.91	18.00	12.57	5.94	21.00	25.90	27.70	28.30	15.9	18.3	31.8/7227	3.40
80-1-1TR	25.400	15.88	24.00	15.75	7.92	26.20	32.70	35.00	36.50	19.1	24.6	56.7/12746	5.90
100-1-1TR	31.750	19.05	30.00	18.90	9.53	32.30	40.40	44.70	44.70	25.4	31.8	88.5/20114	8.90

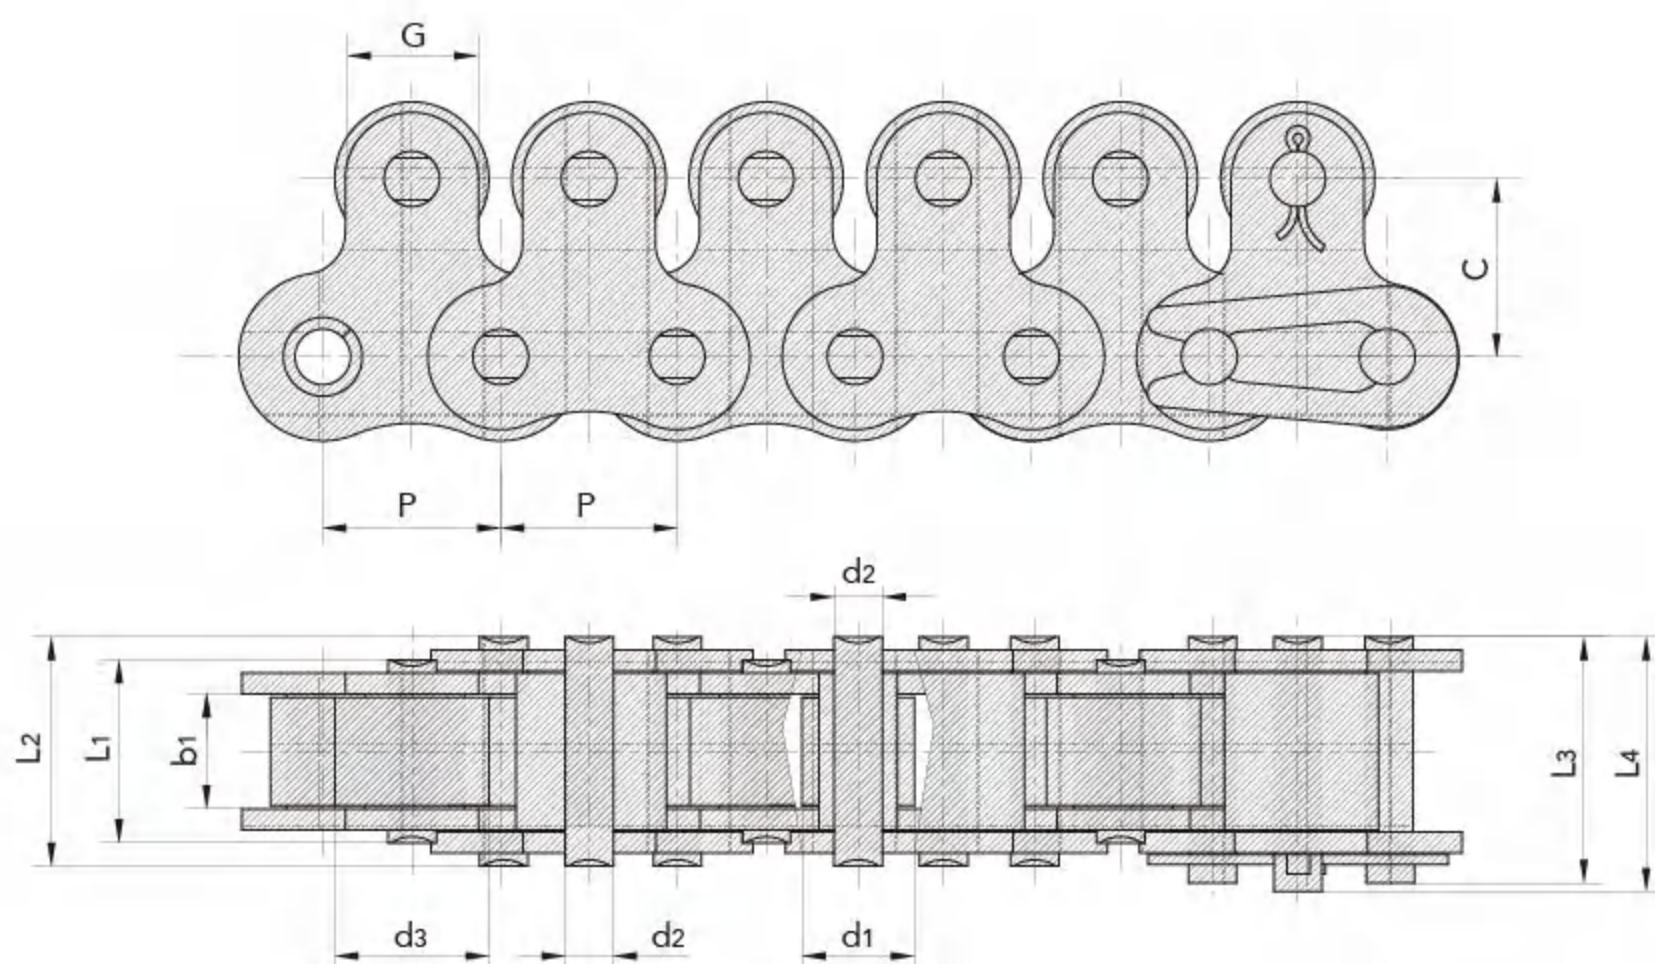

带顶滚轮短节距输送链 Short pitch conveyor chain with top rollers

带顶滚轮短节距输送链 Short pitch conveyor chain with top rollers


链号	节距	滚子直径		内节内宽	销轴直径	销轴长度				附板尺寸		抗拉强度	每米长重
	Pitch	Roller diameter		Width between inner plates	Pin diameter	Pin length				Attachment dimension		Tensile strength	Weight per meter
Chain No.	P	d ₁ max	d ₈ max	b ₁ min	d ₂ max	L _{max}	L ₂ max	L ₃ max	L ₄ max	C	d ₃	Q _{min}	q
	mm	mm	mm	mm	mm	mm	mm	mm	mm	mm	mm	kN/lbf	kg/m
C2040-1TR	25.40	7.95	15.88	7.85	3.96	13.50	16.6	17.8	18.8	12.7	3.96	14.1/3205	1.31
C2050-1TR	31.75	10.16	19.05	9.40	5.08	16.50	20.7	22.2	23.3	15.9	5.08	22.2/5045	2.03
C2060-1TR	38.10	11.91	22.23	12.57	5.94	20.70	25.9	27.5	27.5	23.0	5.94	31.8/7227	2.89
C2080-1TR	50.80	15.88	28.58	15.75	7.92	26.20	32.7	35.0	36.5	29.0	11.50	56.7/12886	4.54
C2100-1TR	63.50	19.05	39.67	18.90	9.53	32.30	40.4	44.7	44.7	35.4	14.50	88.5/20114	7.72

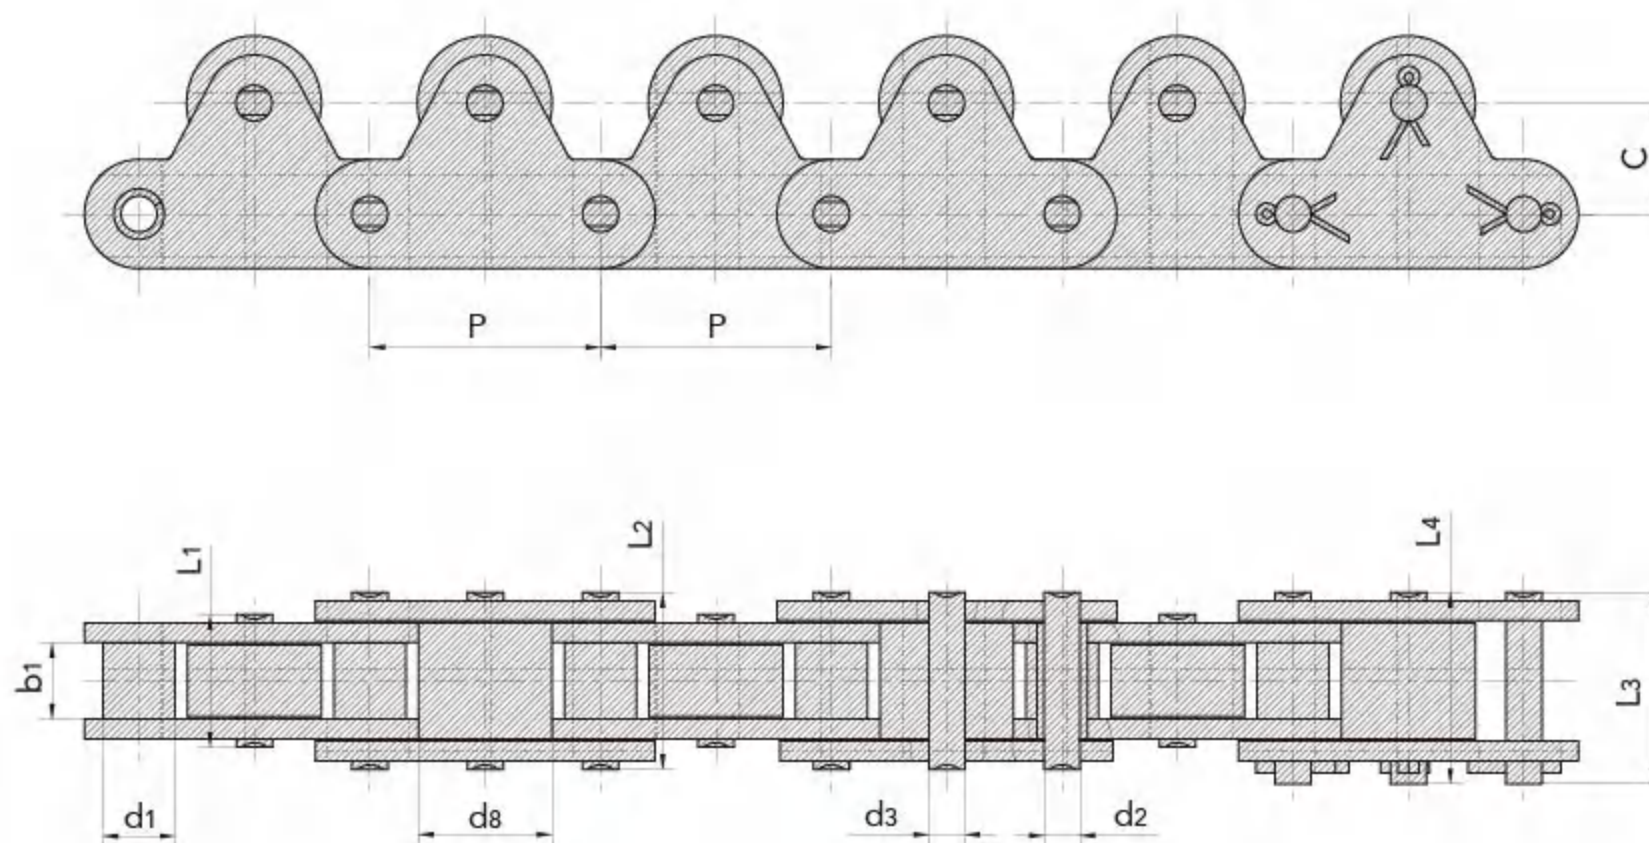

带塑料附板滚子链 Roller chain with plastic attachments


带塑料附板滚子链 Roller chain with plastic attachments

链号	节距 Pitch	滚子直径 Roller diameter	内节内宽 Width between inner plates	销轴直径 Pin diameter	销轴长度 Pin length		链板、附板尺寸 Plate & attachment dimension		抗拉强度 Tensile strength	每米长重 Weight per meter
Chain No.	P	d ₁ max	b ₁ min	d ₂ max	L max	L _c max	h ₂	T	Q _{min}	q
	mm	mm	mm	mm	mm	mm	mm	mm	kN/lbf	kg/m
16BF9	25.4	15.88	17.02	8.28	61.0	64.2	30.0	6.0	22.0/4949	3.7

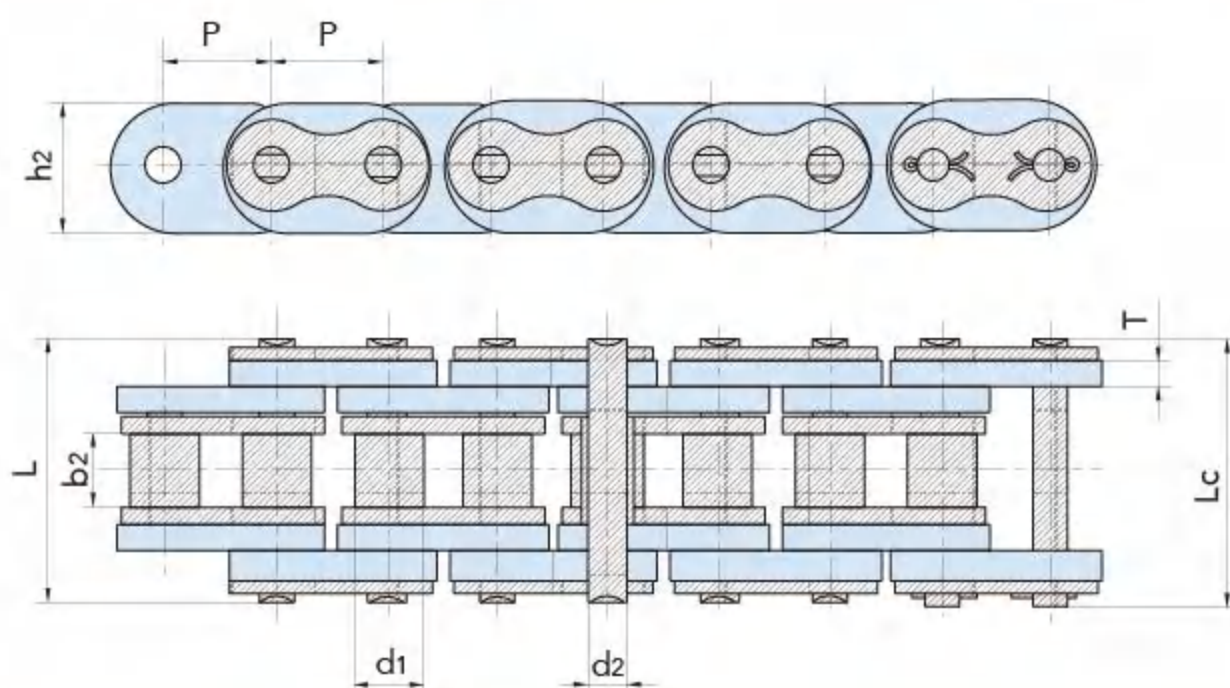

带塑料附板滚子链 Roller chain with plastic attachments

链号	节距 Pitch	滚子直径 Roller diameter	内节内宽 Width between inner plates	销轴直径 Pin diameter	销轴长度 Pin length		链板、附板尺寸 Plate & attachment dimension		抗拉强度 Tensile strength	每米长重 Weight per meter
Chain No.	P	d ₁ max	b ₁ min	d ₂ max	L max		h ₂	T	Q _{min}	q
	mm	mm	mm	mm	mm		mm	mm	kN/lbf	kg/m
20BF6	31.75	19.05	19.56	10.19	73.7		45.0	6.0	95.0/21591	6.35

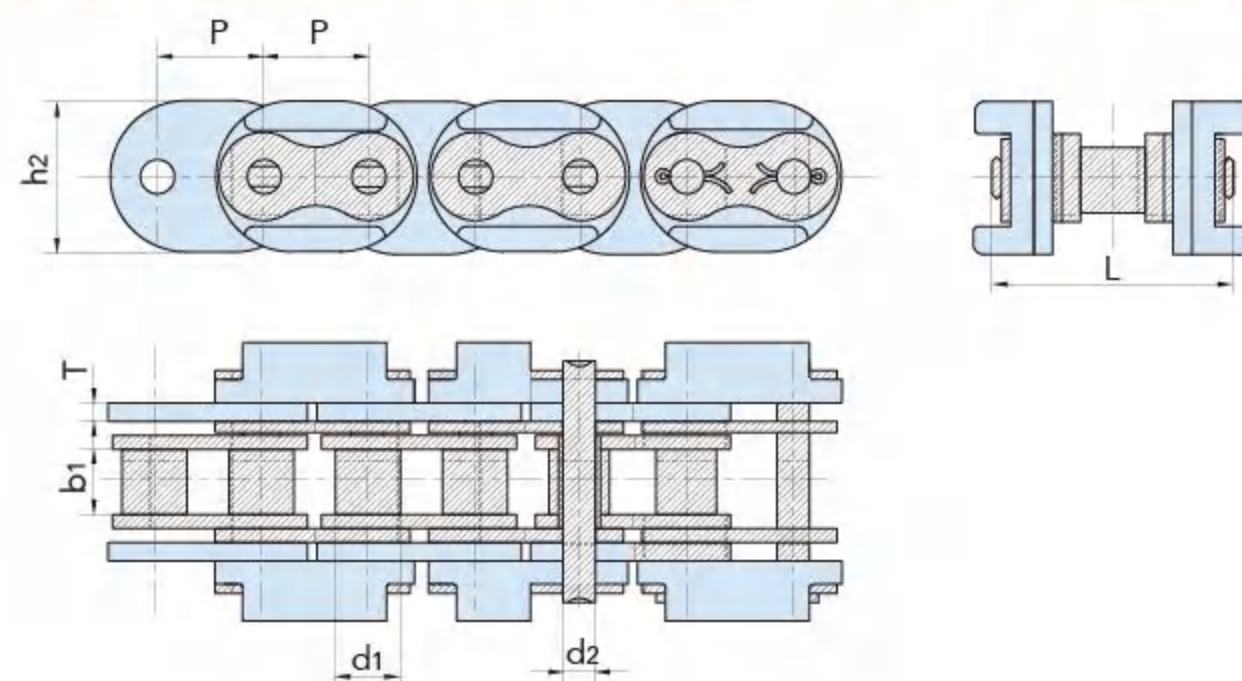


M系列输送链 Conveyor chain (M series)


M系列输送链 Conveyor chain (M series)

链号 ISO	节距 Pitch								滚子直径 Roller diameter			套筒直径 Roller diameter
ISO Chain No.	P								d ₁ max	d ₇ max	d ₅ max	d ₄ max
	mm								mm	mm	mm	mm
M20	*40.0	50.0	63.0	80.0	100.0	125.0	160.0		25.0	12.5	32.0	9.0
M28	*50.0	63.0	80.0	100.0	125.0	160.0	200.0		30.0	15.0	36.0	10.0
M40	63.0	80.0	100.0	125.0	160.0	200.0	250.0		36.0	18.0	42.0	12.5
M56	*63.0	80.0	100.0	125.0	160.0	200.0	250.0		42.0	21.0	50.0	15.0
M80	80.0	100.0	125.0	160.0	200.0	250.0	315.0		50.0	25.0	60.0	18.0
M112	*80.0	100.0	125.0	160.0	200.0	250.0	315.0	400.0	60.0	30.0	70.0	21.0
M160	*100.0	125.0	160.0	200.0	250.0	315.0	400.0	500.0	70.0	36.0	85.0	25.0
M224	*125.0	160.0	200.0	250.0	315.0	400.0	500.0	630.0	85.0	42.0	100.0	30.0
M315	*160.0	200.0	250.0	315.0	400.0	500.0	630.0		100.0	50.0	120.0	36.0
M450	200.0	250.0	315.0	400.0	500.0	630.0	800.0		120.0	60.0	140.0	42.0


1. 无滚子
1. without rollers

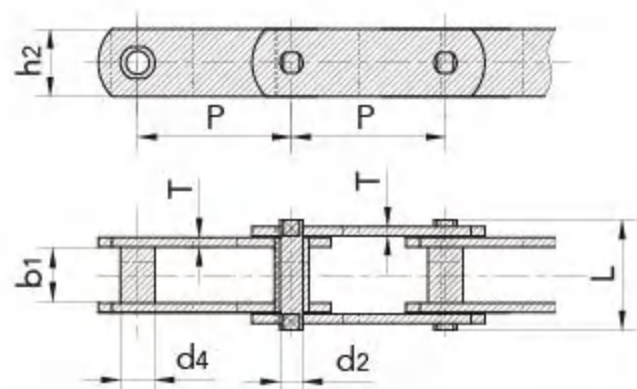


2. 带S型小滚子
2. with S small rollers type

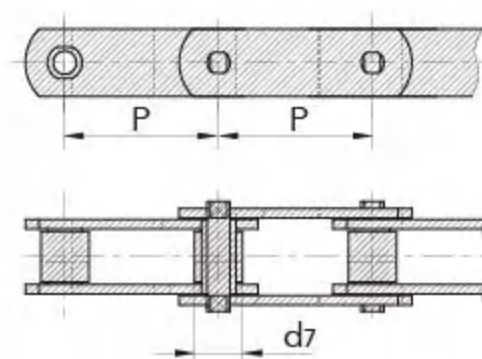

3. 带P型大滚子
3. with P large rollers type

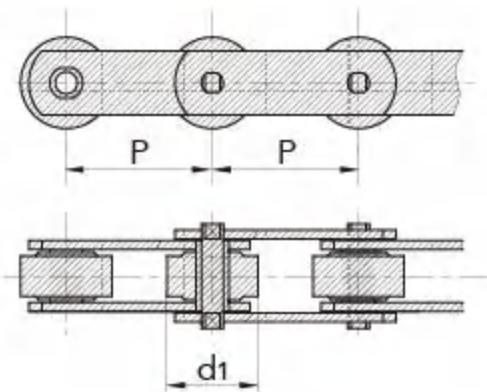

4. 带F型滚子
4. with F flanged rollers type

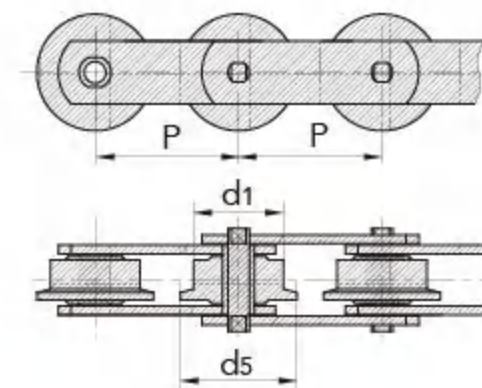

传动链
Driving Chain

曳引链
Hoisting Chain

输送链
Conveyor Chain

不锈钢链
Stainless Steel Chain

农机链
Agricultural Chain


M系列输送链 Conveyor chain (M series)

M系列输送链 Conveyor chain (M series)

链号 ISO	内节内宽 Width between inner plates	销轴直径 Pin diameter	销轴长度 Pin length	链板高度 Plate depth	链板厚度 Plate thickness	极限拉伸载荷 Ultimate tensile strength	平均拉伸载荷 Average tensile strength
ISO Chain No.	b ₁ min	d ₂ max	L max	h ₂ max	T max	Q min	Q ₀
	mm	mm	mm	mm	mm	kN/lbf	kN
M20	16.0	6.0	35.0	19.0	2.5	20.0/4545	25.0
M28	18.0	7.0	40.0	21.0	3.0	28.0/6364	35.0
M40	20.0	8.5	45.0	26.0	3.5	40.0/9091	50.0
M56	24.0	10.0	52.0	31.0	4.0	56.0/12727	70.0
M80	28.0	12.0	62.0	36.0	5.0	80.0/18182	100.0
M112	32.0	15.0	73.0	41.0	6.0	112.0/25454	140.0
M160	37.0	18.0	85.0	51.0	7.0	160.0/36364	200.0
M224	43.0	21.0	98.0	62.0	8.0	224.0/50909	280.0
M315	48.0	25.0	112.0	72.0	10.0	315.0/71591	393.7
M450	56.0	30.0	135.0	82.0	12.0	450.0/102272	562.5

- *链条仅有套筒和小滚子
- *Chain has bush and small roller only

5.销轴铆头后采用焊接加固
5.Welded pins with plates

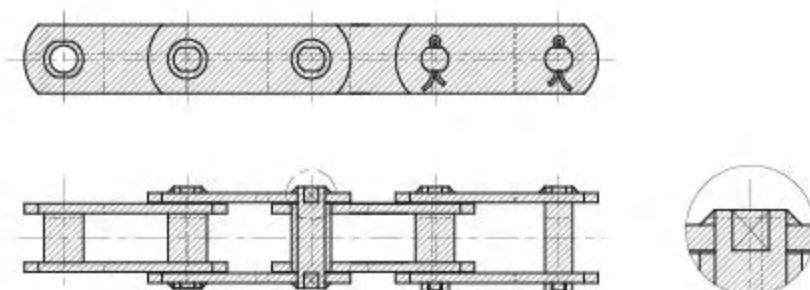


M系列带附板输送链 Conveyor chain with attachments (M series)

M系列带附板输送链 Conveyor chain with attachments (M series)

链号 ISO	P	L	G	d4	F	W	h4
ISO Chain No.	mm	mm	mm	mm	mm	mm	mm
M20	40.0	△	14.0	6.6	27.0	40.0	16.0
	50.0	△	14.0				
	63.0	20.0	35.0				
	80.0	35.0	50.0				
M28	50.0	△	20.0	9.0	32.0	47.0	20.0
	63.0	△	20.0				
	80.0	25.0	45.0				
	100.0	40.0	60.0				
M40	63.0	△	31.0	9.0	35.0	50.0	25.0
	80.0	20.0	45.0				
	100.0	40.0	60.0				
	125.0	65.0	85.0				
M56	63.0	△	22.0	11.0	44.0	61.0	30.0
	80.0	△	30.0				
	100.0	25.0	50.0				
	125.0	50.0	75.0				
M80	160.0	85.0	110.0	11.0	48.0	65.0	35.0
	80.0	△	30.0				
	100.0	25.0	50.0				
	125.0	50.0	75.0				
	200.0	125.0	150.0				

■ △附板带一个孔
■ △Attachments with 1 hole

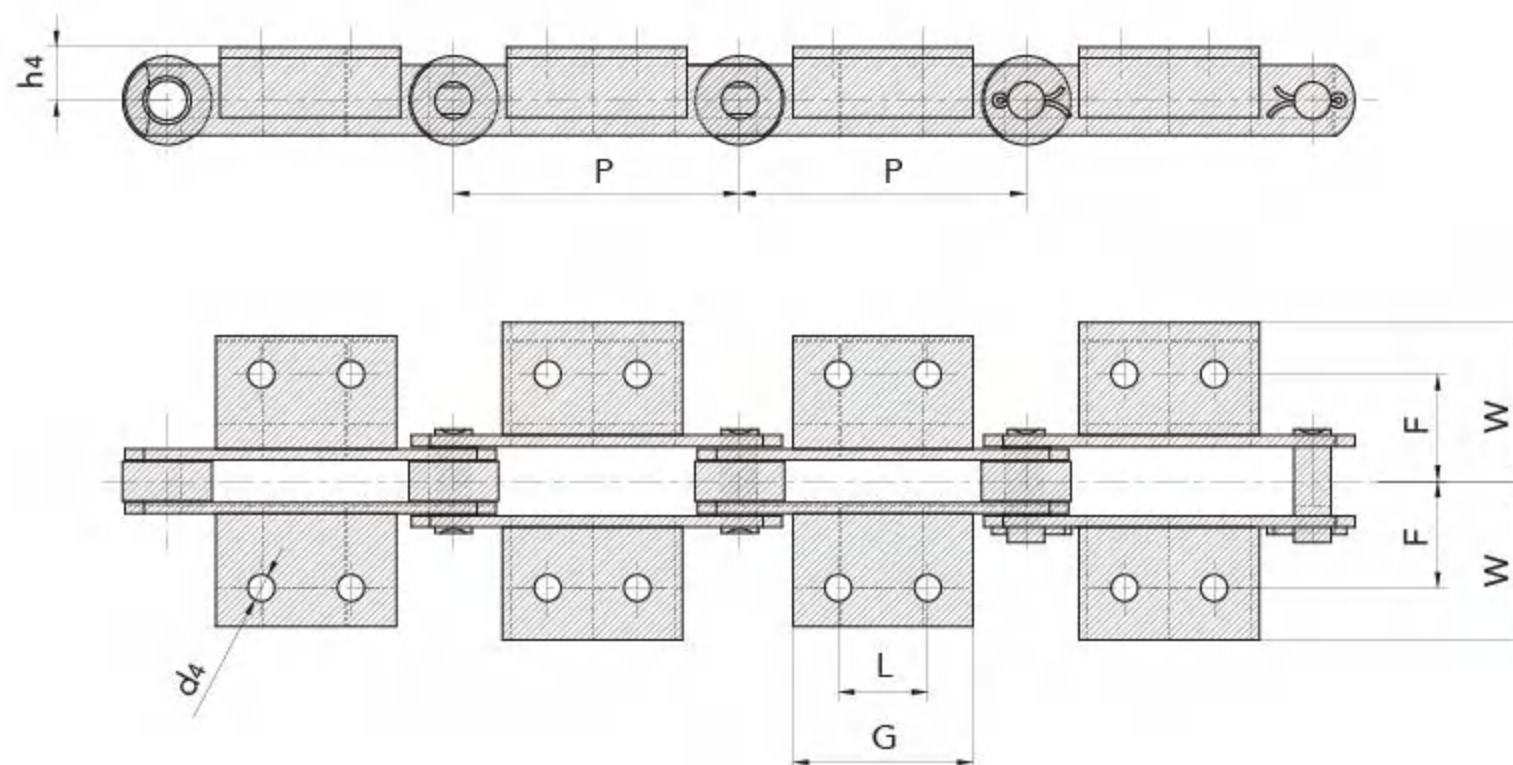



M系列带附板输送链 Conveyor chain with attachments (M series)

M系列带附板输送链 Conveyor chain with attachments (M series)

链号 ISO	P	L	G	d4	F	W	h4
ISO Chain No.	mm	mm	mm	mm	mm	mm	mm
M112	80.0	△	28.0	14.0	55.0	80.0	40.0
	100.0	△	40.0				
	125.0	35.0	65.0				
	160.0	65.0	95.0				
	200.0	100.0	130.0				
M160	100.0	△	30.0	14.0	62.0	85.0	45.0
	125.0	25.0	50.0				
	160.0	50.0	80.0				
	200.0	85.0	115.0				
	250.0	145.0	175.0				
M224	125.0	△	35.0	18.0	70.0	110.0	55.0
	160.0	△	60.0				
	200.0	65.0	100.0				
	250.0	125.0	160.0				
	315.0	190.0	230.0				
M315	160.0	△	35.0	18.0	80.0	115.0	65.0
	200.0	50.0	85.0				
	250.0	100.0	140.0				
	315.0	155.0	190.0				
	400.0	155.0	205.0				

■ △附板带一个孔

■ △Attachments with 1 hole

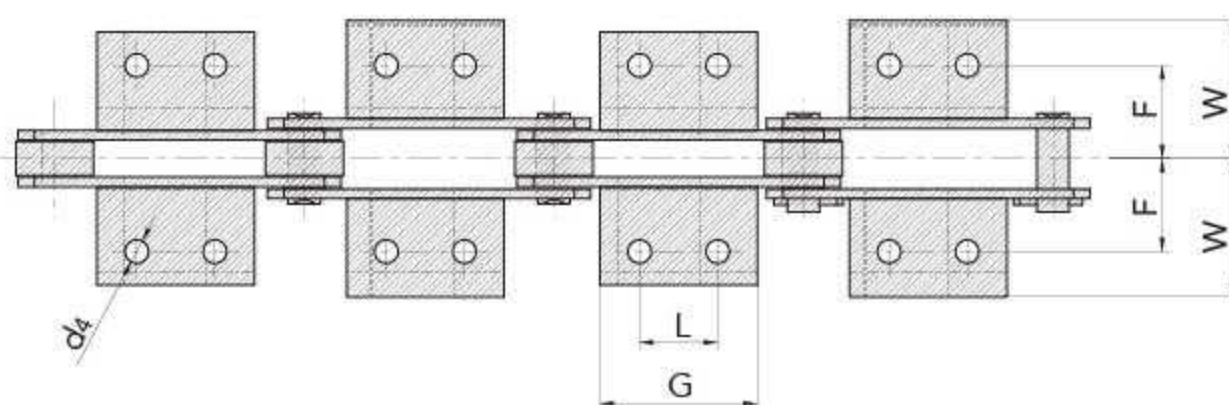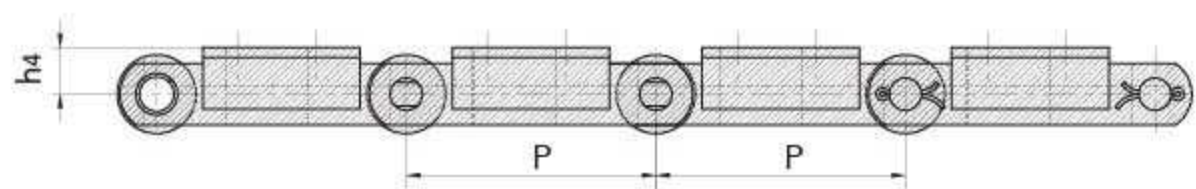

FV系列输送链 Conveyor chain (FV series)

FV系列输送链 Conveyor chain (FV series)

链号 DIN	节距 Pitch							滚子直径 Roller diameter					套筒直径 Roller diameter
DIN Chain No.	P							d ₁ max	d ₄ max	d ₅ max	d ₆ max	G	d ₃ max
	mm							mm	mm	mm	mm	mm	mm
FV40	50.0	63.0	80.0	100.0	125.0	-	-	32.0	20.0	40.0	50.0	4.0	15.0
FV63	50.0	63.0	80.0	100.0	125.0	160.0	-	40.0	26.0	50.0	63.0	5.0	18.0
FV90	63.0	80.0	100.0	125.0	160.0	200.0	250.0	48.0	30.0	63.0	78.0	6.5	20.0
FV112	80.0	100.0	125.0	160.0	200.0	250.0	-	55.0	32.0	72.0	90.0	7.5	22.0
FV140	63.0	100.0	125.0	160.0	200.0	250.0	-	60.0	36.0	80.0	100.0	9.0	26.0
FV180	100.0	125.0	160.0	200.0	250.0	315.0	-	70.0	42.0	100.0	125.0	13.0	30.0
FV250	125.0	160.0	200.0	250.0	315.0	400.0	-	80.0	50.0	125.0	155.0	15.0	36.0
FV315	160.0	200.0	250.0	315.0	400.0	-	-	90.0	60.0	140.0	175.0	18.0	42.0


传动链
Driving Chain

或引链
Hoisting Chain

输送链
Conveyor Chain

不锈钢链
Stainless Steel Chain

农机链
Agricultural Chain

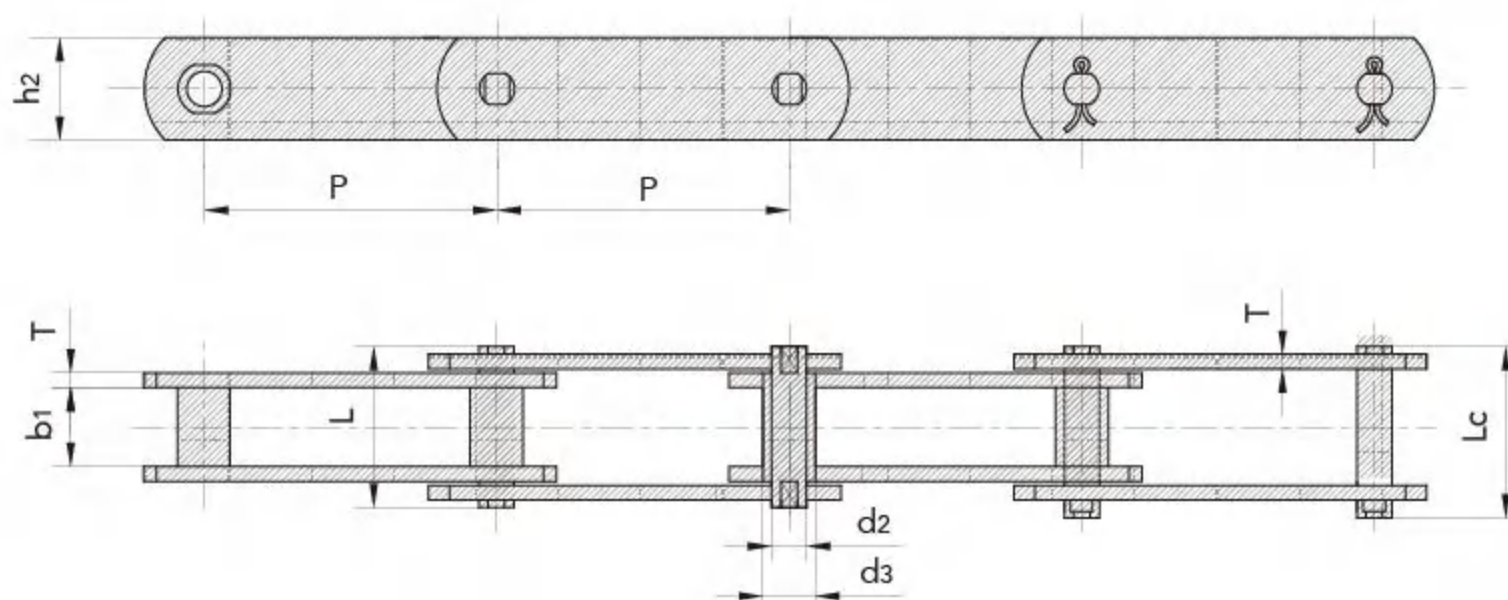

FV系列输送链 Conveyor chain (FV series)


FV系列输送链 Conveyor chain (FV series)

链号 DIN	内节内宽 Width between inner plates	销轴直径 Pin diameter	销轴长度 Pin length		链板高度 Plate depth	链板厚度 Plate thickness	极限拉伸载荷 Ultimate tensile strength	
DIN Chain No.	b ₁ min	d ₂ max	L _{min}	L _c max	h ₂ max	T max	Q min	*Q min
	mm	mm	mm	mm	mm	mm	kN/lbf	kN/lbf
FV40	18.0	10.0	36.0	39.0	25.0	3.0	40.0/9091	47.0/10681
FV63	22.0	12.0	45.0	48.5	30.0	4.0	63.0/14317	75.0/17045
FV90	25.0	14.0	53.0	56.5	35.0	5.0	90.0/20453	115.0/26136
FV112	30.0	16.0	62.0	66.0	40.0	6.0	112.0/25452	170.0/38636
FV140	35.0	18.0	67.0	71.5	45.0	6.0	140.0/31815	180.0/40908
FV180	45.0	20.0	86.0	92.0	50.0	8.0	180.0/40908	250.0/56817
FV250	55.0	26.0	97.0	103.5	60.0	8.0	250.0/56817	300.0/68181
FV315	65.0	30.0	113.0	126.5	70.0	10.0	315.0/71591	480.0/109089


■*Q 表示热处理后的极限拉伸载荷

■*Q denotes the ultimate tensile strength after hardened


无滚子
without rollers

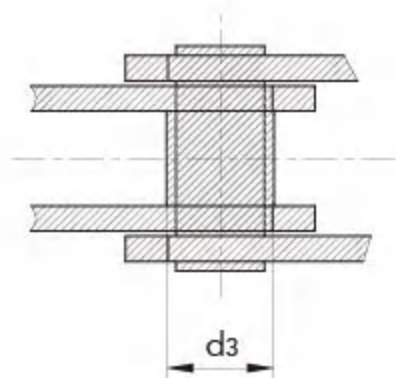


带S型小滚子
with S small rollers type

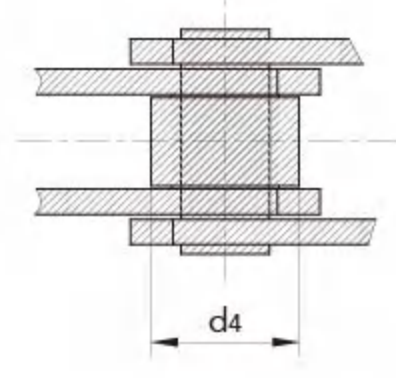

带P型大滚子
with P large rollers type

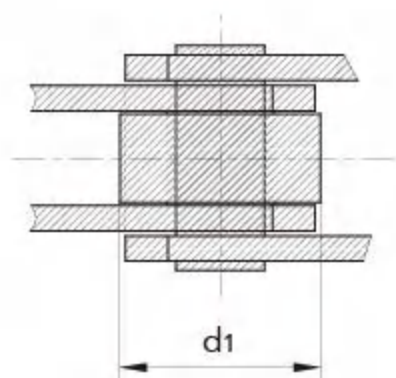

带F型滚子
with F flanged rollers type

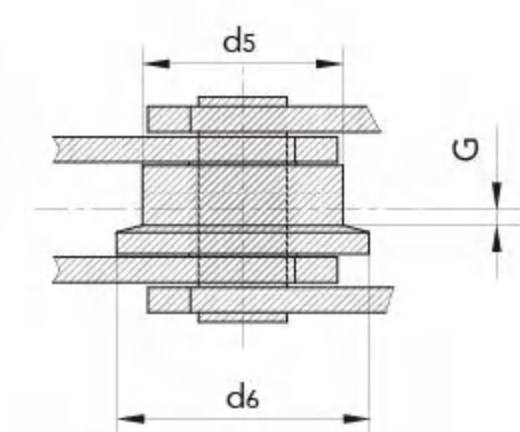


FV系列带附板输送链 Conveyor chain with attachments (FV series)

FV系列带附板输送链 Conveyor chain with attachments (FV series)

链号 ISO	P	L	G	d4	F	W	h4
ISO Chain No.	mm	mm	mm	mm	mm	mm	mm
FV40	50.0	△	45.0	6.5	25.0	40.5	20.0
	63.0	△	31.0				
	80.0	25.0	45.0				
	100.0	30.0	50.0				
	125.0	30.0	60.0				
FV63	63.0	△	40.0	8.4	34.0	50.0	30.0
	80.0	25.0	45.0				
	100.0	30.0	50.0				
	125.0	40.0	60.0				
	160.0	50.0	70.0				
FV90	63.0	△	30.0	8.4	40.0	64.0	35.0
	80.0	25.0	45.0				
	100.0	30.0	50.0				
	125.0	40.0	60.0				
	160.0	50.0	70.0				
	200.0	60.0	80.0				
	250.0	65.0	85.0				
FV112	100.0	30.0	50.0	11.0	50.0	70.0	40.0
	125.0	40.0	65.0				
	160.0	50.0	75.0				
	200.0	65.0	90.0				
	250.0	80.0	105.0				

- △附板带一个孔
- △Attachments with 1 hole

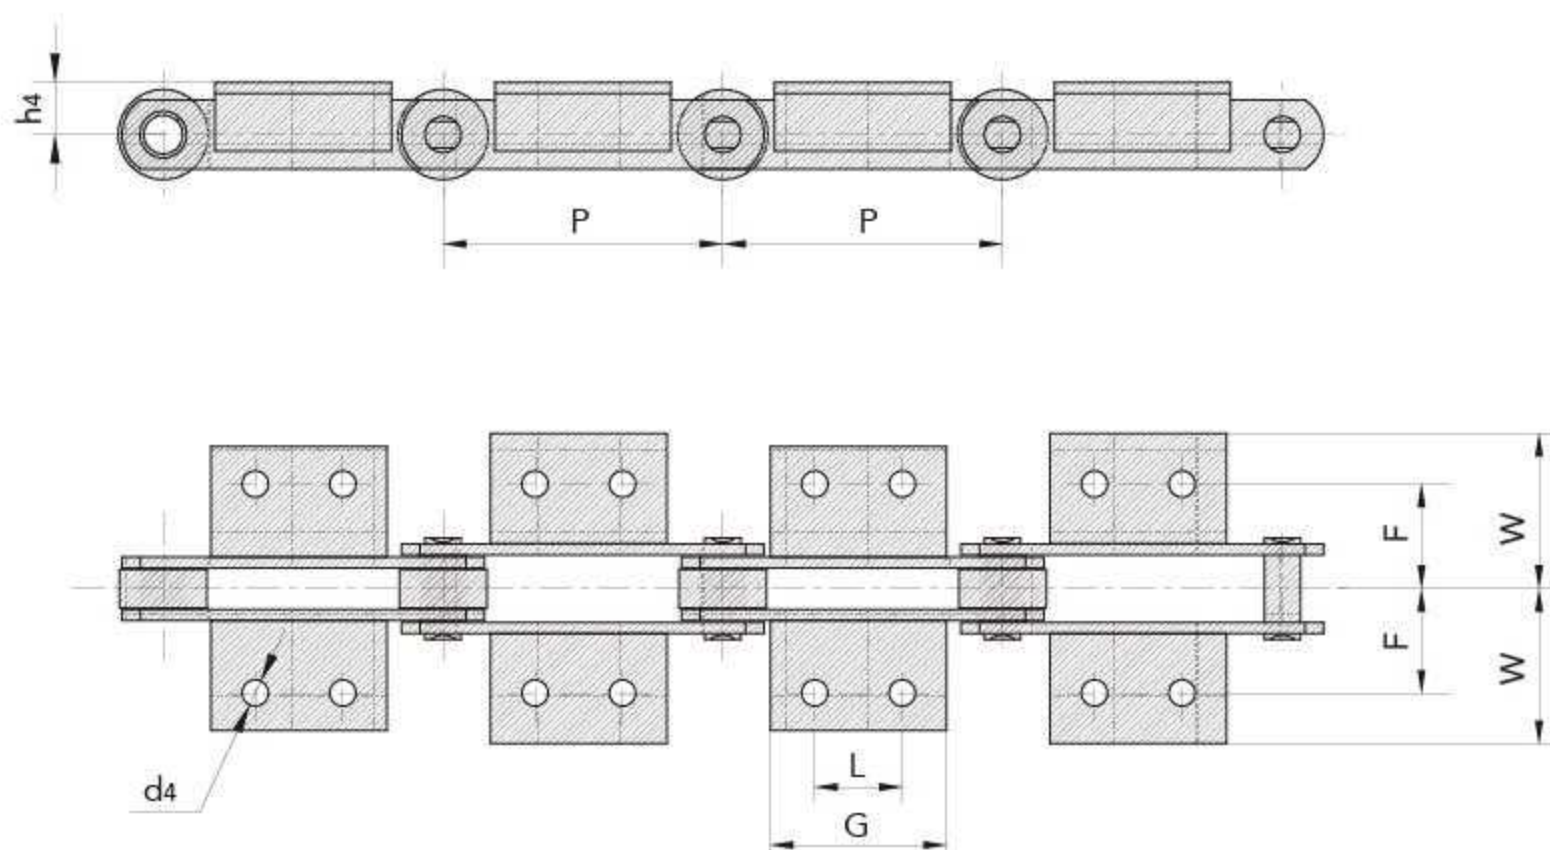

FV系列带附板输送链


Conveyor chain with attachments (FV series)

FV系列带附板输送链 Conveyor chain with attachments (FV series)

链号 ISO	P	L	G	d4	F	W	h4
ISO Chain No.	mm	mm	mm	mm	mm	mm	mm
FV140	100.0	30.0	55.0	11.0	50.0	81.0	45.0
	125.0	40.0	65.0				
	160.0	50.0	75.0				
	200.0	65.0	90.0				
	250.0	80.0	105.0				
FV180	125.0	35.0	63.0	13.0	64.0	91.0	45.0
	160.0	50.0	80.0				
	200.0	65.0	95.0				
	250.0	80.0	110.0				
	315.0	100.0	130.0				
FV250	160.0	50.0	80.0	14.0	69.0	106.0	55.0
	200.0	65.0	95.0				
	250.0	80.0	110.0				
	315.0	100.0	130.0				
	400.0	100.0	130.0				
FV315	160.0	△	50.0	14.0	85.0	130.0	60.0
	200.0	65.0	95.0				
	250.0	80.0	110.0				
	315.0	100.0	130.0				
	400.0	100.0	130.0				

■ △附板带一个孔

■ △Attachments with 1 hole

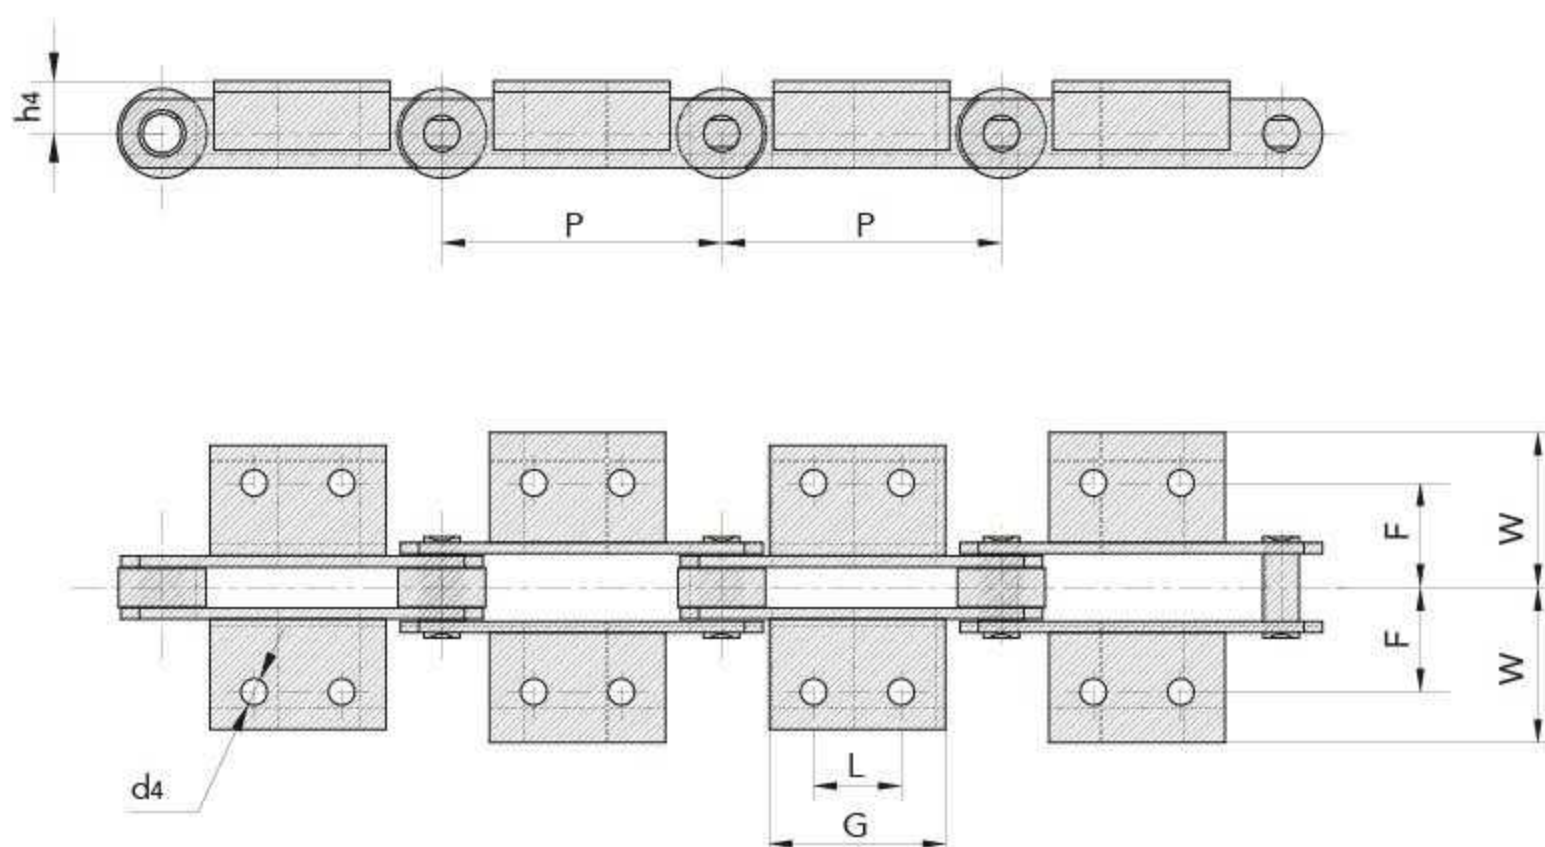

MT系列输送链 Conveyor chain (MT series)

MT系列输送链 Conveyor chain (MT series)



链号 DIN	节距 Pitch					滚子直径 Roller diameter	销轴直径 Pin diameter	套筒直径 Roller diameter	链板厚度 Plate thickness
DIN Chain No.	P					d ₁ max	d ₂ max	d ₃ max	T max
	mm					mm	mm	mm	mm
MT20	40.0	50.0	63.0	80.0	100.0	25.0	6.0	9.0	2.5
MT28	50.0	63.0	80.0	100.0	125.0	30.0	7.0	10.0	3.0
MT40	63.0	80.0	100.0	125.0	160.0	36.0	8.5	12.5	3.5
MT56	63.0	80.0	100.0	125.0	160.0	42.0	10.0	15.0	4.0
MT80	80.0	100.0	125.0	160.0	200.0	50.0	12.0	18.0	5.0
MT112	80.0	100.0	125.0	160.0	200.0	60.0	15.0	21.0	6.0
MT160	100.0	125.0	160.0	200.0	250.0	70.0	18.0	25.0	7.0
MT224	125.0	160.0	200.0	250.0	315.0	85.0	21.0	30.0	8.0
MT315	160.0	200.0	250.0	315.0	400.0	100.0	25.0	36.0	10.0
MT450	200.0	250.0	315.0	400.0	500.0	120.0	30.0	42.0	12.0

MT系列输送链 Conveyor chain (MT series)

链号 DIN	内节内宽 Width between inner plates	销轴长度 Pin length	链板高度 Plate depth		极限拉伸载荷 Ultimate tensile strength	
DIN Chain No.	b ₁ min	L min	h ₂ max	h max	Q min	*Q min
	mm	mm	mm	mm	kN/lbf	kN/lbf
MT20	16.0	35.0	25.0	16.0	20.0/4545	32.0/7270
MT28	18.0	40.0	30.0	20.0	28.0/6364	42.0/9545
MT40	20.0	45.0	35.0	22.5	40.0/9091	60.0/13635
MT56	24.0	52.0	45.0	30.0	56.0/12727	85.0/19318
MT80	28.0	62.0	50.0	32.5	80.0/18182	125.0/28408
MT112	32.0	73.0	60.0	40.0	112.0/25454	175.0/39768
MT160	37.0	85.0	70.0	45.0	160.0/36364	260.0/59090
MT224	43.0	98.0	90.0	60.0	224.0/50909	340.0/77272
MT315	48.0	112.0	100.0	65.0	315.0/71591	520.0/118180
MT450	56.0	135.0	120.0	80.0	450.0/102272	700.0/159089

■*Q 表示热处理后的极限拉伸载荷

■*Q denotes the ultimate tensile strength after hardened

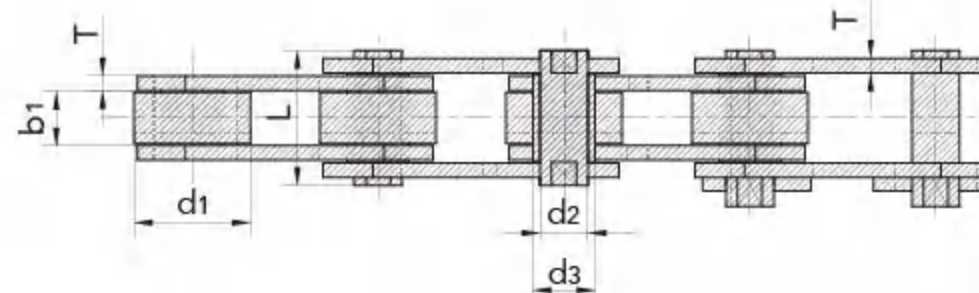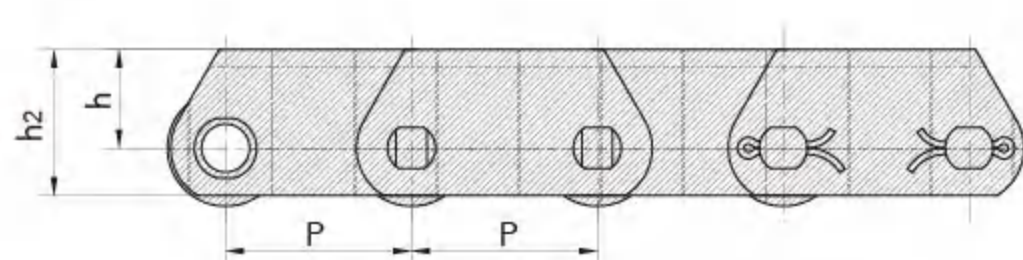

FVT系列输送链 Conveyor chain (FVT series)

FVT系列输送链 Conveyor chain (FVT series)


链号 DIN	节距 Pitch								滚子直径 Roller diameter	销轴直径 Pin diameter	套筒直径 Roller diameter	链板厚度 Plate thickness
DIN Chain No.	P								d ₁ max	d ₂ max	d ₃ max	T max
	mm								mm	mm	mm	mm
FVT40	50.0	63.0	80.0	100.0	125.0	-	-	-	32.0	10.0	15.0	3.0
FVT63	63.0	80.0	100.0	125.0	160.0	-	-	-	40.0	12.0	18.0	4.0
FVT90	63.0	80.0	100.0	125.0	160.0	200.0	250.0	-	48.0	14.0	20.0	5.0
FVT112	100.0	125.0	160.0	200.0	250.0	-	-	-	55.0	16.0	22.0	6.0
FVT140	100.0	125.0	160.0	200.0	250.0	-	-	-	60.0	18.0	25.0	6.0
FVT180	125.0	160.0	200.0	250.0	315.0	-	-	-	70.0	20.0	30.0	8.0
FVT250	160.0	200.0	250.0	315.0	-	-	-	-	80.0	26.0	36.0	8.0
FVT315	160.0	200.0	250.0	315.0	400.0	-	-	-	90.0	30.0	42.0	10.0

FVT系列输送链 Conveyor chain (FVT series)

链号 DIN	内节内宽 Width between inner plates	销轴长度 Pin length		链板高度 Plate depth		极限拉伸载荷 Ultimate tensile strength	
DIN Chain No.	b ₁ min	L max	L _c max	h ₂ max	h max	Q min	*Q min
	mm	mm	mm	mm	mm	kN/lbf	kN/lbf
FVT40	18.0	36.0	39.0	35.0	22.5	40.0/9091	47.0/10681
FVT63	22.0	45.0	48.5	40.0	25.0	63.0/14317	75.0/17045
FVT90	25.0	53.0	56.5	45.0	27.5	90.0/20453	115.0/26136
FVT112	30.0	62.0	66.0	50.0	30.0	112.0/25452	170.0/38636
FVT140	35.0	67.0	71.5	60.0	37.5	140.0/31815	180.0/40908
FVT180	45.0	86.0	92.0	70.0	45.0	180.0/40908	250.0/56817
FVT250	55.0	97.0	103.5	80.0	50.0	250.0/56817	300.0/68181
FVT315	65.0	113.0	126.5	90.0	55.0	315.0/71591	480.0/109089

■*Q 表示热处理后的极限拉伸载荷

■*Q denotes the ultimate tensile strength after hardened

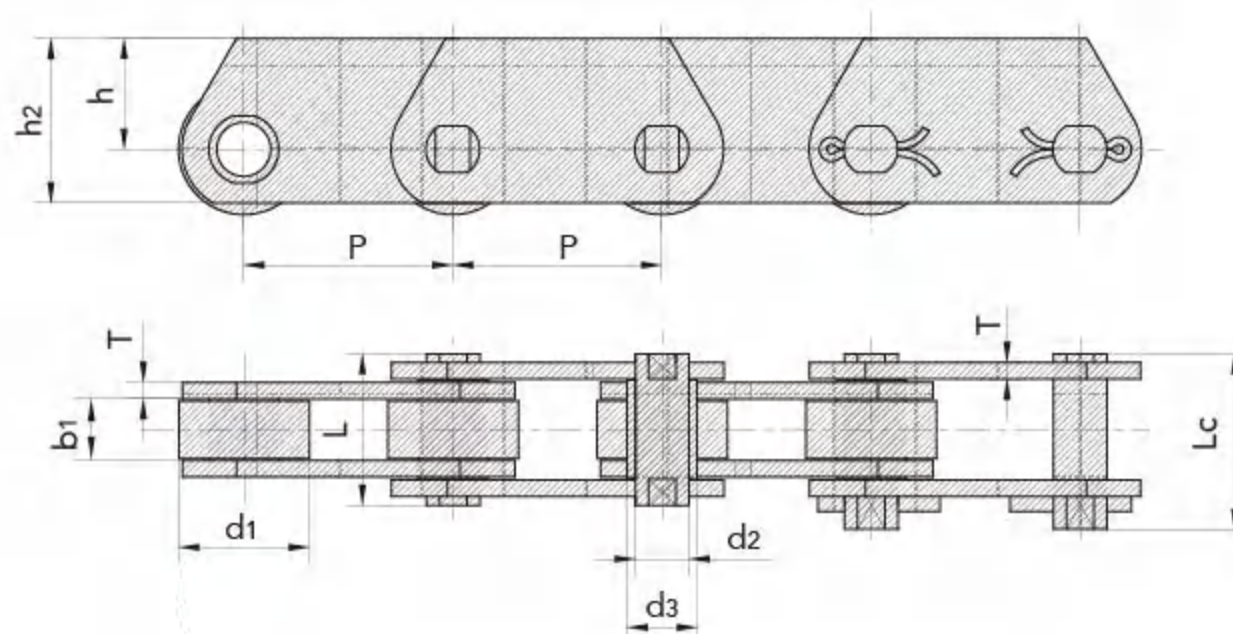

MC系列空心销轴输送链 Hollow pin conveyor chain (MC series)

MC系列空心销轴输送链 Hollow pin conveyor chain (MC series)

链号 DIN	节距 Pitch						滚子直径 Roller diameter				套筒直径 Roller diameter	链板高度 Plate depth
DIN Chain No.	P						d1 max	d7 max	d5 max	b11	d4 max	h2 max
	mm						mm	mm	mm	mm	mm	mm
MC28	63.0	80.0	100.0	125.0	160.0	-	36.0	25.0	45.0	4.5	17.5	25.0
MC56	80.0	100.0	125.0	160.0	200.0	250.0	50.0	30.0	60.0	5.0	21.0	35.0
MC112	100.0	125.0	160.0	200.0	250.0	315.0	70.0	42.0	85.0	7.0	29.0	50.0
MC224	160.0	200.0	250.0	315.0	400.0	500.0	100.0	60.0	120.0	10.0	41.0	70.0


MC系列空心销轴输送链 Hollow pin conveyor chain (MC series)

链号 DIN	内节内宽 Width between inner plates	销轴直径 Pin diameter		销轴长度 Pin length		链板厚度 Plate thickness	破断载荷 Breaking load	
DIN Chain No.	b1 min	d2 max	d3 min	L max	Lc max	T max	Q min	*Q min
	mm	mm	mm	mm	mm	mm	kN/lbf	kN/lbf
MC28	20.0	13.0	8.2	36.0	38.5	3.5	28.0/6364	40.0/9091
MC56	24.0	15.5	10.2	45.0	47.5	4.0	56.0/12727	90.0/20454
MC112	32.0	22.0	14.3	62.5	64.3	6.0	112.0/25454	180.0/40908
MC224	43.0	31.0	20.3	83.0	85.5	8.0	224.0/50909	350.0/79544


■*Q 表示热处理后的极限拉伸载荷

■*Q denotes the ultimate tensile strength after hardened


无滚子
without rollers





带S型小滚子
with S small rollers type



带P型大滚子
with P large rollers type



带F型滚子
with F flanged rollers type

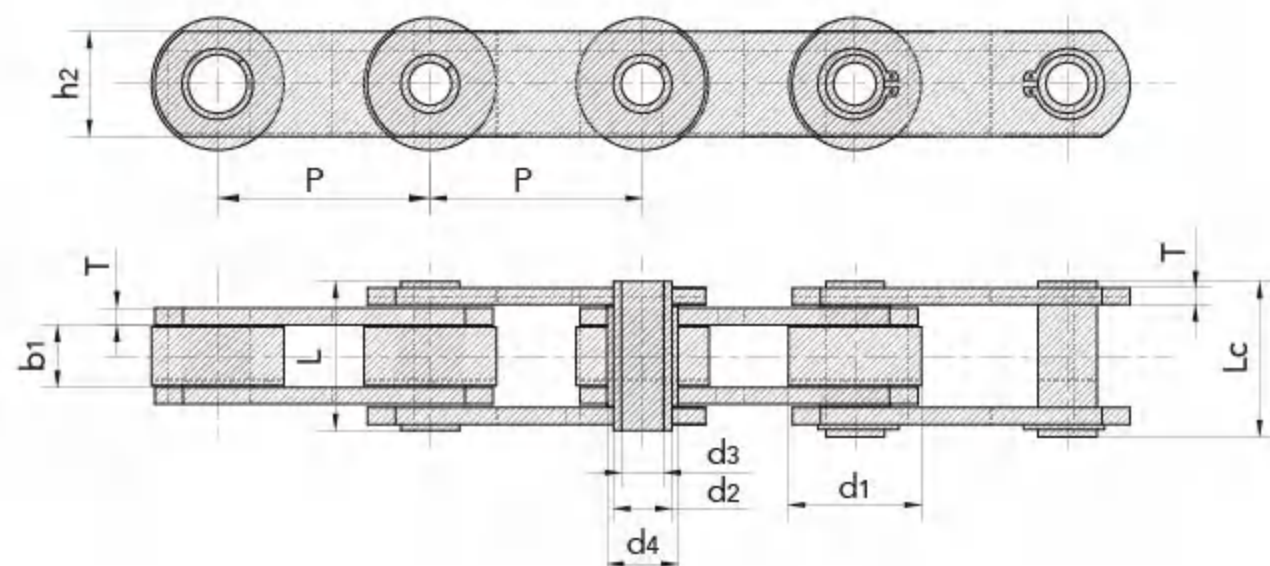


FVC系列空心销轴输送链 Hollow pin conveyor chain (FVC series)

FVC系列空心销轴输送链 Hollow pin conveyor chain (FVC series)


链号 DIN	节距 Pitch								滚子尺寸 Roller dimension					内节内宽 Width between inner plates
DIN Chain No.	P								d ₁ max	d ₄ max	d ₆ max	d ₇ max	G	b ₁ min
	mm								mm	mm	mm	mm	mm	mm
FVC63	63.0	80.0	100.0	125.0	160.0	-	-	-	40.0	26.0	50.0	63.0	5.0	22.0
FVC90	63.0	80.0	100.0	125.0	160.0	200.0	250.0	-	48.0	30.0	63.0	78.0	6.5	25.0
FVC112	100.0	125.0	160.0	200.0	250.0	-	-	-	55.0	32.0	72.0	90.0	7.5	30.0
FVC140	100.0	125.0	160.0	200.0	250.0	-	-	-	60.0	36.0	80.0	100.0	9.0	35.0
FVC180	125.0	160.0	200.0	250.0	315.0	-	-	-	70.0	42.0	100.0	125.0	13.0	45.0
FVC250	160.0	200.0	250.0	315.0	400.0	-	-	-	80.0	50.0	125.0	155.0	15.0	55.0
FVC315	160.0	200.0	250.0	315.0	400.0	-	-	-	90.0	60.0	140.0	175.0	18.0	65.0

FVC系列空心销轴输送链 Hollow pin conveyor chain (FVC series)


链号 DIN	销轴直径 Pin diameter		套筒直径 Bush diameter	销轴长度 Pin length		链板厚度 Plate thickness	链板高度 Plate depth	极限拉伸载荷 Ultimate tensile strength
DIN Chain No.	d ₂ max	d ₃ min	d ₅ max	L max	L _c max	T max	h ₂ max	Q min
	mm	mm	mm	mm	mm	mm	mm	kN/lbf
FVC63	12.0	8.0	18.0	45.0	50.5	4.0	30.0	46.0/10454
FVC90	14.0	10.0	20.0	53.0	56.5	5.0	35.0	73.0/16590
FVC112	16.0	11.0	22.0	62.0	63.0	6.0	40.0	90.0/20454
FVC140	18.0	12.0	26.0	67.0	68.5	6.0	45.0	110.0/25000
FVC180	20.0	14.0	30.0	86.0	88.0	8.0	50.0	145.0/32954
FVC250	26.0	18.0	36.0	97.0	103.5	8.0	60.0	215.0/48863
FVC315	30.0	20.0	42.0	117.0	121.5	10.0	70.0	295.0/67044

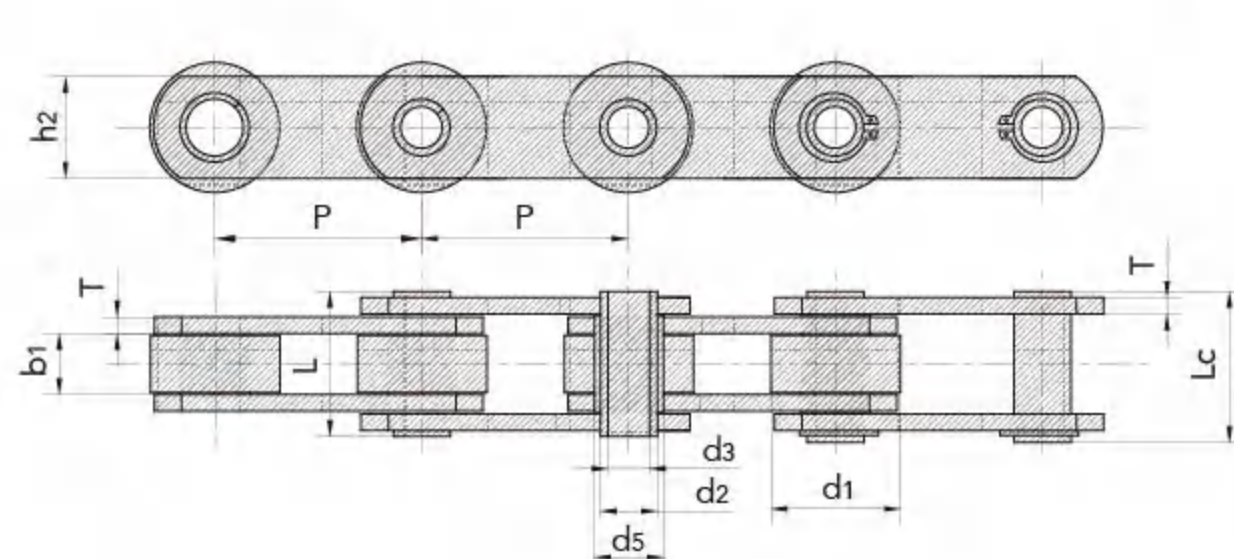


无滚子
without rollers




带S型小滚子
with S small rollers type



带P型大滚子
with P large rollers type



带F型滚子
with F flanged rollers type



ZC系列空心销轴输送链 Hollow pin conveyor chain (ZC series)

ZC系列空心销轴输送链 Hollow pin conveyor chain (ZC series)


链号	节距							滚子尺寸			套筒直径	链板高度
	Pitch							Roller dimension			Bush diameter	Plate depth
Chain No.	P							d1 max	d4 max	G	d5 max	h2 max
	mm							mm	mm	mm	mm	mm
ZC21	38.1	50.8	63.5	76.2	-	-	-	25.40	-	-	11.0	18.0
ZC40	50.8	63.5	76.2	88.9	101.6	127.0	152.4	31.75	40.0	2.5	17.0	25.0
ZC60	76.2	88.9	101.6	127.0	152.4	177.8	203.2	47.50	60.0	3.5	23.0	40.0
ZC150	101.6	127.0	152.4	177.8	203.2	228.6	254.0	66.70	82.0	4.0	33.0	50.0
ZC300	152.4	177.8	203.2	254.0	304.8	-	-	88.90	114.0	8.5	38.0	60.0

ZC系列空心销轴输送链 Hollow pin conveyor chain (ZC series)

链号	内节内宽	销轴直径		销轴长度		链板厚度	破断载荷	
	Width between inner plates	Pin diameter		Pin length		Plate thickness	Breaking load	
Chain No.	b1 min	d2 max	d3 min	L max	Lc max	t/T max	Q min	*Q min
	mm	mm	mm	mm	mm	mm	kN/lbf	kN/lbf
ZC21	12.7	9.0	6.5	26.0	27.5	2.5	21.0/4772	27.1/6159
ZC40	15.0	14.0	10.2	36.4	37.7	4.0	40.0/9091	50.0/11362
ZC60	19.0	19.0	13.2	45.0	46.5	5.0/4.0	60.0/13636	120.0/27270
ZC150	26.0	26.9	20.2	58.0	60.5	7.0/5.0	150.0/34087	190.0/43177
ZC300	38.0	32.0	22.5	83.0	85.0	10.0/8.0	300.0/68175	380.0/86362

■*Q 表示热处理后的极限拉伸载荷

■*Q denotes the ultimate tensile strength after hardened

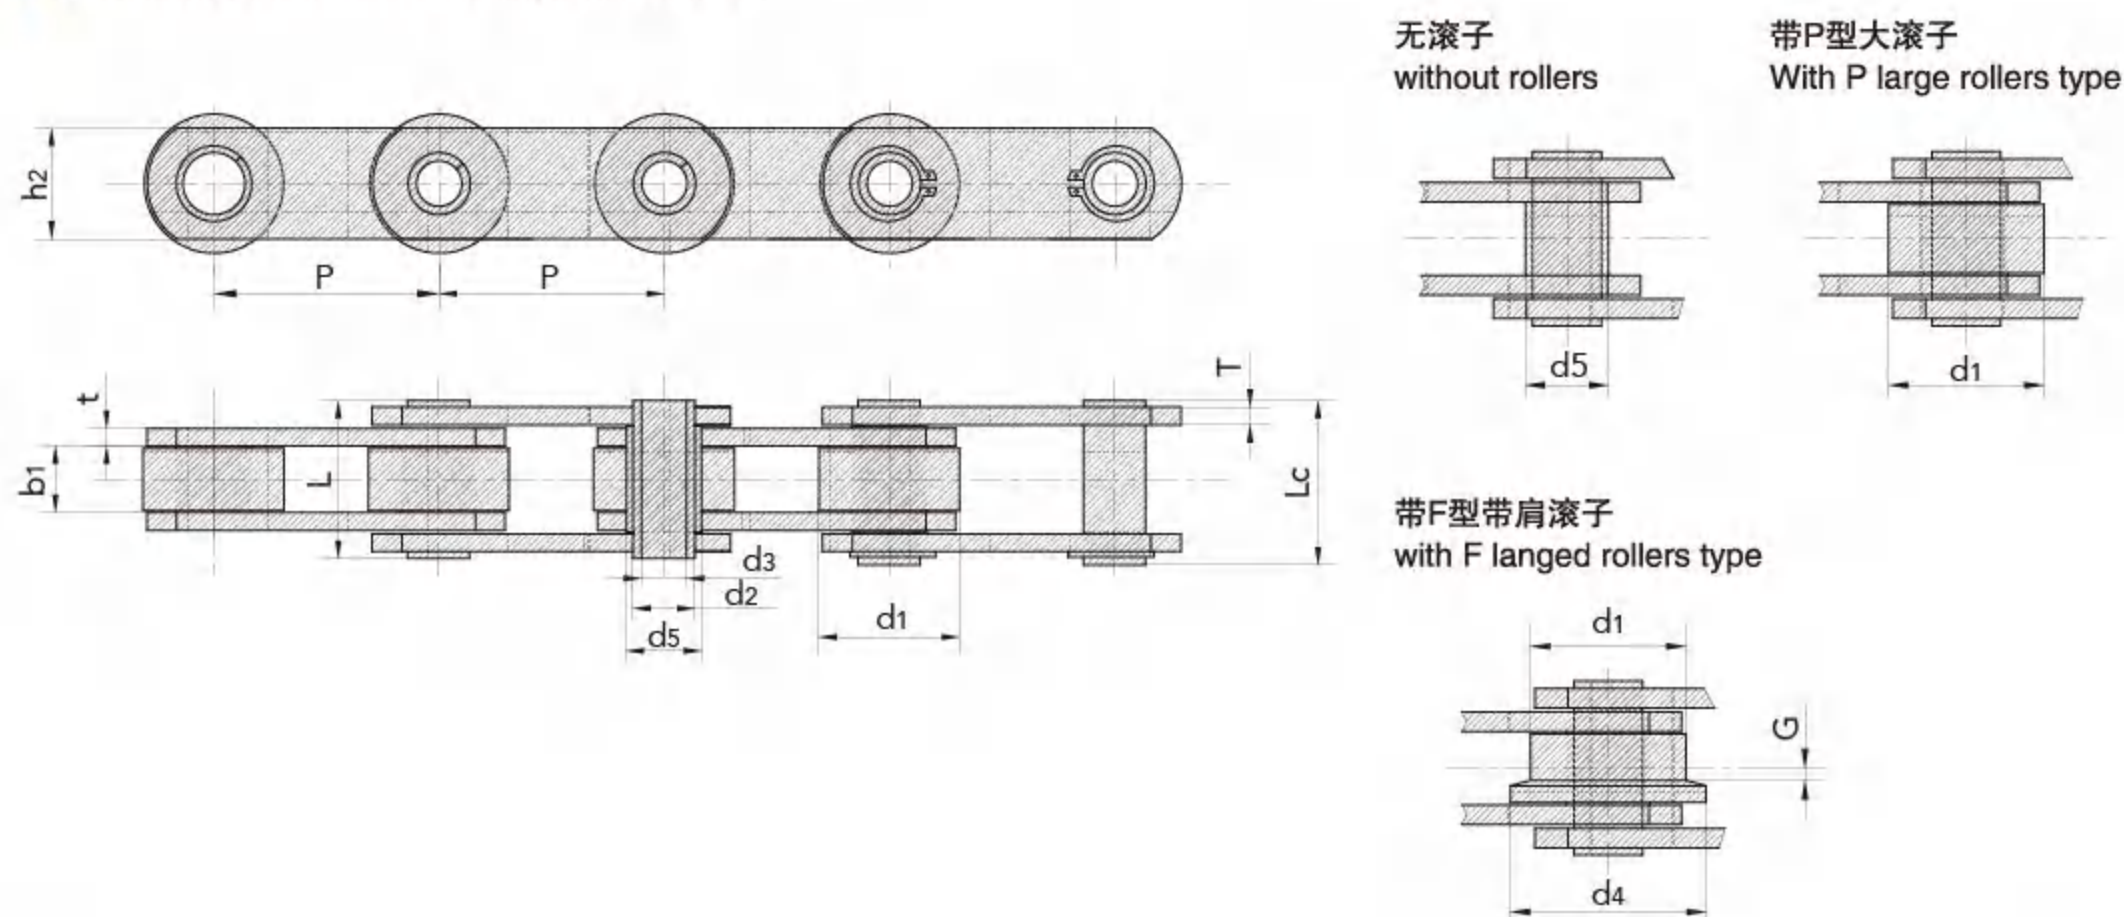


空心销轴链 Hollow pin chain

空心销轴链 Hollow pin chain

链号	节距	滚子直径	内节内宽	销轴直径		销轴长度		内链板高度	链板厚度	极限拉伸载荷	平均拉伸载荷	每米长重
	Pitch	Roller diameter	Width between inner plates	Pin diameter		Pin length		Inner plate depth	Plate thickness	Ultimate tensile strength	Average tensile strength	Weight per meter
Chain No.	P	d ₁ max	b ₁ min	d ₂ max	d ₃ min	L max	L _c max	h ₂ max	T max	Q min	Q ₀	q
	mm	mm	mm	mm	mm	mm	mm	mm	mm	kN/lbf	kN	kg/m
08BHPF	12.700	8.51	7.75	6.55	4.50	16.4	17.6	11.80	1.60/1.30	11.1/2523	12.10	0.56
08BHPF5	12.700	8.51	7.75	6.30	4.50	16.8	18.0	12.00	1.60	9.6/2182	10.60	0.62
10BHPF3	15.875	10.16	9.65	7.02	5.13	19.5	20.5	14.70	1.70	10.0/2272	11.50	0.86
10BHPF4	15.875	10.16	9.50	7.20	5.00	19.8	21.3	14.00	2.03/1.60	12.5/2840	14.00	0.82
12BHPF2	19.050	12.07	11.68	8.09	6.00	22.7	23.9	16.10	1.85	14.0/3180	16.00	0.82
12BHPF3	19.050	12.07	11.70	8.22	5.75	23.6	24.9	16.20	2.42/1.85	16.0/3636	18.00	1.14
40HP	12.700	7.95	7.85	5.63	4.00	16.5	17.6	12.00	1.50	11.0/2500	12.20	0.54
08BHP	12.700	8.51	7.75	6.55	4.50	16.4	17.6	11.80	1.30	11.1/2523	12.10	0.52
50HP	15.875	10.16	9.40	7.03	5.13	20.7	21.9	15.09	2.03	20.0/4545	22.60	0.91
50H-HP	15.875	10.16	9.40	7.03	5.13	22.6	23.7	15.09	2.42	20.0/4545	22.60	1.02
60HP	19.050	11.91	12.70	8.31	6.00	25.8	26.8	18.00	2.42	24.0/5455	26.90	1.29
60HPF1	19.050	11.91	12.70	8.31	5.01	25.5	26.8	18.00	2.42	28.0/6364	30.90	1.37
80HP	25.400	15.88	15.75	11.40	8.05	32.5	33.8	24.00	3.25	50.0/11364	52.00	2.26
80HPF2	25.400	15.88	15.75	11.40	8.40	32.5	33.8	24.00	3.25	45.0/10227	48.00	2.23
80H-HP	25.400	15.88	15.75	11.40	8.05	35.7	37.0	24.00	4.00	50.0/11364	52.00	2.63
A2080HP	50.800	15.88	15.75	11.40	8.05	32.4	33.8	24.00	3.25	42.3/9615	46.10	1.60
10BHB	15.875	10.16	9.65	5.94	4.04	19.30	20.60	14.70	1.70	17.00/3864	20.80	0.86
12BHP	19.050	12.07	11.68	6.50	4.00	21.60	22.80	15.90	1.85	23.60/5364	25.90	1.09
60HB	19.050	11.91	12.70	7.00	5.01	25.50	26.60	18.00	2.42	20.00/4545	22.40	1.35
16BHB1	25.400	15.88	12.70	9.53	7.05	30.80	32.20	23.00	4.15/3.10	40.00/9091	45.00	2.28
HB25.4	25.400	20.00	8.00	8.00	5.20	19.50	20.50	17.00	2.03	25.00/5680	28.00	1.30
HP35	35.000	20.00	16.00	14.00	10.20	30.00	32.40	26.00	2.50	25.00	34.00	2.02
HB35	35.000	20.00	16.00	14.00	10.20	32.00	33.50	38.10	3.00	40.00/9091	45.00	2.39
HB35L	35.000	30.00	16.00	14.00	10.20	30.00	32.40	26.00	2.50	25.00	34.00	3.41

■*外链板为直板形


■*D denotes straight side outer plates

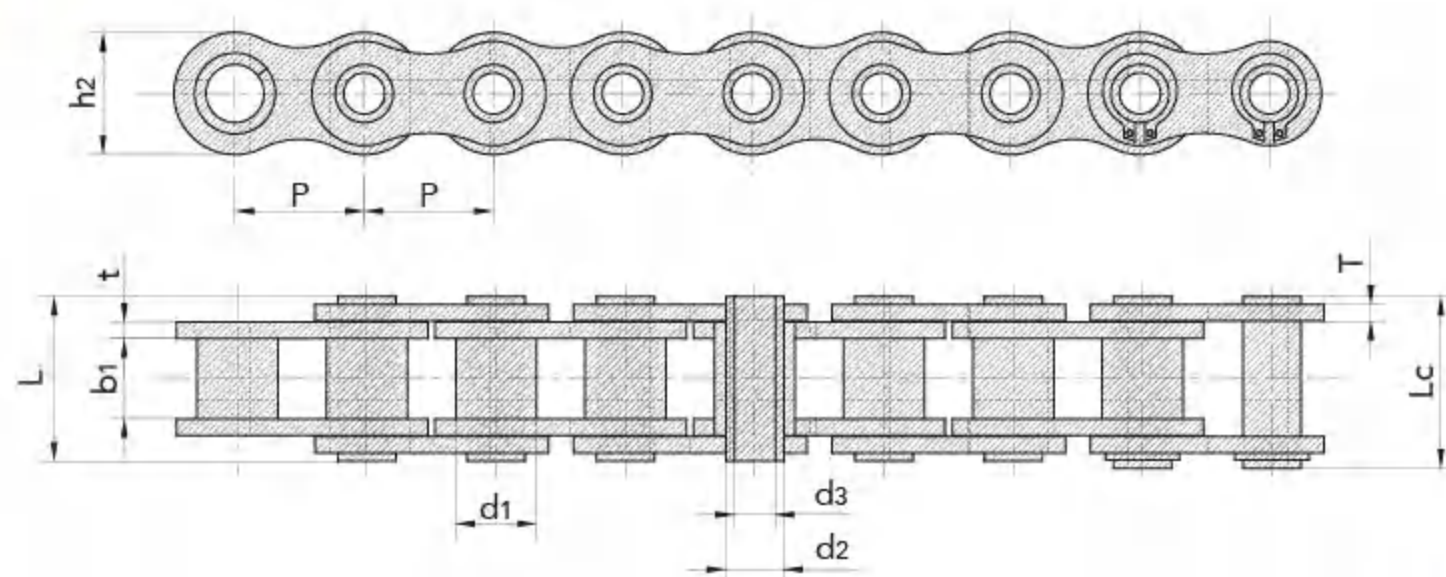

空心销轴链 Hollow pin chain

空心销轴链 Hollow pin chain

链号	节距	套筒直径	内节内宽	销轴直径		销轴长度		内链板高度	链板厚度	极限拉伸载荷	平均拉伸载荷	每米长重
	Pitch	Bush diameter	Width between inner plates	Pin diameter		Pin length		Inner plate depth	Plate thickness	Ultimate tensile strength	Average tensile strength	Weight per meter
Chain No.	P	d ₁ max	b ₁ min	d ₂ max	d ₃ min	L max	L _c max	h ₂ max	T max	Q _{min}	Q ₀	q
	mm	mm	mm	mm	mm	mm	mm	mm	mm	kN/lbf	kN	kg/m
C08BHP	12.700	8.51	7.75	6.55	4.50	16.4	17.6	11.80	1.6/1.3	11.0/2500	11.5	0.62
C40HP	12.700	7.95	7.85	5.63	4.00	16.5	17.6	12.00	1.50	11.0/2500	12.2	0.64
C50HP	15.875	10.16	9.40	7.03	5.13	20.7	21.9	15.09	2.03	20.0/4545	22.6	1.05
C60HP	19.050	11.91	12.70	8.31	6.00	25.8	26.8	18.00	2.42	24.0/5455	26.9	1.52
C80HP	25.400	15.88	15.75	11.40	8.05	32.5	33.8	24.00	3.25	50.0/11364	52.0	2.63
C2040HP	25.400	7.95	7.85	5.63	4.00	16.5	17.6	12.00	1.50	11.0/2500	12.6	0.46
C2050HP	31.750	10.16	9.40	7.22	5.12	20.5	21.8	15.00	2.03	20.4/4636	22.8	0.76
C2060HP	38.100	11.91	12.70	8.31	6.00	25.8	26.8	17.00	2.42	24.0/5455	27.1	1.02
C2060H-HP	38.100	11.91	12.70	8.31	6.00	29.2	30.2	17.00	3.25	24.0/5455	27.1	1.29
HB38.1F8	38.100	10.16	9.65	7.10	5.40	20.4	-	16.00	2.03	13.0/2954	14.3	0.67
HP40F1	40.000	18.00	22.00	12.00	8.00	47.5	48.2	35.00	5.00	57.0/13049	63.8	5.38
HP40F2	40.000	18.00	22.00	12.00	8.20	47.5	48.2	35.00	5.00	57.0/13049	63.0	5.37
HP50F1	50.000	26.00	14.50	20.00	14.70	35.3	36.2	40.00	3.10	30.0/6818	33.6	3.98
C2080HP	50.800	15.88	15.75	11.40	8.05	32.5	33.8	24.00	3.25	50.0/11364	52.0	1.81

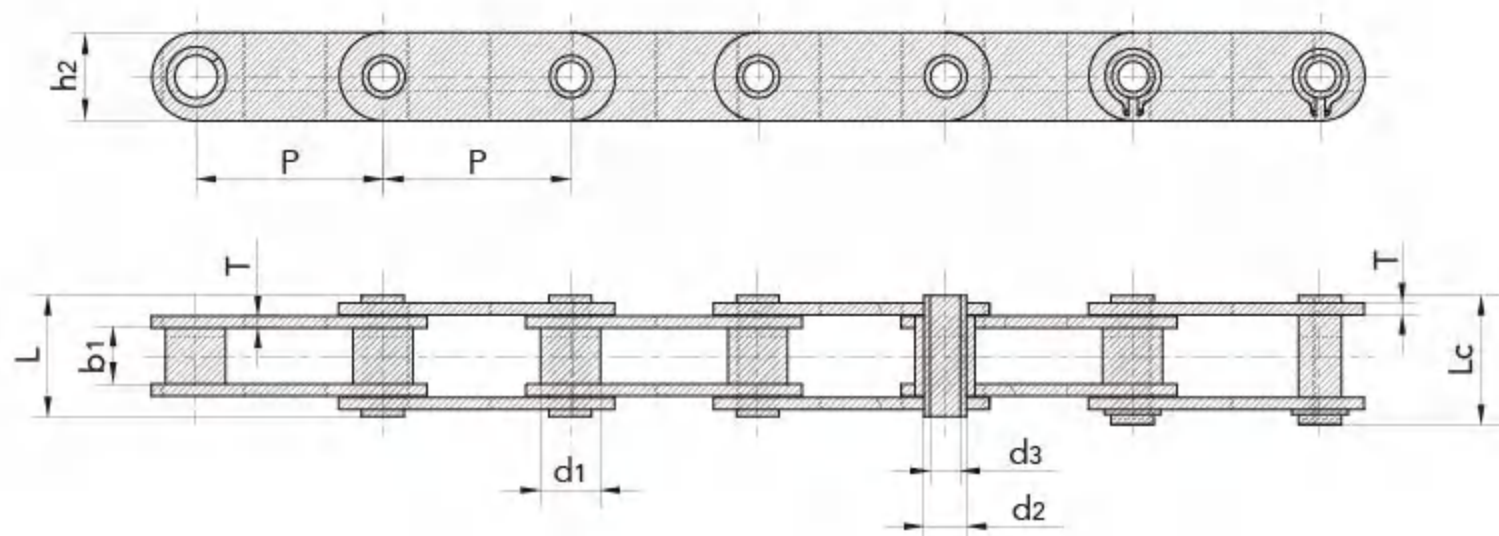

传动链
Driving Chain

曳引链
Hoisting Chain

输送带
Conveyor Chain

不锈钢链
Stainless Steel Chain


农机链
Agricultural Chain

空心销轴链 Hollow pin chain


空心销轴链 Hollow pin chain

链号	节距	滚子直径	内节内宽	销轴直径		销轴长度		内链板高度	链板厚度	极限拉伸载荷	平均拉伸载荷	每米长重	型号
Chain No.	P	d ₁ max	b ₁ min	d ₂ max	d ₃ min	L max	L _c max	h ₂ max	T max	Q min	Q ₀	q	Type
	mm	mm	mm	mm	mm	mm	mm	mm	mm	kN/lbf	kN	kg/m	
HP50F2	50.000	31.00	15.00	13.20	10.20	36.50	38.00	25.00	4.00	40.00/9091	43.20	3.40	B
HB50F4	50.000	30.00	10.00	16.00	8.00	26.60	30.00	25.40	3.00	60.00/13635	67.20	2.03	B
HB50.8	50.800	30.00	10.50	11.40	8.20	27.40	28.60	26.00	3.10	50.00/11364	53.60	2.56	B
HB63	63.000	30.00	10.00	11.40	8.10	26.70	28.10	26.50	3.10	50.00/11364	53.60	2.07	B
HB63F1	63.000	40.00	10.00	11.40	8.10	26.70	28.10	26.50	3.10	50.00/11364	53.60	2.27	B
HB63F2	63.000	40.00	20.00	11.40	8.10	36.70	38.10	26.50	3.10	50.00/11364	53.60	3.20	B
HB63F3	63.000	40.00	15.00	11.40	8.20	35.60	37.00	26.50	4.00	35.00/7955	38.50	3.90	B
HB63F4	63.000	30.00	20.00	11.40	8.10	36.70	38.10	26.50	3.10	50.00/11364	53.60	2.97	B
HB63F6	63.000	30.00	10.00	11.70	8.20	26.70	28.10	26.50	3.10	50.00/11364	56.70	2.08	B
HB63F7	63.000	40.00	18.00	14.00	10.20	38.00	39.50	28.00	4.00	50.00/11364	56.70	4.26	B
HB63F8	63.000	30.00	20.00	11.70	8.10	36.50	38.00	26.50	3.10	50.00/11364	56.70	2.91	B
HB63F14	63.000	30.00	10.00	11.40	8.10	30.20	31.60	26.50	4.00	50.00/11240	55.00	2.45	B
HB80F3	80.000	45.00	20.00	24.00	18.00	39.00	40.60	40.00	3.50	75.00/16858	82.50	4.60	B
HB100	100.000	30.00	10.50	11.40	8.20	27.40	28.60	26.00	3.10	50.00/11364	53.60	1.56	B
HB38.1	38.100	20.00	8.00	8.00	5.30	19.60	20.70	17.30	2.03	28.00/5682	28.80	0.98	B
HB38.1F1	38.100	20.00	18.00	10.50	5.10	39.00	40.30	22.00	4.00	60.00/13636	64.30	2.59	B
HB60	60.000	30.00	10.00	11.50	8.20	26.50	28.40	25.00	3.00	50.00	53.50	1.82	B
HB50	50.000	31.00	15.00	11.40	8.20	31.40	32.70	26.00	3.00	40.00	53.60	2.98	B

A型
Type A

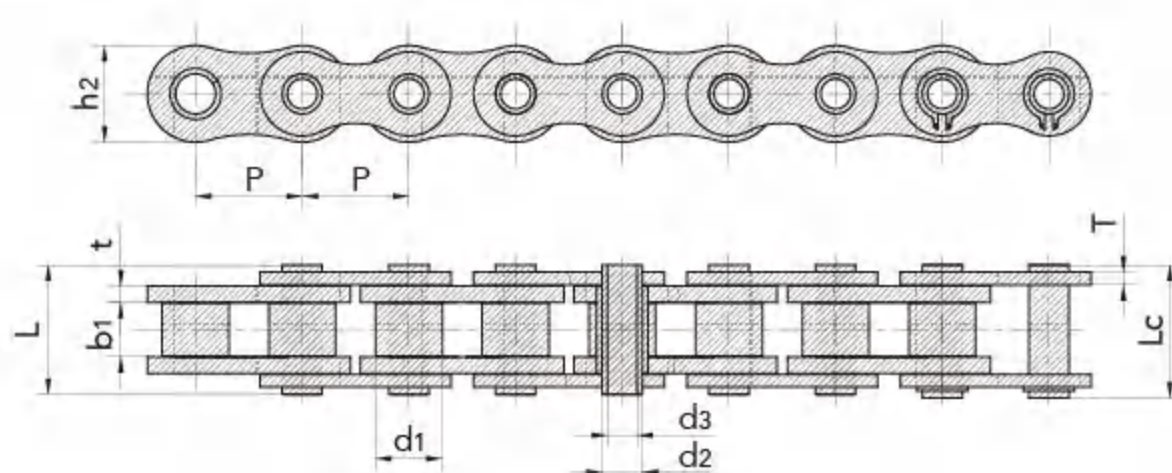


B型
Type B

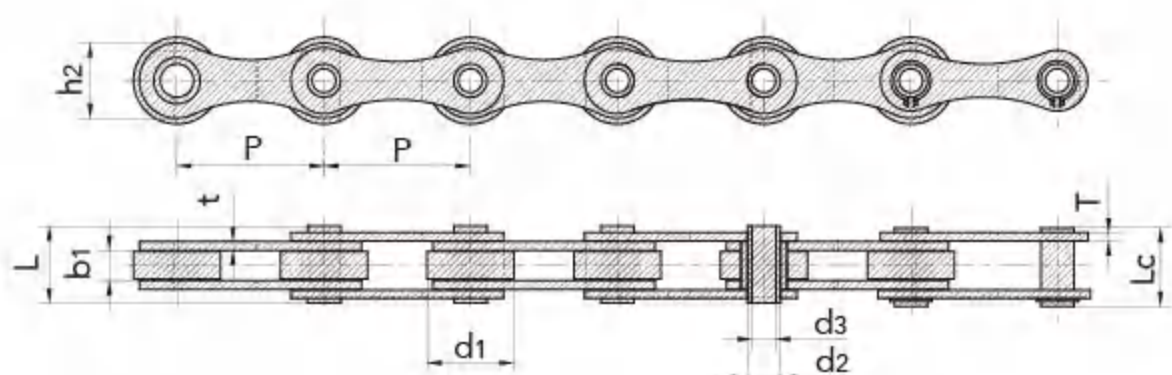

空心销轴链 Hollow pin chain

空心销轴链 Hollow pin chain


链号	节距	滚子直径	内节内宽	销轴直径		销轴长度		内链板高度	链板厚度	极限拉伸载荷	平均拉伸载荷	每米长重
	Pitch	Roller diameter	Width between inner plates	Pin diameter		Pin length		Inner plate depth	Plate thickness	Ultimate tensile strength	Average tensile strength	Weight per meter
Chain No.	P	d ₁ max	b ₁ min	d ₂ max	d ₃ min	L max	L _c max	h ₂ max	T max	Q min	Q ₀	q
	mm	mm	mm	mm	mm	mm	mm	mm	mm	kN/lbf	kN	kg/m
C2042HP	25.40	15.88	7.85	5.63	4.00	16.5	17.6	12.00	1.50	11.0/2500	12.6	0.78
C2052HP	31.75	19.05	9.53	7.22	5.12	20.5	21.8	15.00	2.03	20.4/4636	22.8	1.25
C2062HP	38.10	22.23	12.70	8.31	6.00	25.8	26.8	17.00	2.42	24.0/5455	27.1	1.72
C2082HP	50.80	28.58	15.75	11.40	8.05	32.4	33.8	24.00	3.25	50.0/11364	52.0	2.82
C2042H-HP	25.40	15.88	7.85	5.63	4.00	18.8	19.9	12.00	2.03	11.0/2500	13.2	0.95
C2052HPF1	31.75	19.05	9.40	7.03	5.12	20.0	21.5	15.30	1.85	15.0/3409	17.3	1.21
C2052H-HP	31.75	19.05	9.53	7.22	5.12	22.1	23.4	15.00	2.42	20.4/4545	23.5	1.44
C2062H-HP	38.10	22.23	12.70	8.31	6.00	29.2	30.2	17.00	3.25	24.0/5455	27.6	1.99
C2082H-HP	50.80	28.58	15.75	11.40	8.05	35.7	37.0	24.00	4.00	50.0/11364	56.5	3.34
HP40	40.00	22.00	8.75	9.00	6.00	23.0	24.2	18.00	2.50	27.0/4545	28.0	1.49
HP50	50.00	31.00	14.50	13.20	10.40	31.1	32.5	25.00	3.10	30.0/6818	34.2	3.29
C1500C	50.00	31.00	15.00	14.00	10.20	35.0	37.0	25.00	4.00	40.0/9091	48.0	3.98
HB50.8F8	50.80	32.00	20.00	19.10	12.40	44.6	46.4	40.00	5.00/4.00	100.0/22727	108.0	6.75
HP50.8	50.80	26.00	15.88	20.00	14.30	41.0	42.2	38.10	4.80	100.0/22727	108.0	5.32
63HPF1	63.00	40.00	15.00	16.00	12.10	35.0	36.2	28.50	4.00	50.0/11364	56.7	4.20
C2069HP	38.10	22.23	12.70	8.33	6.20	26.0	27.4	18.40	2.42	27.0	28.0	1.80
C1400C	50.00	31.00	15.00	14.00	10.20	31.0	33.0	25.00	3.00	35.0	48.0	3.00
2502	100.00	31.00	15.00	14.00	10.20	35.0	37.0	25.00	4.00	40.0	48.0	2.60
2501	75.00	31.00	15.00	14.00	10.20	35.0	37.0	25.00	4.00	40.0	48.0	3.10
2250	50.00	25.00	11.50	9.00	6.20	26.0	27.5	20.00	2.50	30.0	31.2	1.80
HB50.8F3	50.8	30.00	16.00	14.00	9.00	36.4	37.5	25.5	3.1	42.0/9545	47.0	3.20
C1701C	75.0	40.00	22.00	18.00	12.20	43.6	45.2	35.0	4.0	60.0/13636	72.0	5.57
HB76.2	76.2	31.75	15.50	12.70	9.50	35.5	37.0	26.0	4.0	42.0/9545	49.2	3.25
HB80	80.0	50.00	20.00	24.00	18.50	44.5	46.1	40.0	5.0/4.0	79.0/17953	92.5	6.81
HP100	100.0	45.00	22.00	16.00	12.00	46.0	47.5	35.0	5.0	75.0/17044	90.0	6.20
HP76.2F3	76.2	47.60	20.00	16.88	9.50	45.5	47.0	40.0	5.0/4.0	60.0	72.0	7.52

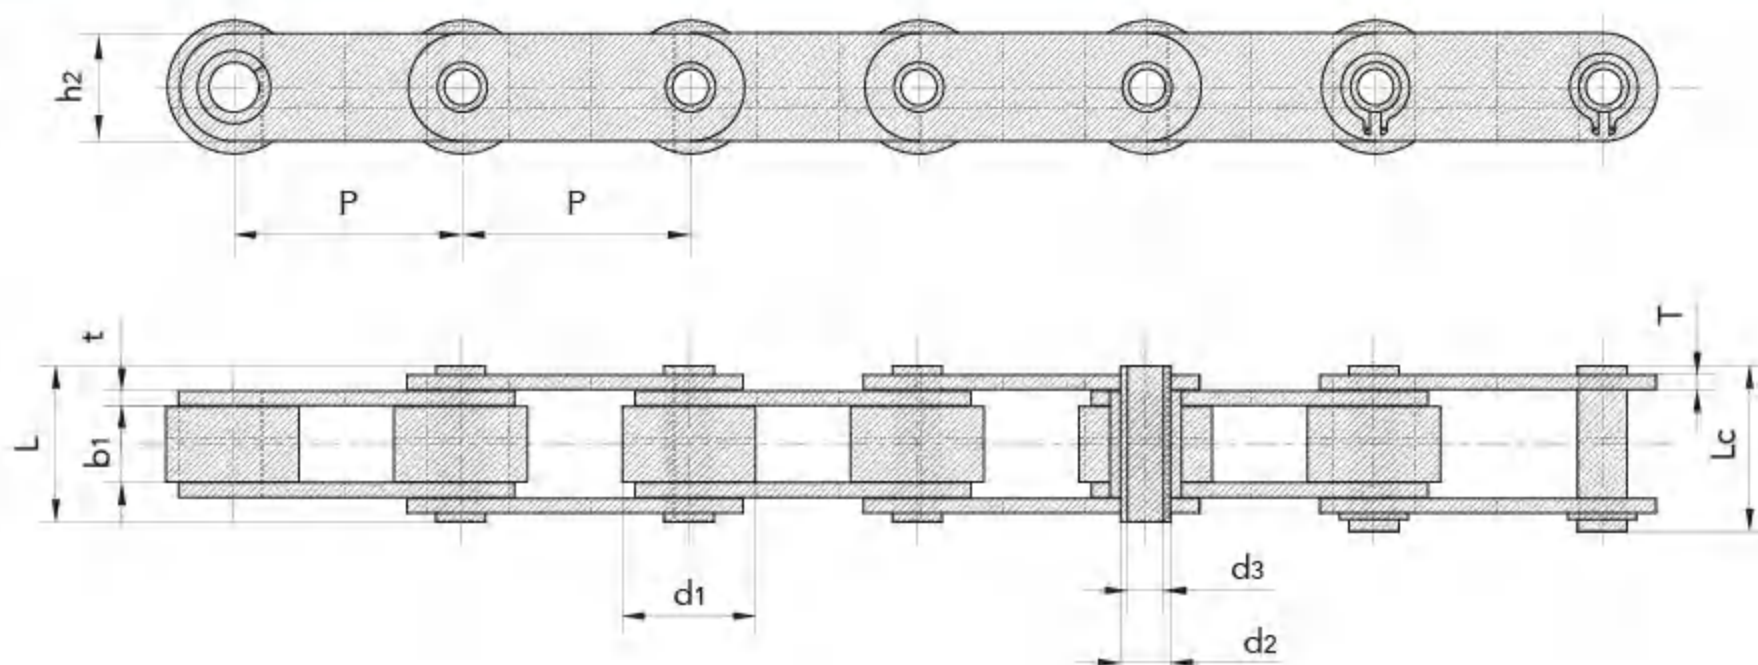

空心销轴链 Hollow pin chain

空心销轴链 Hollow pin chain


链号	节距 Pitch	滚子直径 Roller diameter	内节内宽 Width between inner plates	销轴直径 Pin diameter		销轴长度 Pin length		内链板高度 Inner plate depth	链板厚度 Plate thickness	极限拉伸载荷 Ultimate tensile strength	平均拉伸载荷 Average tensile strength	每米长重 Weight per meter
Chain No.	P	d ₁ max	b ₁ min	d ₂ max	d ₃ min	L max	L _c max	h ₂ max	T max	Q _{min}	Q ₀	q
	mm	mm	mm	mm	mm	mm	mm	mm	mm	kN/lbf	kN	kg/m
HB50.8F18	50.80	38.10	16.00	14.00	10.00	47.5	28.0	25.4	4.80/3.90	57.0/12812	62.70	5.30
HB63F11	63.00	40.00	20.00	20.00	18.00	42.5	43.5	42.0	4.00	46.0/10454	50.60	5.83
HB63F12	63.00	30.00	10.00	11.40	8.10	26.7	28.1	26.5	3.10	50.0/11364	56.50	2.39
C2102HP	63.50	39.67	18.90	13.60	9.50	40.3	42.0	30.0	4.00	60.0/13636	72.00	5.13
HB100F7	100.00	30.00	15.00	16.00	12.30	36.5	37.8	35.0	4.00	75.0/17046	84.70	3.49
HP101.6F1	101.60	47.60	19.00	19.00	13.20	46.2	48.0	40.0	5.0/4.0	53.0/12045	58.20	6.09
HP101.6F2	101.60	66.70	25.40	26.90	20.10	59.2	60.7	51.0	7.1/5.1	150.0/34088	160.00	14.23
HP152	152.40	66.70	25.40	26.90	19.56	57.2	59.5	50.8	7.1/5.1	94.0/21362	107.80	9.90
HP152.4F4	152.40	64.00	25.40	29.00	21.00	59.5	60.1	50.0	8.00/5.00	71.3/16028	78.43	9.82
HP101.6	101.60	45.00	26.00	18.00	12.20	52.0	53.8	35.0	5.00	75.0	90.00	6.22
HP57.15	57.15	30.00	10.00	14.00	10.00	26.0	28.0	26.5	3.00	35.0	50.00	1.93
HP31.75	31.75	19.05	9.60	10.40	7.30	22.2	24.3	17.5	2.50	30.0	31.00	1.41

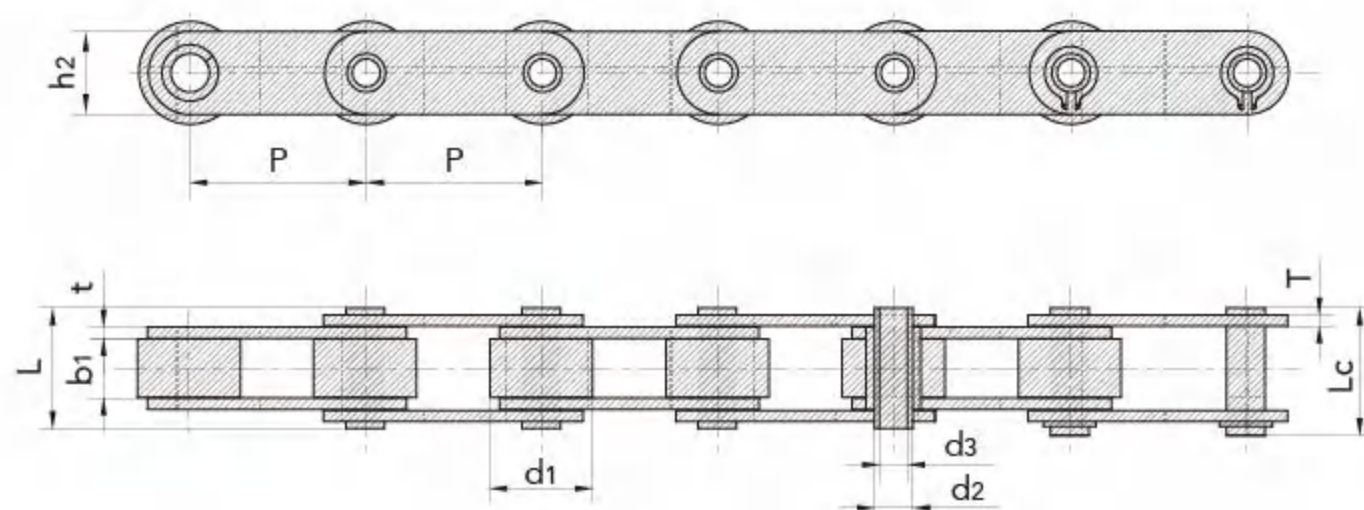

空心销轴链 Hollow pin chain

空心销轴链 Hollow pin chain

链号	节距	滚子直径	内节内宽	销轴直径		销轴长度		内链板高度	链板厚度	极限拉伸载荷	平均拉伸载荷	每米长重	型号
Chain No.	P	d ₁ max	b ₁ min	d ₂ max	d ₃ min	L max	L _c max	h ₂ max	T max	Q _{min}	Q ₀	q	Type
	mm	mm	mm	mm	mm	mm	mm	mm	mm	kN/lbf	kN	kg/m	
08BHPF2	12.700	8.51	13.20	6.65	5.20	18.00	19.2	11.8	1.6/1.3	10.0/2273	11.4	0.50	A
08BHPF3	12.700	8.51	13.40	6.65	4.00	19.00	20.2	11.8	1.70	14.0/3182	16.8	0.69	A
HB12.7	12.700	8.51	13.40	6.65	4.10	19.00	20.2	11.8	1.70	14.0/3182	16.8	0.69	A
08BHPF8	12.700	8.51	11.30	6.30	4.50	16.70	18.5	11.8	1.60	11.0/2500	12.1	0.80	A
40HPF1-D3	12.700	8.51	11.60	6.35	4.36	20.60	20.6	12.0	1.50	11.0/2500	12.1	0.77	A
41HP	12.700	7.77	9.20	5.63	4.19	13.75	16.0	9.91	1.30	4.0/899	4.4	0.35	A
10BHPF1	15.875	10.16	13.41	7.03	5.00	19.20	20.2	14.0	1.85	17.0/3864	20.6	0.83	A
10BHPF2	15.875	10.16	10.40	7.03	5.00	17.00	18.0	14.0	1.85	15.0/3409	17.3	0.74	A
12BHPF1	19.050	12.07	16.00	8.03	5.40	22.70	23.9	15.8	1.85	25.0/5682	28.8	1.09	A
16BHPF1	25.400	15.88	25.58	11.50	8.10	36.50	37.6	21.0	4.15/3.1	45.0/10227	52.2	2.21	A
50HPF1	15.875	10.16	13.60	7.03	5.13	20.70	21.9	14.4	2.03	18.0/4091	21.6	0.92	A
60HPF2	19.050	11.91	11.23	5.63	4.05	16.50	17.6	10.4	1.50	10.0/2273	10.8	0.62	A
C12BHPF9	19.050	12.07	15.80	8.03	5.00	22.40	23.9	16.1	1.85	25.0/5682	28.8	1.26	B
12BHPF9	19.050	12.07	15.80	8.03	5.00	22.40	23.9	16.1	1.85	25.0/5682	28.8	1.18	A
60HPF3	19.050	11.91	17.20	8.40	6.10	24.70	26.0	18.0	2.03	20.0/4546	24.0	1.54	A
HP38.1F10	38.100	17.95	23.50	13.60	10.44	36.00	37.3	28.4	3.70	70.0/15736	77.0	2.66	A
63HP	63.000	40.00	23.50	16.00	12.00	35.30	38.3	28.6	4.00	65.0/14773	71.5	4.14	B
63HPF2	63.000	40.00	25.80	14.00	8.08	39.10	41.1	20.0	5.00	50.0/11364	65.7	4.17	B
63HPF4	63.000	40.00	23.50	16.00	12.20	34.70	37.7	28.6	4.00	44.0/10000	57.2	4.13	B
63HPF6	63.000	40.00	28.94	16.00	10.30	41.80	43.4	28.6	4.00	44.0/10000	57.2	5.18	B
63HPF11	63.000	40.00	23.50	16.00	12.20	34.70	37.7	28.6	4.00	65.0/147333	71.5	4.25	B
63HPF12	63.000	40.00	23.50	16.00	12.20	34.70	37.7	28.0	4.00	44.0/10000	57.2	4.02	B
C2122HPF1	76.200	47.60	29.00	17.81	12.70	43.30	44.7	38.1	4.80	53.3/12123	59.2	7.05	B
C2062HPF1	38.100	22.23	19.50	10.00	6.50	29.00	31.0	18.0	3.25	24.0	32.0	2.00	B

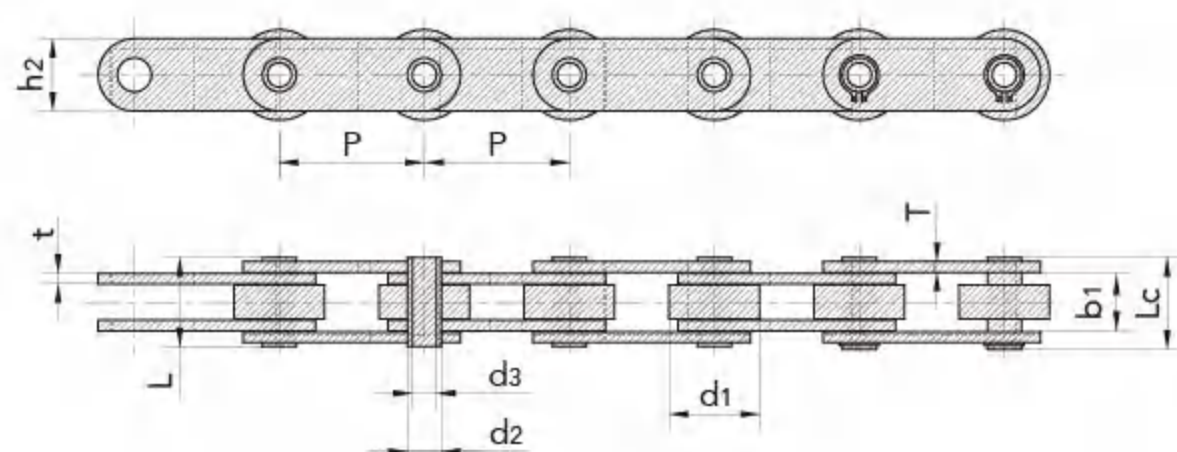

传动链
Driving Chain

曳引链
Hoisting Chain

输送带
Conveyor Chain



不锈钢链
Stainless Steel Chain

农机链
Agricultural Chain

工程用钢制套筒链 Engineering steel bush chain

工程用钢制套筒链 Engineering steel bush chain

链号 ANSI	链号	节距 Pitch	套筒直径 Bush diameter	内节内宽 Width between inner plates	销轴直径 Pin diameter	销轴长度 Pin length	内链板高度 Innerplate depth	链板厚度 Plate thickness	极限拉伸载荷 Ultimate tensile strength	平均拉伸载荷 Average tensile strength	每米长重 Weight per meter
ANSI Chain No.	Chain No.	P	d ₁ max	b ₁ min	d ₂ max	L max	h ₂ max	T max	Q _{min}	Q ₀	q
		mm	mm	mm	mm	mm	mm	mm	kN/lbf	kN	kg/m
S102B		101.60	25.40	54.10	15.88	111.3	38.10	9.7	160.0/35993	176.0	10.40
S110		152.40	32.00	54.10	15.88	111.3	38.10	9.7	160.0/35993	176.0	9.80
S111		120.90	36.60	66.80	19.05	131.2	50.80	9.7	214.0/48141	235.4	15.90
S131		78.11	32.00	33.50	15.88	90.5	38.10	9.7	160.0/35993	176.0	11.60
S150		153.67	44.70	84.30	25.40	164.6	63.50	12.7	378.0/85034	416.0	25.70
S188		66.27	22.40	26.90	12.70	68.6	28.40	6.4	102.0/22946	112.2	5.60
S856		152.40	44.40	76.20	25.40	154.9	63.50	12.7	365.0/82110	401.5	25.00
S857		152.40	44.40	76.20	25.40	154.9	82.60	12.7	432.0/97182	475.2	32.00
S859		152.40	60.40	95.30	31.75	188.5	101.60	16.0	690.0/155221	759.0	55.90
S864		177.80	60.40	95.30	31.75	188.5	101.60	16.0	690.0/155221	759.0	51.80
	S102.5	102.36	34.93	57.15	19.05	115.0	44.45	9.5	214.0/48141	235.4	14.09

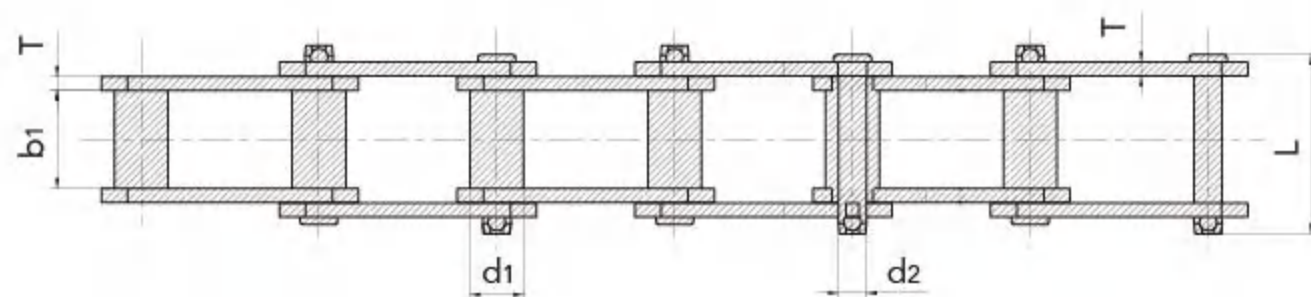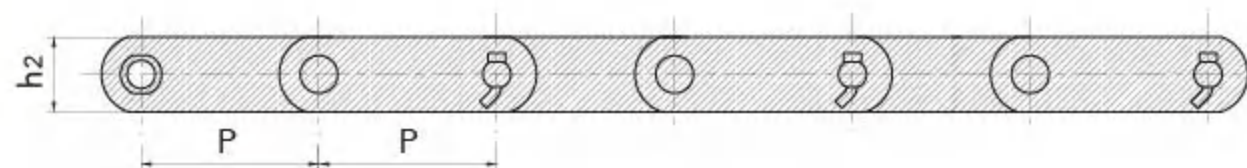

焊接弯板链 Welded type cranked link chain

焊接弯板链 Welded type cranked link chain


链号	节距	套筒直径	内节内宽	销轴直径	销轴长度		链板高度	链板厚度	极限拉伸载荷	平均拉伸载荷	每米长重
Chain No.	Pitch	Bush diameter	Width between inner plates	Pin diameter	L max	Lc max	Plate depth	Plate thickness	Ultimate tensile strength	Average tensile strength	Weight per meter
	P	d ₁ max	b ₁ min	d ₂ max	L max	Lc max	h ₂ max	T max	Q _{min}	Q ₀	q
	mm	mm	mm	mm	mm	mm	mm	mm	kN/lbf	kN	kg/m
WR78 WH78	66.27	22.90	28.40	12.78	73.00	79.3	28.4	6.4	93.4/21227 106.8/24273	102.70 117.50	6.20
WR82 WH82	78.10	31.50	31.80	14.35	80.00	86.0	31.8	6.4	100.1/22750 131.2/29818	110.10 144.30	7.98
WR106 WH106	152.40	37.10	41.20	19.13	103.00	111.0	38.1	9.7	169.0/38409 224.6/51045	185.90 247.00	10.56
WR110 WH110	152.40	32.00	46.70	19.13	107.70	115.5	38.1	9.7	169.0/38409 224.6/51045	185.90 247.00	10.40
WR111 WH111	120.90	37.10	57.20	19.13	116.80	124.5	38.1	9.7	169.0/38409 224.6/51045	185.90 247.00	12.72
WR124 WH124	101.60	37.10	41.20	19.13	103.00	110.0	38.1	9.7	169.0/38409 224.6/51045	185.90 247.00	12.38
WR124H WH124H	103.20	41.70	41.20	22.30	131.60	133.0	50.8	12.7	275.8/62682 355.9/80886	303.30 391.40	19.68
WR132 WH132	153.67	44.70	76.20	25.48	151.00	162.2	50.8	12.7	275.8/62682 378.1/85932	303.30 415.90	20.00
WR150 WH150	153.67	44.45	73.00	25.40	151.00	162.2	63.5	12.7	620.0/140907	682.00	20.50
WR155 WH155	153.67	44.45	73.00	28.57	164.00	176.0	63.5	12.7	820.0/186361	902.00	20.70
WR157 WH157	153.67	44.45	76.20	28.57	164.00	176.0	63.5	15.9	820.0/186361	902.00	20.80

■注: W R 仅销轴和套筒热处理

W H 所有零件热处理

■Note: W R - Welded steel chain - only pins & bushes heat treated

W H - Welded steel chain - all heat treated

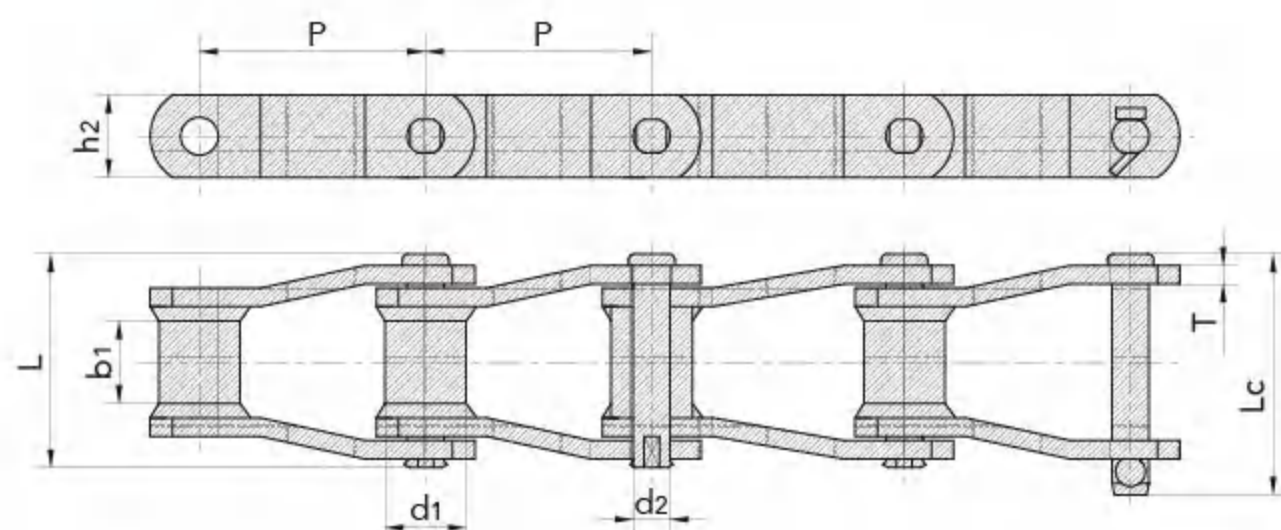

传动链
Driving Chain

曳引链
Hoisting Chain

输送带
Conveyor Chain


不锈钢链
Stainless Steel Chain

农机链
Agricultural Chain

钢制销合链 Steel pintle chain

钢制销合链 Steel pintle chain

链号	节距	内节内宽	销轴直径	销轴长度		链板高度	链板厚度	极限拉伸载荷	平均拉伸载荷	每米长重
	Pitch	Width between inner plates	Pin diameter	Pin length		Plate depth	Plate thickness	Ultimate tensile strength	Average tensile strength	Weight per meter
Chain No.	P	b ₁ min	d ₂ max	L max	L _c max	h ₂ max	T max	Q _{min}	Q _o	q
	mm	mm	mm	mm	mm	mm	mm	kN/lbf	kN	kg/m
662	42.27	22.9	7.19	41.2	44.2	18.8	3.2	37.80/8591	41.5	1.63
667H	58.75	25.4	7.94	43.7	46.7	22.2	3.2	42.30/9614	46.5	1.87
667X	57.15	26.6	11.10	50.2	55.0	23.8	4.3	66.70/15159	73.3	2.98
667XH	57.15	27.4	11.91	58.0	62.0	27.3	5.7	124.50/28295	136.9	4.34
667K	57.15	27.4	11.10	55.5	60.0	27.3	5.1	89.00/20227	97.9	3.91
667J	57.15	26.6	9.53	50.2	55.0	27.3	4.3	62.28/14155	68.5	2.81
88K	66.27	27.4	11.10	55.5	60.0	27.3	5.1	89.00/20227	97.9	3.73
88C	66.27	31.4	12.70	64.6	69.0	28.9	6.4	133.36/30309	146.6	5.17

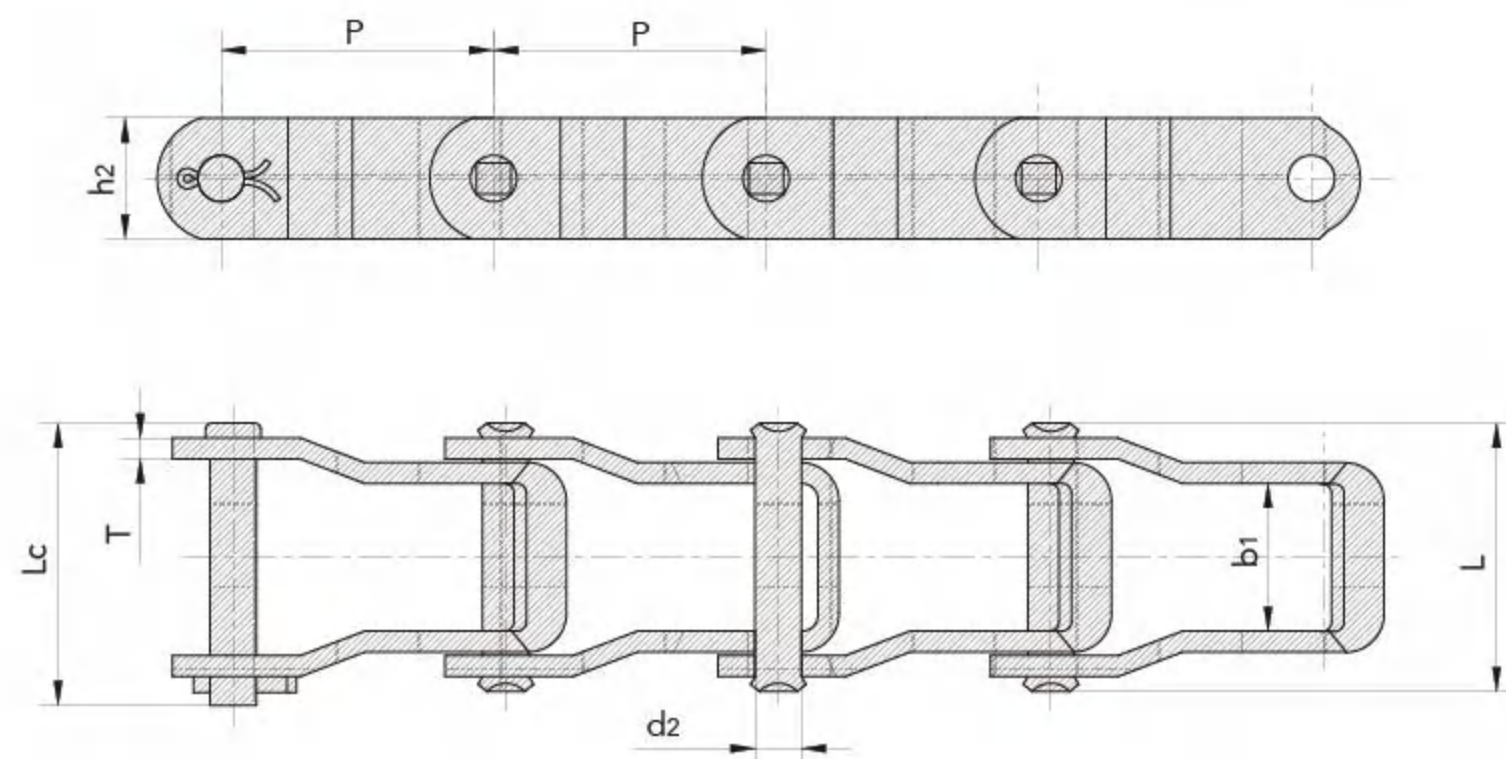


刮板输送链 Scraper conveyor chain

刮板输送链 Scraper conveyor chain

链号	节距 Pitch			内节内宽 Width between inner plates	销轴直径 Pin diameter	套筒直径 Bush diameter	h_4	链板高度 Plate depth	链板厚度 Plate thickness	W	破断载荷 Breaking load
Chain No.	P			b_1 min	d_2 max	d_5 max		h_2 max	T max		Q min
	mm			mm	mm	mm	mm	mm	mm	mm	mm
MR56	100	125	-	24.0	10.0	15.0	20.0	30.0	4.0	•	56.0/12727
MR80	100	125	160	28.0	12.0	18.0	25.0	35.0	5.0	•	80.0/18182
MR112	100	125	160	32.0	15.0	21.0	35.0	40.0	6.0	•	112.0/25454
MR160	100	125	160	37.0	18.0	25.0	40.0	50.0	7.0	•	160.0/36364
MR224	125	160	200	43.0	21.0	30.0	44.0	60.0	8.0	•	224.0/50909
MR315	160	200	250	48.0	25.0	36.0	50.0	70.0	10.0	•	315.0/71591
FVR40	80	100	125	18.0	10.0	15.0	20.0	25.0	3.0	•	42.0/9545
FVR63	100	125	160	22.0	12.0	18.0	25.0	30.0	4.0	•	64.0/14545
FVR90	100	125	160	25.0	14.0	20.0	30.0	35.0	5.0	•	100.0/22727
FVR112	100	125	160	30.0	16.0	22.0	35.0	40.0	6.0	•	120.0/27272
FVR140	125	160	200	35.0	18.0	26.0	38.0	45.0	6.0	•	145.0/32954
FVR180	125	160	200	45.0	20.0	30.0	44.0	50.0	8.0	•	190.0/43181
FVR250	160	200	250	55.0	26.0	36.0	50.0	60.0	8.0	•	275.0/62499

- 表示自由尺寸 (根据客户要求定)
- Dimensions are specified by the customer

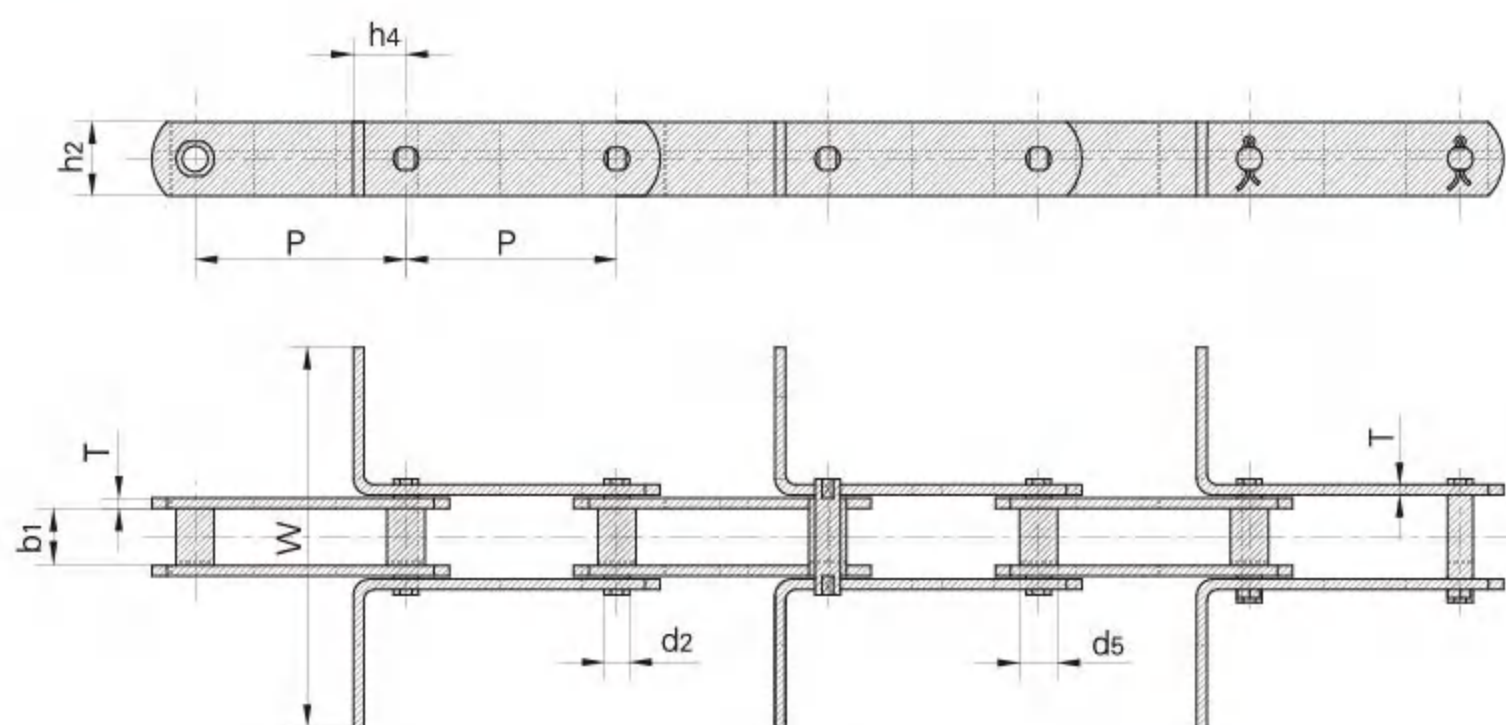

传动链
Driving Chain

曳引链
Hoisting Chain

输送链
Conveyor Chain

不锈钢链
Stainless Steel Chain

农机链
Agricultural Chain

刮板输送链 Scraper conveyor chain

刮板输送链 Scraper conveyor chain


链号	节距	套筒直径	内节内宽	销轴直径	销轴长度		极限拉伸载荷	平均拉伸载荷	每米长重
	Pitch	Bush diameter	Width between inner plates	Pin diameter	L max	Lc max	Ultimate tensile strength	Average tensile strength	Weight per meter
Chain No.	P	d ₁ max	b ₁ min	d ₂ max	L max	Lc max	Q _{min}	Q _o	q
	mm	mm	mm	mm	mm	mm	kN/lbf	kN	kg/m
MR112F7-S-100	100.0	30.0*	32.00	15.00	64.5	69.0	112.0/36000	123.2	8.95
MR160F4-S-160	160.0	36.0*	37.00	18.00	85.0	-	160.0/36000	176.0	11.39
MR224F1-S-125	125.0	42.0*	43.00	21.00	85.0	91.0	224.0/50357	246.4	17.92
M80-P100F1	100.0	18.0	28.00	12.00	55.0	58.5	80.0/18162	88.0	5.19
M180-P-100	100.0	26.0	28.85	18.00	62.5	-	180.0/40909	198.0	10.25
M310-P-125	125.0	40.0*	52.00	20.00	103.4	109.4	303.8/69045	334.0	19.88
FVR40F4-B-100	100.0	15.0	18.00	10.00	40.0	43.5	40.0/8992	44.0	2.88
FVR90F1-B-125	125.0	20.0	25.00	14.00	52.0	56.4	150.0/33743	165.0	6.16
FVR180F2-B-160	160.0	30.0	49.00	20.00	91.0	97.0	250.0/56203	275.0	15.53
P110F2	110.0	23.92	32.00	15.85	-	77.0	120.0	132.0	7.30
P160F2	160.0	37.70	66.00	26.00	125.0	125.0	224.0/50357	245.0	20.70

*表示滚子外径

* Indicates the external diameter of roller

刮板输送链 Scraper conveyor chain

链号	G	F	W	K	h ₄	h ₂	d ₄	T
Chain No.	mm	mm	mm	mm	mm	mm	mm	mm
MR112F7-S-100	160.0	120.0	235.0	205.0	35.0	40.0	12.0	6.0
MR160F4-S-160	248.5	140.0	300.0	250.0	63.5	50.0	18.0	7.0
MR224F1-S-125	203.0	-	235.0	-	44.0	60.0	-	8.0
M80-P100F1	145.5	-	180.0	-	25.0	35.0	-	5.0
M180-P-100	163.0	-	185.0	-	35.0	50.0	-	6.0
M310-P-125	195.0	-	270.0	-	35.0	55.0	-	10.0
FVR40F4-B-100	134.5	-	200.0	-	20.0	25.0	-	4.0
FVR90F1-B-125	175.0	90.0	290.0	270.0	30.0	40.0	9.0	5.0
FVR180F2-B-160	230.0	248.0	368.0	308.0	35.0	60.0	8.0	8.0
P110F2	172.0	-	235.0	191.0	40.0	35.0	8.6	6.0
P160F2	-	-	373.0	343.8	41.5	60.0	9.2	8.0

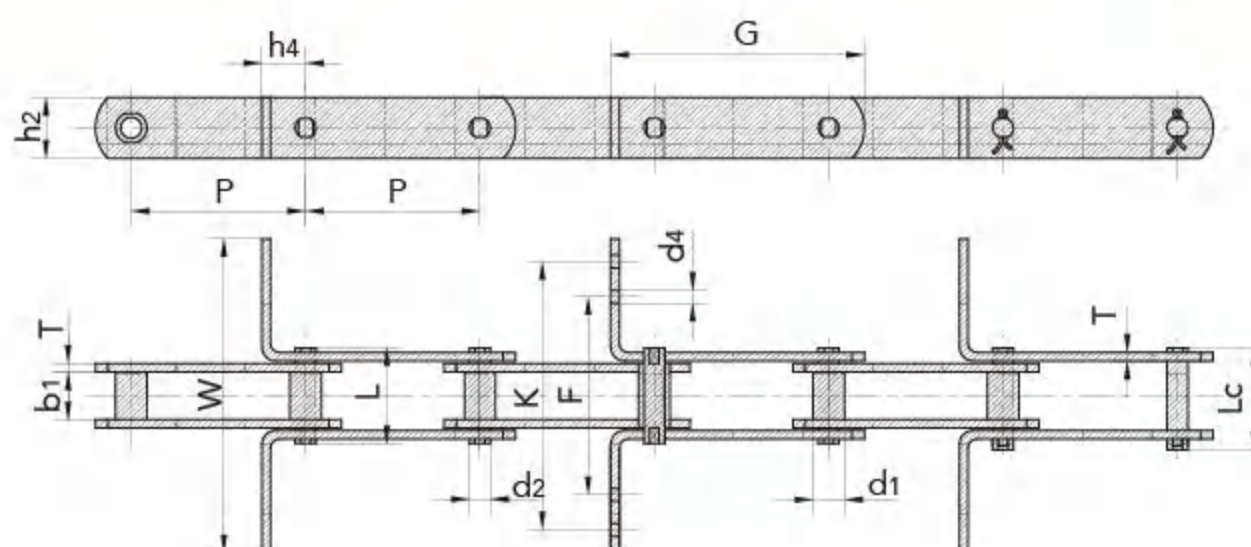

摊铺机用输送链 Conveyor chain for crawler asphalt paver

摊铺机用输送链 Conveyor chain for crawler asphalt paver


链号	节距	滚子直径	内节内宽	销轴直径	销轴长度		链板高度	链板厚度	极限拉伸载荷	每米长重
	Pitch	Roller diameter	Width between inner plates	Pin diameter	Pin length		Plate depth	Plate thickness	Ultimate tensile strength	Weight per meter
Chain No.	P	d ₁ max	b ₁ min	d ₂ max	L max	L _c max	h ₂ max	t/T max	Q min	q
	mm	mm	mm	mm	mm	mm	mm	mm	kN/lbf	kg/m
P80F7	80.0	35.76	35.3	18.00	72.0	76.7	46.00	7.0/6.2	95.0/21370	11.91
P80F8	80.0	27.94	33.8	15.90	68.4	76.0	44.45	6.0/8.0	190.0/42741	10.80
P80F17	80.0	36.00	35.3	18.00	81.0	81.5	45.00	6.0/5.0	195.0/43866	12.90
P80F19	80.0	27.94	33.8	15.90	68.4	75.8	45.00	6.0/8.0	190.0/42741	11.20
P80F21	80.0	27.94	34.0	15.90	78.4	-	45.00	6.0/8.0	190.0/42741	10.70
*P80F27	80.0	26.00	35.3	18.00	72.0	76.7	46.00	7.0/6.2	195.0/43866	9.55
P80F29	80.0	27.94	33.8	15.90	70.4	74.0	45.00	6.0/8.0	190.0/42741	10.80
P80F45	80.0	32.00	35.0	15.90	70.6	78.0	45.00	6.0/8.0	190.0/42741	10.94
*P80F51A1	80.0	26.00	35.0	15.90	69.5	77.0	45.00	6.0/8.0	175.0/39340	10.42

■*套筒链：表中滚子直径d₁为套筒直径

■*Bush chain: d₁ in the table indicates the external diameter of the bush

摊铺机用输送链 Conveyor chain for crawler asphalt paver


链号	F	W	G	h ₄	d ₄	d ₅	T ₁
Chain No.	mm	mm	mm	mm	mm	mm	mm
P80F7	56.4	81.4	50.5	5.0	21.0	8.2	6.2
P80F8	63.0	88.0	50.0	8.0	22.0	10.2	14.2
P80F17	66.3	91.3	50.0	-	24.0	-	15.0
P80F19	56.5	81.5	50.0	6.2	22.0	8.0	8.0
P80F21	57.0	82.0	50.0	-	21.5	-	8.0
*P80F27	56.2	81.5	50.5	-	21.0	-	6.2
P80F29	56.5	81.5	50.0	6.2	22.0	10.0	8.0
P80F45	57.5	80.0	50.0	-	25.0	-	8.0
*P80F51A1	57.0	82.0	50.0	-	20.5	-	8.0

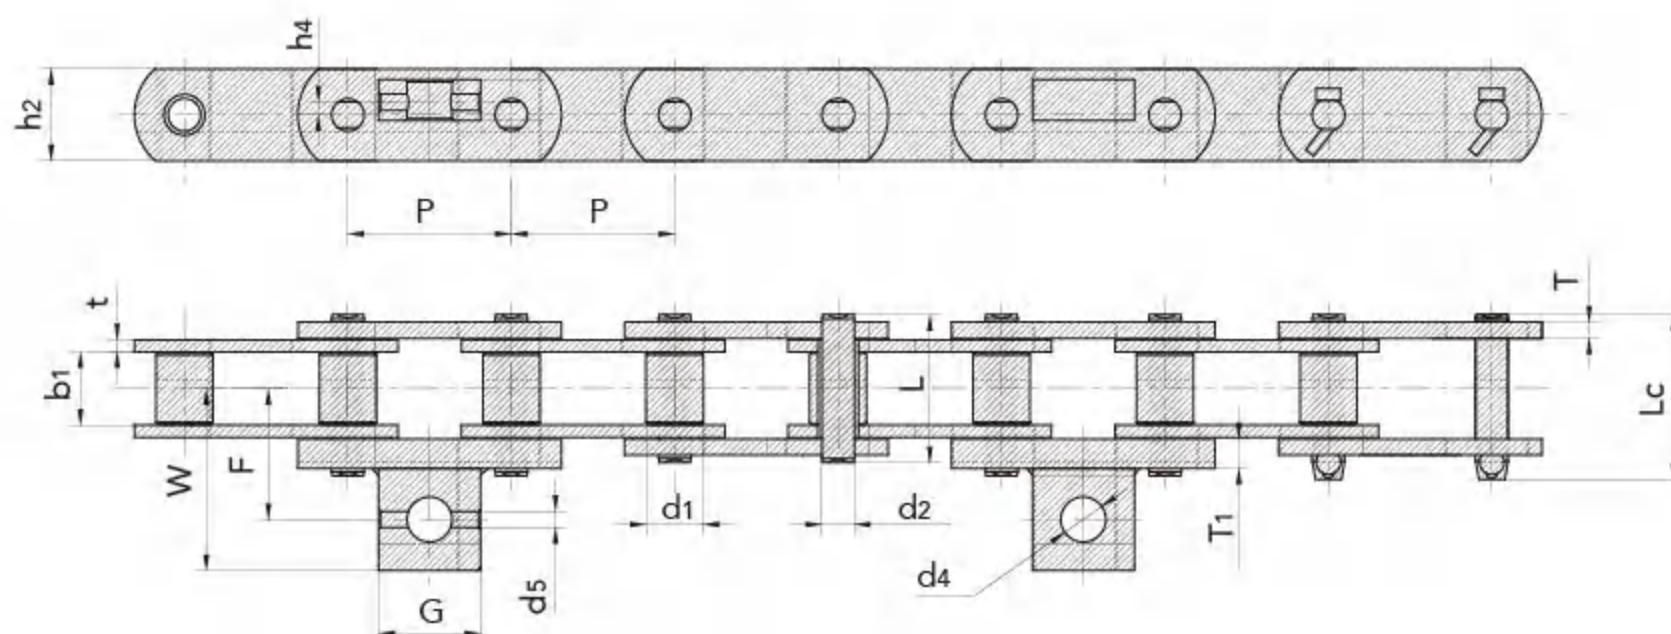

筑路机械链 Conveyor chain for road construction machinery

筑路机械链 Conveyor chain for road construction machinery

链号	节距 Pitch	滚子直径 Roller diameter	内节内宽 Width between inner plates	销轴直径 Pin diameter	销轴长度 Pin length	内链板高度 Inner plate depth	链板厚度 Plate thickness	附板尺寸 Attachment dimension		抗拉强度 Tensile strength
Chain No.	P	d ₁ max	b ₁ min	d ₂ max	L _c max	h ₂ max	t	h ₄	g	Q _{min}
	mm	mm	mm	mm	mm	mm	mm	mm	mm	kN
P15517	78.10	31.75	37.80	15.88	93.40	38.10	9.50	82.60	12.50	266.70
P15582	101.60	38.10	50.40	17.50	121.00	44.50	12.70	101.60	16.50	355.60
C9856M ₂	152.40	69.85	76.20	25.40	152.00	63.50	12.70	152.35	20.60	622.30
C9856M ₁	152.40	69.85	76.20	25.40	152.00	63.50	12.70	126.95	20.60	622.30

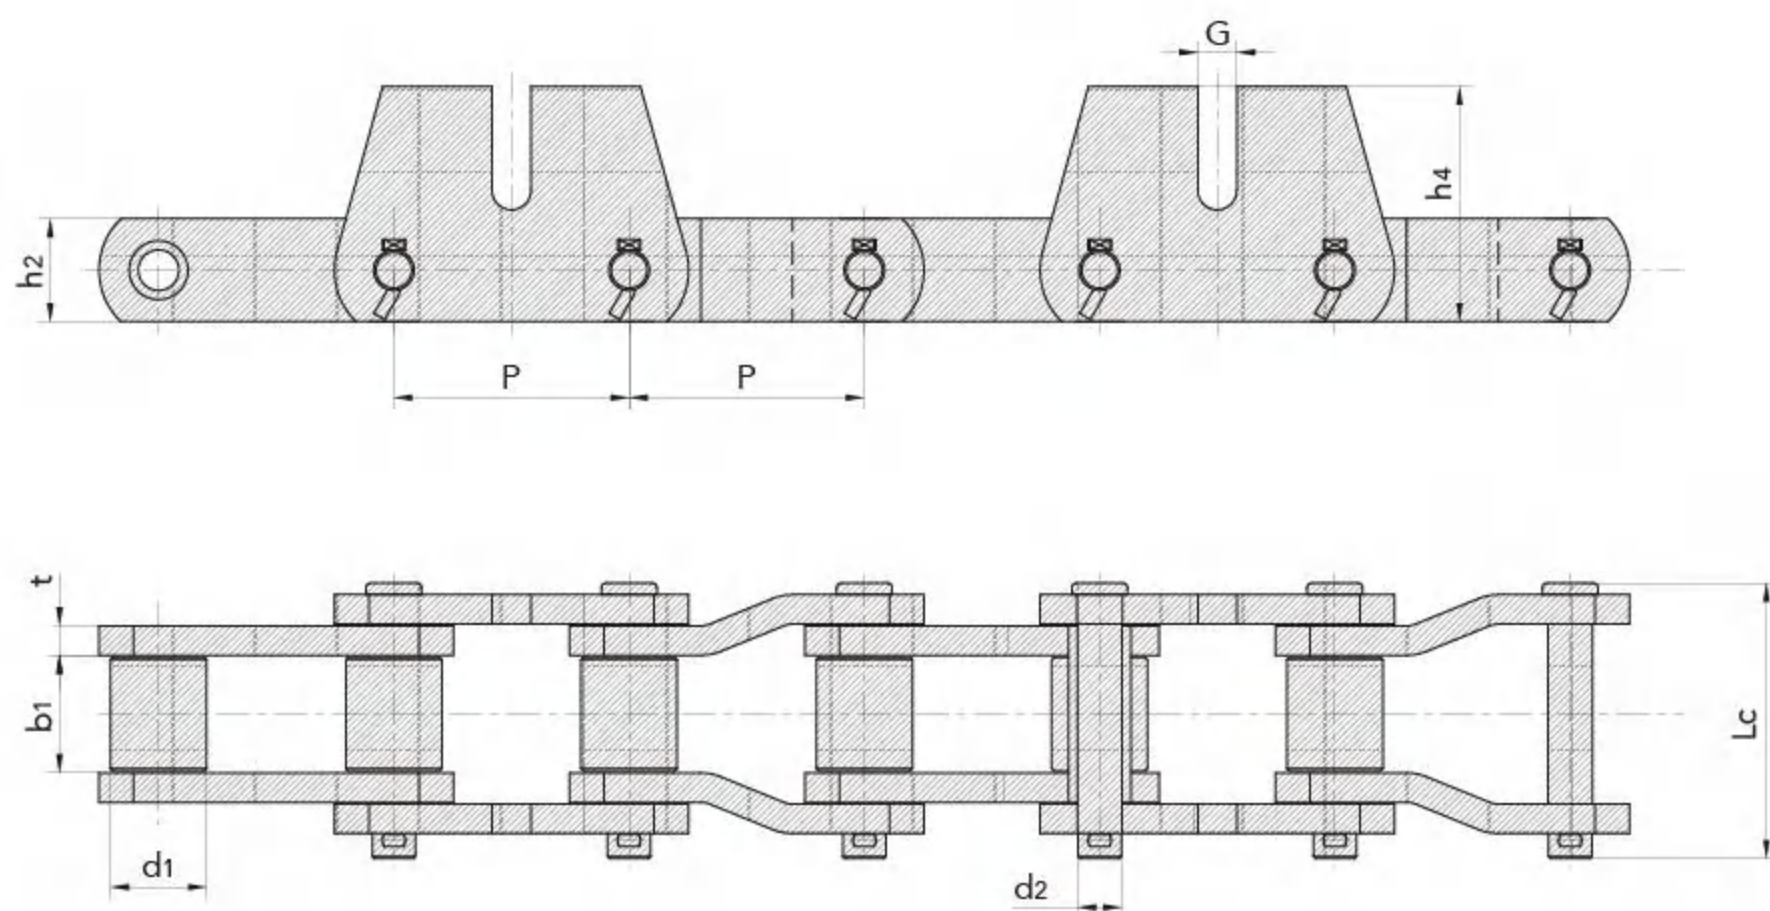


烟草机械输送链 Tobacco conveyor chain

烟草机械输送链 Tobacco conveyor chain

链号	节距	滚子直径	内节内宽	销轴直径	销轴长度	链板高度	链板厚度	抗拉强度	平均抗拉强度	每米长重
Chain No.	Pitch	Roller diameter	Width between inner plates	Pin diameter	Pin length	Plate depth	Plate thickness	Tensile strength	Average tensile strength	Weight per meter
	P	d ₁ max	b ₁ min	d ₂ max	L _c max	h ₂ max	t	Q _{min}	Q ₀	q
	mm	mm	mm	mm	mm	mm	mm	kN/lbf	kN	kg/m
P200A2	200.0	50.0	23.0	11.9	62.0	32.0	6.3	100/22480	110.0	6.4

烟草机械输送链 Tobacco conveyor chain

链号	G	L	F	G1	L1	W1	E1	E2	d4
Chain No.	mm	mm	mm	mm	mm	mm	mm	mm	mm
P200A2	167.0	130.0	41.2	60.0	30.0	23.0	8.0	12.0	8.0

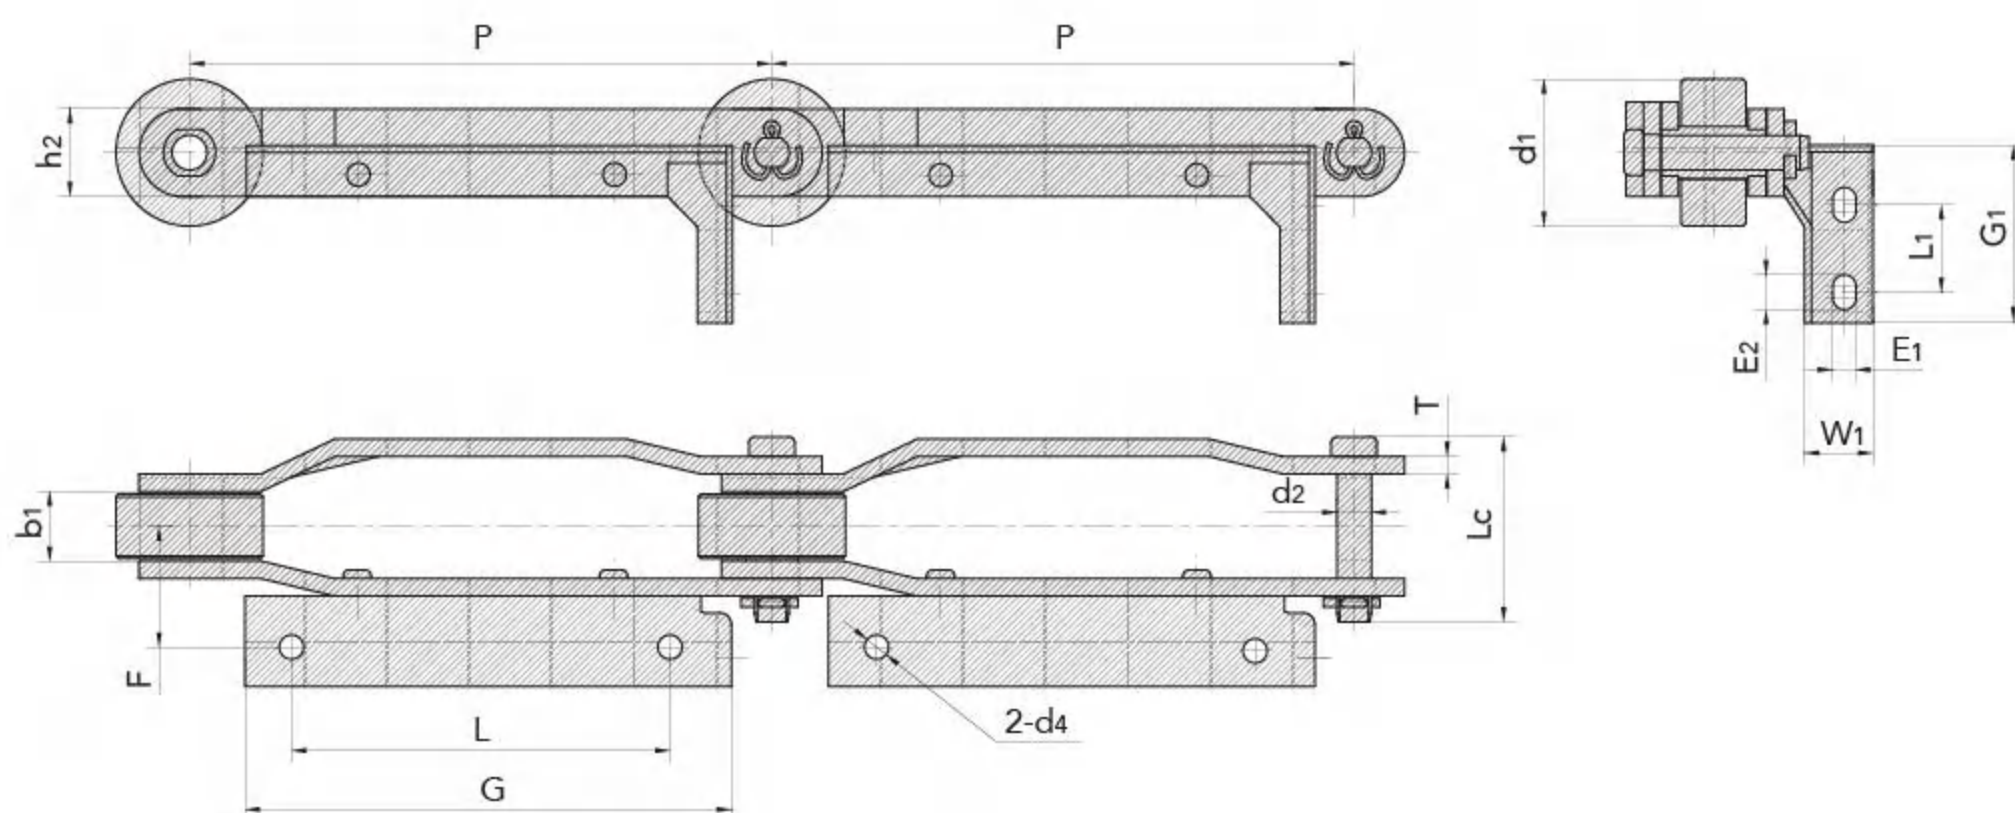

传动链
Driving Chain

曳引链
Hoisting Chain

输送链
Conveyor Chain

不锈钢链
Stainless Steel Chain

农机链
Agricultural Chain


烟草机械输送链 Tobacco conveyor chain

烟草机械输送链 Tobacco conveyor chain

链号	节距 Pitch	滚子直径 Roller diameter	内节内宽 Width between inner plates	销轴直径 Pin diameter	销轴长度 Pin length		链板高度 Plate depth	链板厚度 Plate thickness	抗拉强度 Tensile strength	平均抗拉强度 Average tensile strength	每米长重 Weight per meter
Chain No.	P	d ₁ max	b ₁ min	d ₂ max	L max	L _c max	h ₂ max	t	Q _{min}	Q ₀	q
	mm	mm	mm	mm	mm	mm	mm	mm	kN/lbf	kN	kg/m
C2082F35	50.8	28.58	15.75	7.92	32.7	36.5	24.0	3.25	55.6/12500	60.0	3.37

烟草机械输送链 Tobacco conveyor chain


链号	G	F ₁	F ₂	W ₁	W	d ₄	d ₅
Chain No.	mm	mm	mm	mm	mm	mm	mm
C2082F35	30.0	33.0	32.0	45.7	86.7	8.8	24.0

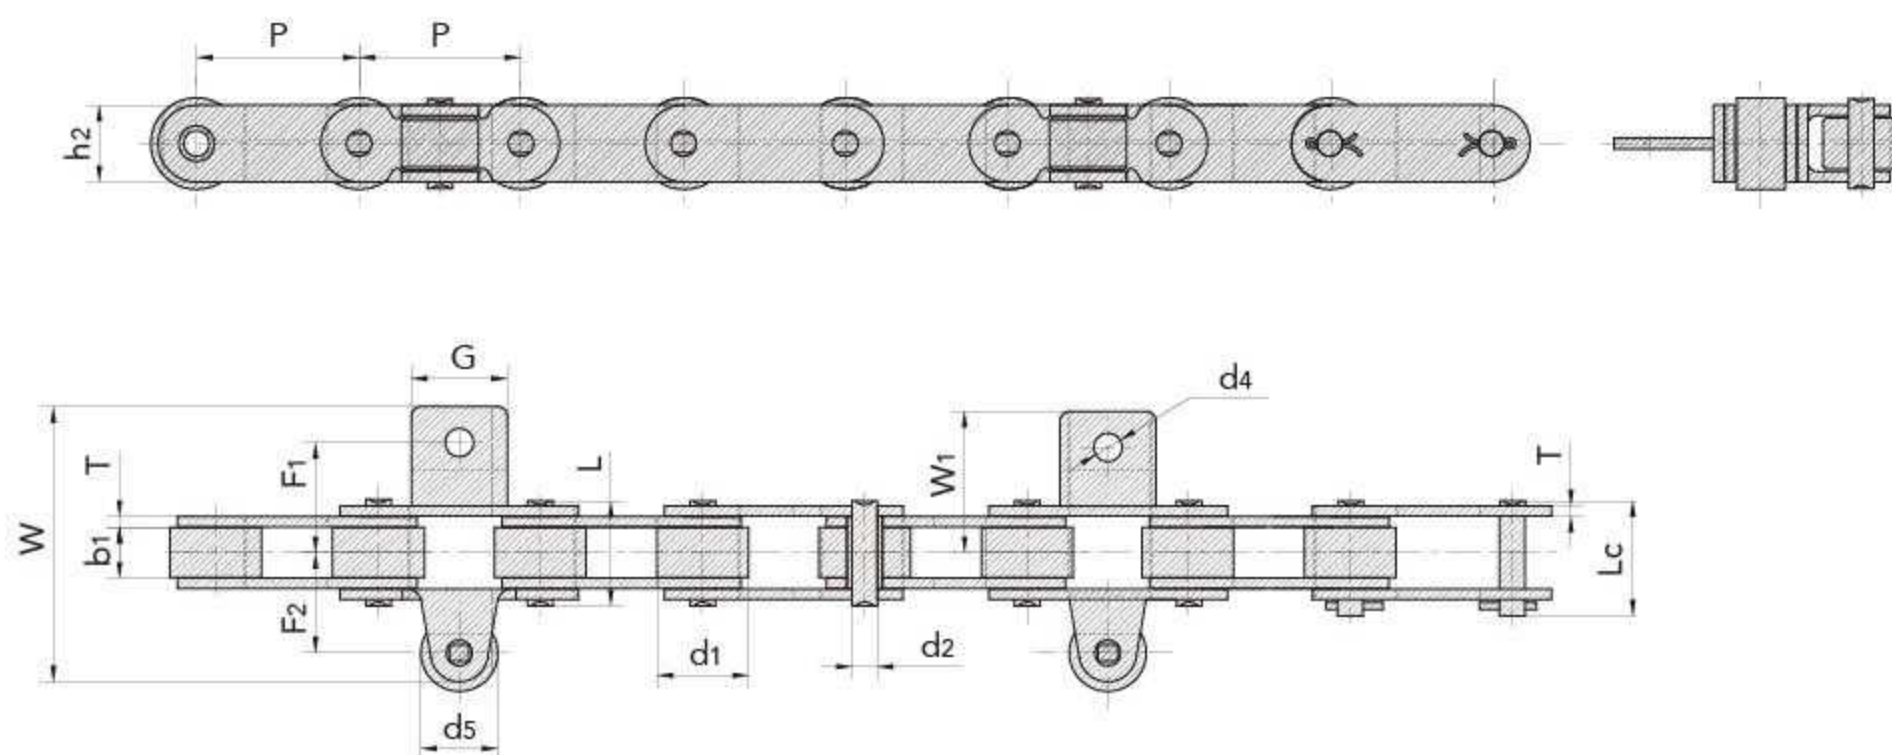

污水处理链 Sewage disposal chain


污水处理链 Sewage disposal chain

链号	节距	滚子直径		内节内宽	销轴直径		销轴长度	链板高度	链板厚度		抗拉强度	平均抗拉强度	每米长重
	Pitch	Roller diameter		Width between inner plates	Pin diameter		Pin length	Plate depth	Plate thickness		Tensile strength	Average tensile strength	Weight per meter
Chain No.	P	d ₁ max	C max	b ₁ min	d ₂ max	d ₃ min	L max	h ₂ max	T max	t max	Q _{min}	Q ₀	q
	mm	mm	mm	mm	mm	mm	mm	mm	mm	mm	kN/lbf	kN	kg/m
P152	152.4	66.7	85.7	25.4	27.1	20.0	58.8	50.0	5.0	7.0	110.0/25000	122.1	10.78

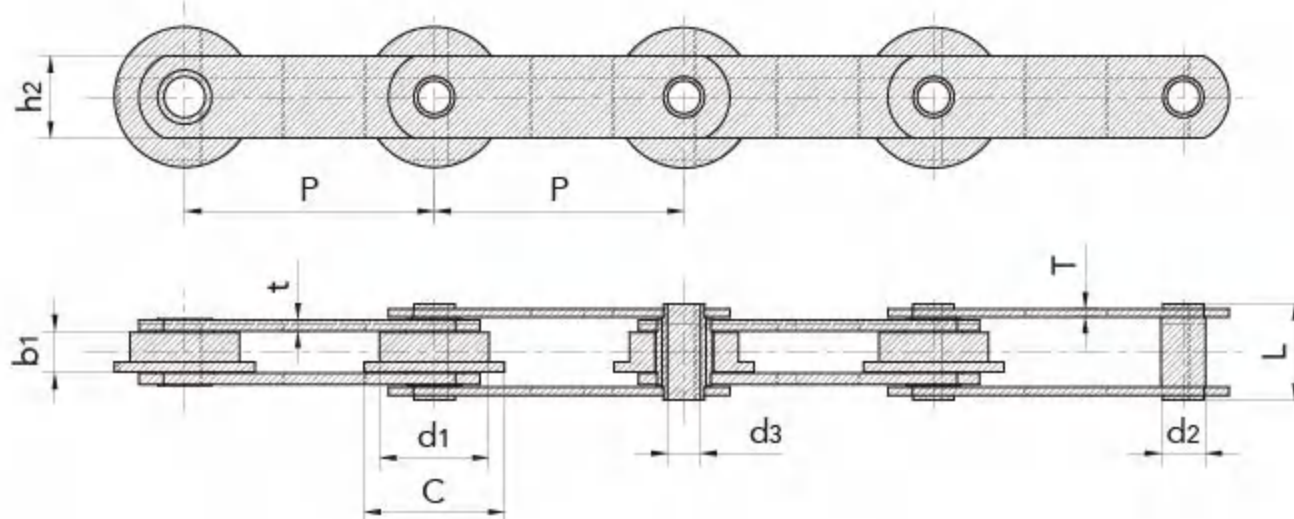

污水处理链 Sewage disposal chain


链号	节距	滚子直径	内节内宽	销轴尺寸			链板尺寸				抗拉强度	每米长重
	Pitch	Roller diameter	Width between inner plates	Pin dimension			Plate dimension				Tensile strength	Weight per meter
Chain No.	P	d ₁ max	b ₁ min	d ₂ max	d ₃ min	L max	h ₂	t	L ₁	d ₄	Q _{min}	q
	mm	mm	mm	mm	mm	mm	mm	mm	mm	mm	kN/lbf	kg/m
P609.6	609.6	95.25	41.65	31.75	49.20	107.80	69.85	9.5	304.8	16.66	230.0/51704	10.78

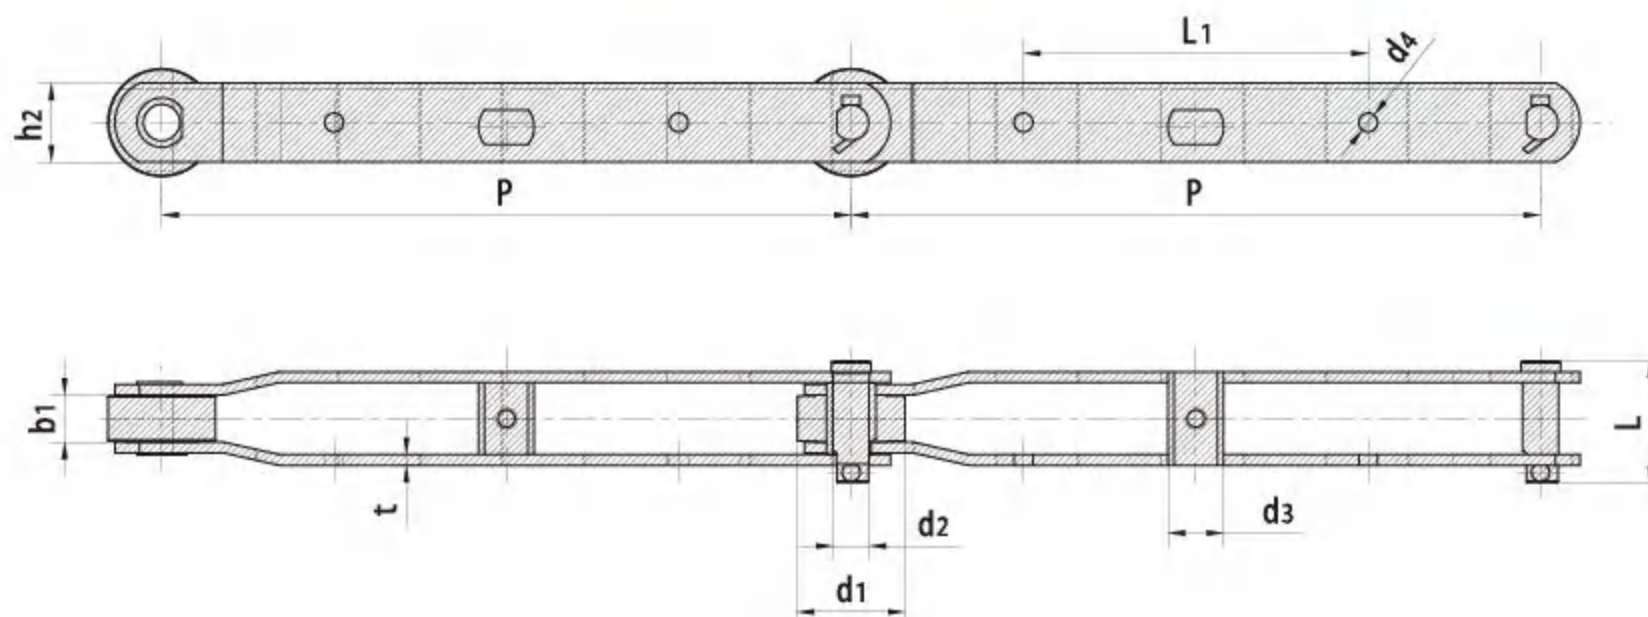

网带炉提升机链 Mesh belt furnace hoisting chain

网带炉提升机链 Mesh belt furnace hoisting chain





链号	P	b1	L	G1	G	h4	d4	C	F	W
Chain No.	mm	mm	mm	mm	mm	mm	mm	mm	mm	mm
WD76.2	76.2	22.4	30.0	56.0	106.6	15.2	11.2	84.8	37.5	48.7

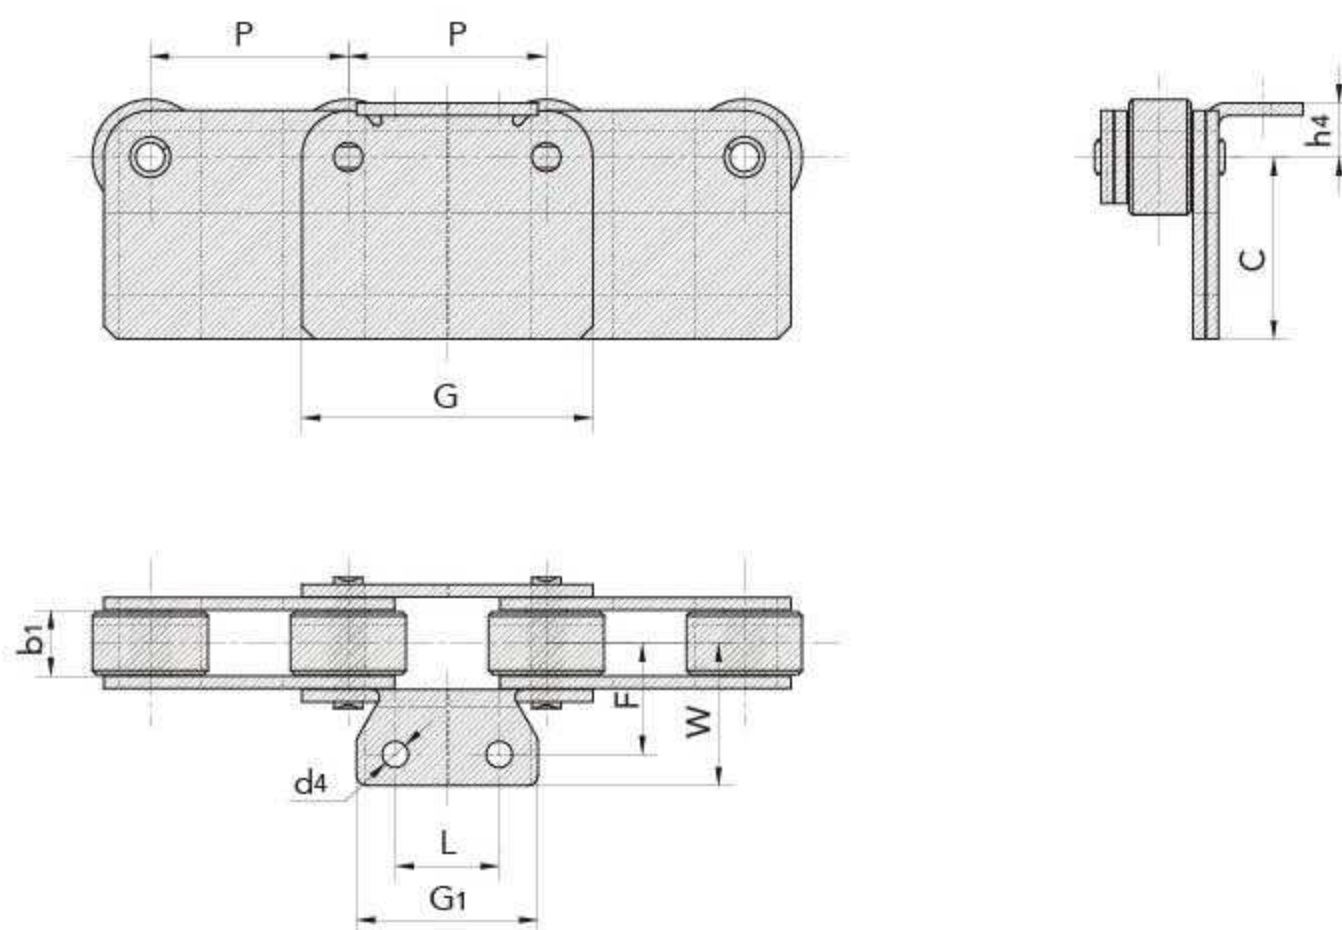

糖机链 Sugar mill chain

糖机链 Sugar mill chain

链号	节距 Pitch	内节内宽 Inner Width of inner Link	滚子直径 Diameter of diameter	销轴长度 Data of Ear-Shaped Attachment						平均拉伸载荷 Data of Pin			每米长重 Tensile Strength
Chain No.	P	b ₁	d ₂ max	A	C	X	N	d ₄	T	d ₂	L ₁	L ₄	Q _{min}
	mm	mm	mm	mm	mm	mm	mm	mm	mm	mm	mm	mm	kN/lbf
SMKW0909	93.70	27.60	44.50	46.80	44.00	59.00	31.80	16.30	13.50	15.90	33.00	40.00	95.00
SMKW1010	101.60	32.60	50.80	50.80	50.80	64.80	35.00	11.10	10.30	12.70	37.50	42.50	100.00
SMKW1510	101.60	32.60	50.80	50.80	54.00	75.00	42.00	16.30	12.70	17.50	39.00	45.00	155.00
SMKW1810	101.60	29.40	50.80	50.80	58.70	76.00	32.00	16.30	12.70	17.50	37.50	43.50	180.00
SMKW09102	102.60	37.50	50.80	50.80	60.30	80.30	49.50	16.30	13.50	17.50	38.00	45.00	95.00
SMKW15152	102.60	37.60	63.50	76.20	62.00	82.00	80.00	16.30	15.00	19.10	38.50	45.50	155.00
SMKW20152	152.40	34.90	76.20	76.20	66.70	92.00	50.00	16.30	16.00	22.23	45.00	54.00	200.00
SMKW34150	152.40	34.90	76.20	76.20	66.70	92.00	50.00	16.30	16.00	22.23	45.00	54.00	340.00
SMKW23152	152.40	36.50	69.90	76.20	66.70	90.00	40.00	16.30	16.00	19.10	44.50	52.00	235.00
SMKW31152	152.40	36.50	69.90	76.20	66.70	90.00	40.00	16.30	16.00	19.10	44.50	52.00	310.00
SMKW38152	152.40	36.50	69.90	76.20	66.70	90.00	40.00	16.30	16.00	19.10	44.50	52.00	385.00

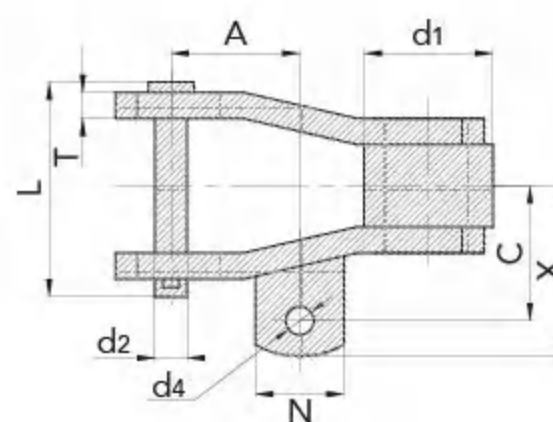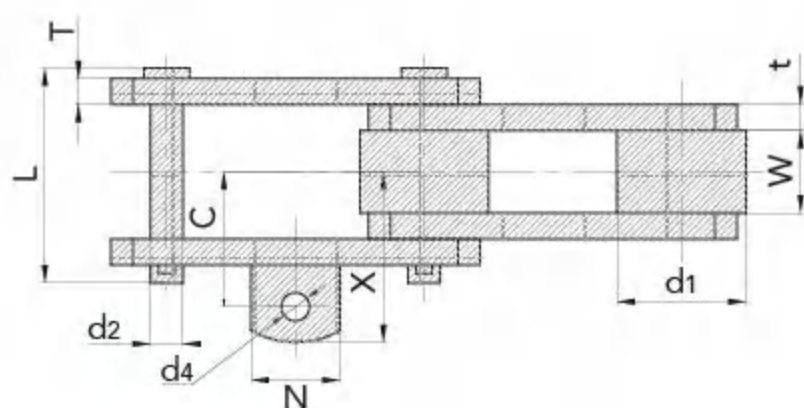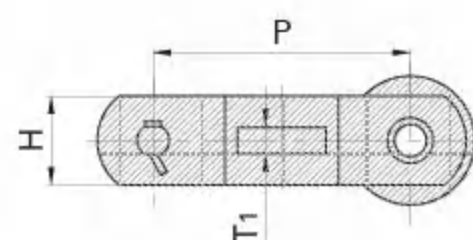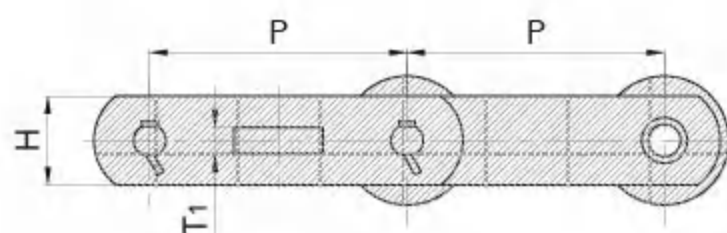

传动链
Driving Chain

曳引链
Hoisting Chain

输送带
Conveyor Chain

不锈钢链
Stainless Steel Chain

农机链
Agricultural Chain


糖机链 Sugar mill chain

糖机链 Sugar mill chain

链号	节距 Pitch	滚子直径 Roller diameter	内节内宽 Width between inner plates	销轴直径 Pin diameter	销轴长度 Pin length	链板高度 Plate depth	链板厚度 Plate thickness	抗拉强度 Tensile strength	平均抗拉强度 Average tensile strength	每米长重 Weight per meter
Chain No.	P	d ₁ max	b ₁	d ₂ max	L _c max	h ₂ max	T max	Q _{min}	Q ₀	q
	mm	mm	mm	mm	mm	mm	mm	kN/lbf	kN	kg/m
P152K2	152.4	69.85	37.1	22.23	111.2	57.2	12.70	413/92842	455.0	26.50
P203.2K2	203.2	88.90	46.0	25.32	126.0	71.4	12.70	520/116900	545.0	37.70

糖机链 Sugar mill chain

链号	P	G	L	F	W	h ₄	d ₄
Chain No.	mm	mm	mm	mm	mm	mm	mm
P152K2	152.4	114.3	76.2	111.10	151.5	41.30	14.30
P203.2K2	203.2	152.4	82.6	131.76	182.6	55.50	19.05

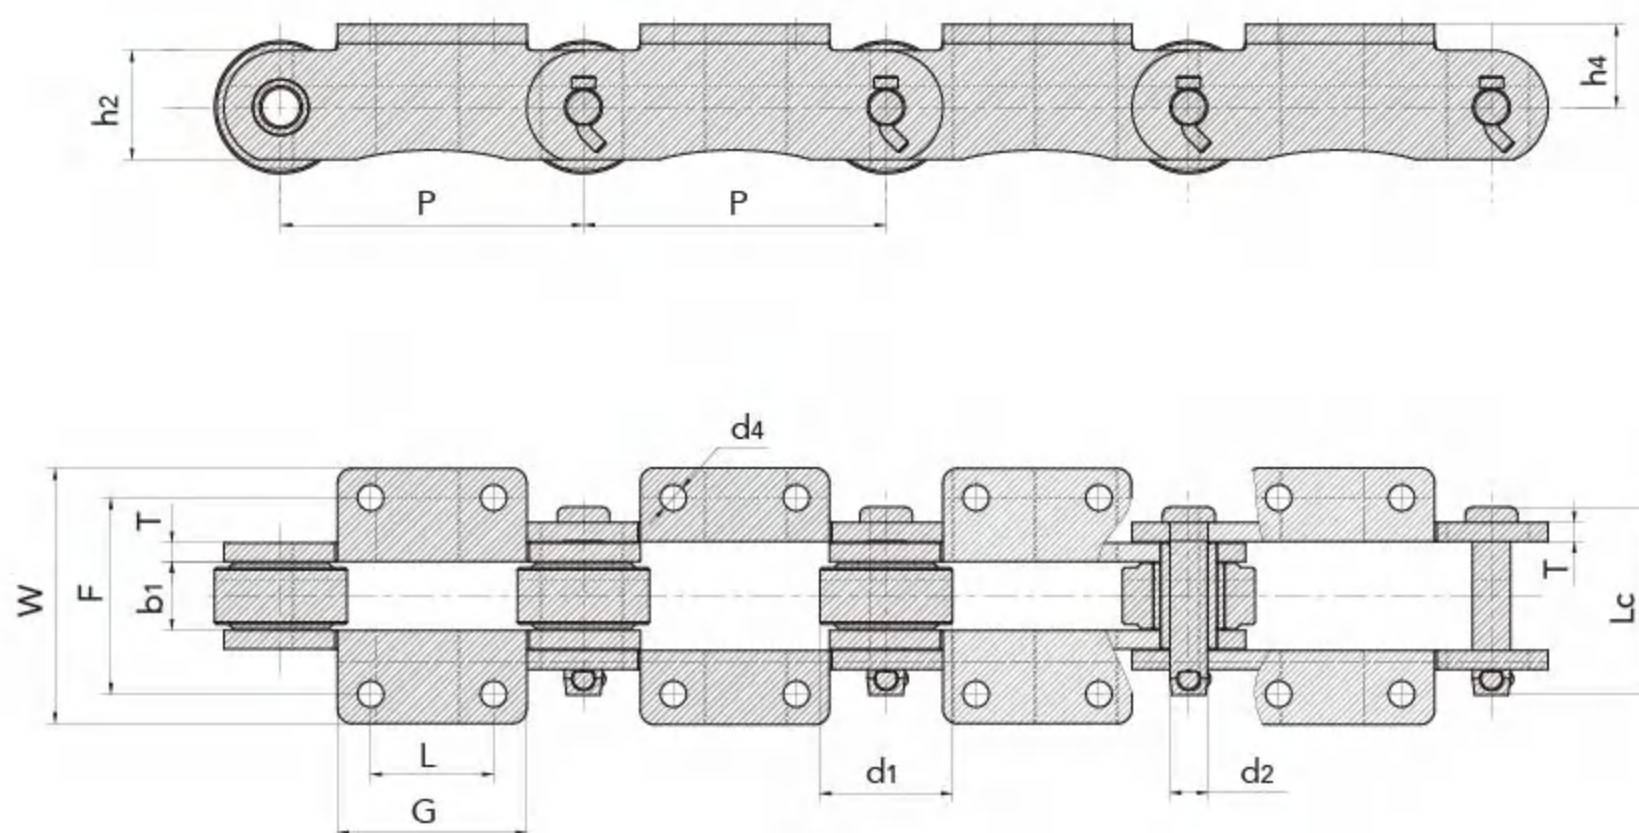


糖机链 Sugar mill chain

糖机链 Sugar mill chain

链号	节距 Pitch	套筒直径 Bush diameter	内节内宽 Width between inner plates	销轴直径 Pin diameter	销轴长度 Pin length	链板高度 Plate depth	链板厚度 Plate thickness	抗拉强度 Tensile strength	每米长重 Weight per meter
Chain No.	P	d ₃ max	b ₁	d ₂ max	L _c max	h ₂ max	T max	Q min	q
	mm	mm	mm	mm	mm	mm	mm	kN/lbf	kg/m
P102BK2	101.6	25.40	54.00	15.70	110.5	38.1	9.5	160.0/35968	11.25
P152K2	152.4	36.58	66.50	19.05	126.0	58.8	9.7	330.0/74184	17.26

糖机链 Sugar mill chain

链号	P	G	L	F	W	h ₄	d ₄
Chain No.	mm	mm	mm	mm	mm	mm	mm
P102BK2	101.6	66.50	44.50	134.90	162.80	25.40	10.40
P152K2	152.4	114.30	58.70	158.75	212.85	38.10	13.50

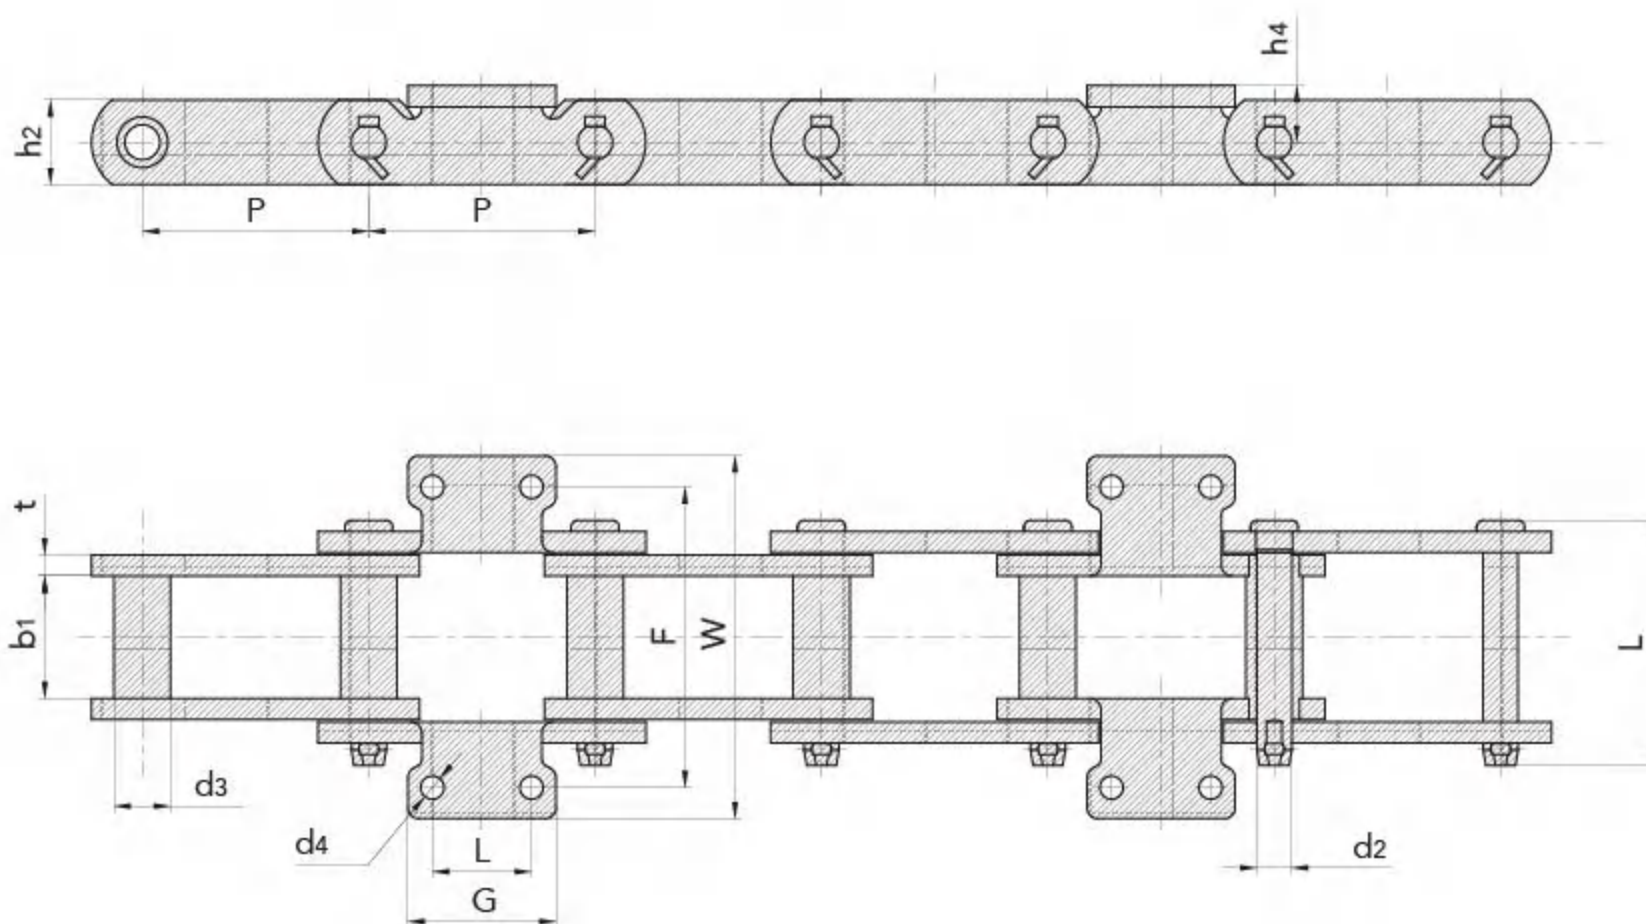

传动链
Driving Chain

曳引链
Hoisting Chain

输送带
Conveyor Chain

不锈钢链
Stainless Steel Chain

农机链
Agricultural Chain


糖机链 Sugar mill chain

糖机链 Sugar mill chain

链号	节距	滚子直径	内节内宽	销轴直径	销轴长度	链板高度	链板厚度	抗拉强度	平均抗拉强度	每米长重
	Pitch	Roller diameter	Width between inner plates	Pin diameter	Pin length	Plate depth	Plate thickness	Tensile strength	Average tensile strength	Weight per meter
Chain No.	P	d ₁ max	b ₁	d ₂ max	L _c max	h ₂ max	T max	Q min	Q ₀	q
	mm	mm	mm	mm	mm	mm	mm	kN/lbf	kN	kg/m
P101.6F1	101.60	30.00	40.00	19.00	100.00	45.00	9.50	250.0/56200	275.0	12.50
P152F78	152.40	69.85	38.10	22.23	97.10	57.20	9.52	400.0/89920	440.0	19.42
P152F88	152.40	88.90	38.10	23.83	103.20	60.30	10.30	438.0/98462	480.0	22.23
P152F114	152.40	70.00	37.10	25.00	98.00	75.00	9.52	600.0/134880	660.0	24.60
P152F156	152.40	69.85	38.10	18.90	96.60	57.00	9.52	378.1/85001	416.0	18.95
P152F2	152.40	69.85	38.10	18.90	96.60	50.80	9.52	350.0/78680	385.0	17.27
P203.2F11	203.20	89.90	46.00	25.40	124.00	76.20	12.70	690.0/155112	760.0	32.30

■*套筒链：表中滚子直径d₁为套筒直径


■*Bush chain: d₁ in the table indicates the external diameter of the bush

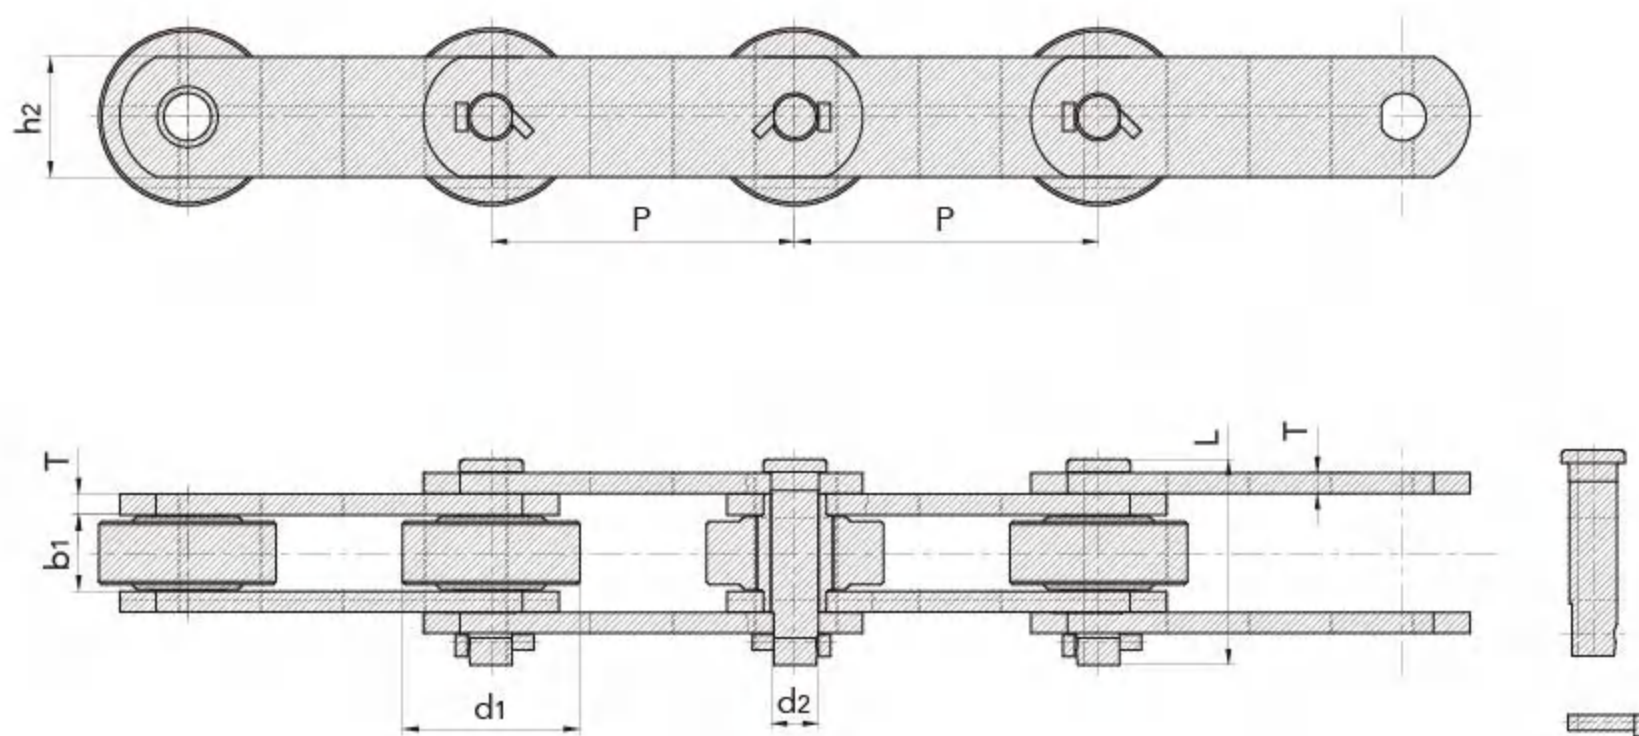

棕油链 Palm oil chain

棕油链 Palm oil chain

链号	节距 Pitch	滚子直径 Roller diameter	内节内宽 Width between inner plates	链板高度 Plate depth	销轴直径 Pin diameter	销轴长度 Pin length		链板厚度 Plate thickness	抗拉强度 Tensile strength	每米长重 Weight per meter
Chain No.	P	d ₁ max	b ₁ min	h ₂ max	d ₂ max	L max	L _c max	T max	Q min	q
	mm	mm	mm	mm	mm	mm	mm	mm	kN/lbf	kg/m
PO101.6F1	101.6	47.6	19.0	38.1	19.05	45.4	52.1	5.1/3.8	97.8/22000	6.40
PO101.6F2	101.6	66.7	25.4	50.0	26.97	63.8	83.0	7.1/5.1	176.0/40000	14.62
PO152.4F1	152.4	66.7	25.4	50.0	26.97	63.8	83.0	7.1/5.1	176.0/40000	11.42
PO152.4HF1	-	-	-	-	-	-	-	-	286.0/65000	11.42
PO152.4F2	152.4	88.9	38.1	61.0	31.75	85.6	93.3	9.5/7.9	308.0/70000	35.46

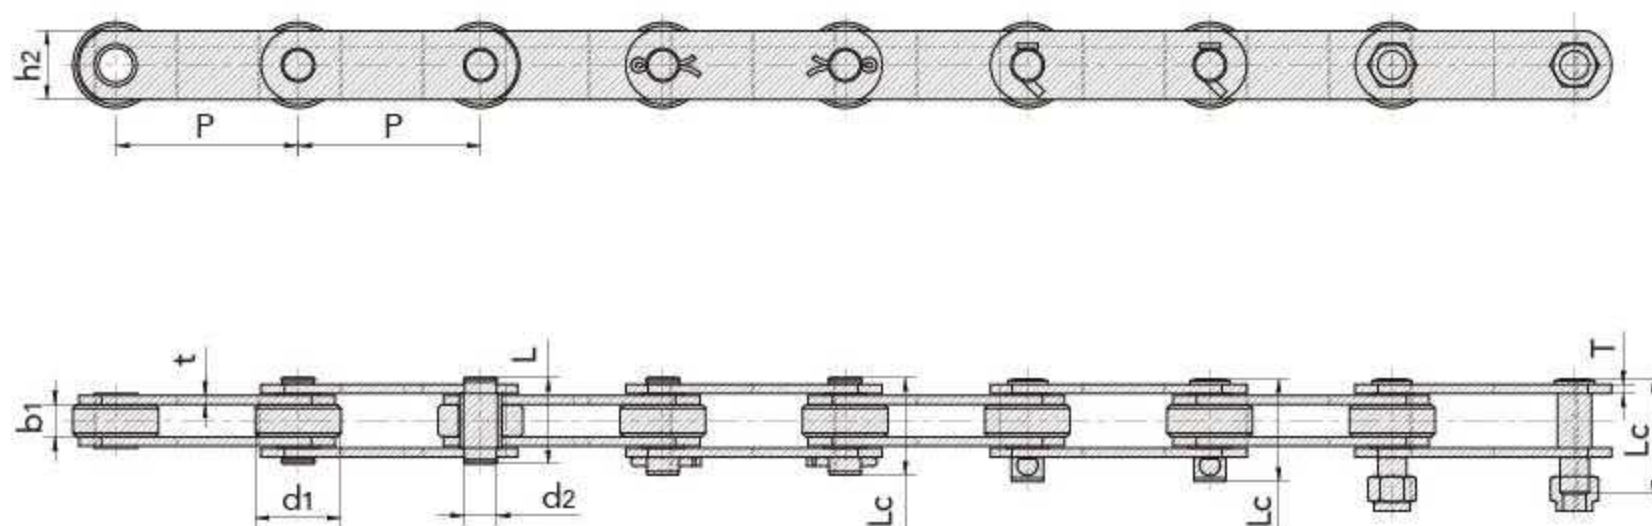

传动链
Driving Chain

曳引链
Hoisting Chain

输送链
Conveyor Chain


不锈钢链
Stainless Steel Chain

农机链
Agricultural Chain

棕油链 Palm oil chain

棕油链 Palm oil chain

链号	节距 Pitch	滚子直径 Roller diameter	内节内宽 Width between inner plates	链板高度 Plate depth	销轴直径 Pin diameter		销轴长度 Pin length		链板厚度 Plate thickness	抗拉强度 Tensile strength	每米长重 Weight per meter
Chain No.	P	d ₁ max	b ₁ min	h ₂ max	d ₂ max	d ₃ max	L max	L _c max	T max	Q min	q
	mm	mm	mm	mm	mm	mm	mm	mm	mm	kN/lbf	kg/m
P101.6HPF1	101.6	47.6	19.0	38.1	19.05	13.20	42.6	44.3	5.1/3.8	80/18000	5.91
P152.4HPF1	152.4	66.7	25.4	50.0	26.97	19.43	57.9	59.4	7.1/5.1	160/36000	10.44
PO152.4HHPF1	152.4	66.7	25.4	50.0	26.97	19.43	57.9	59.4	7.1/5.1	244/55000	10.44
PO152HPF2	152.4	88.9	38.1	61.0	31.75	23.10	85.6	93.3	9.5/7.9	220/50000	23.49

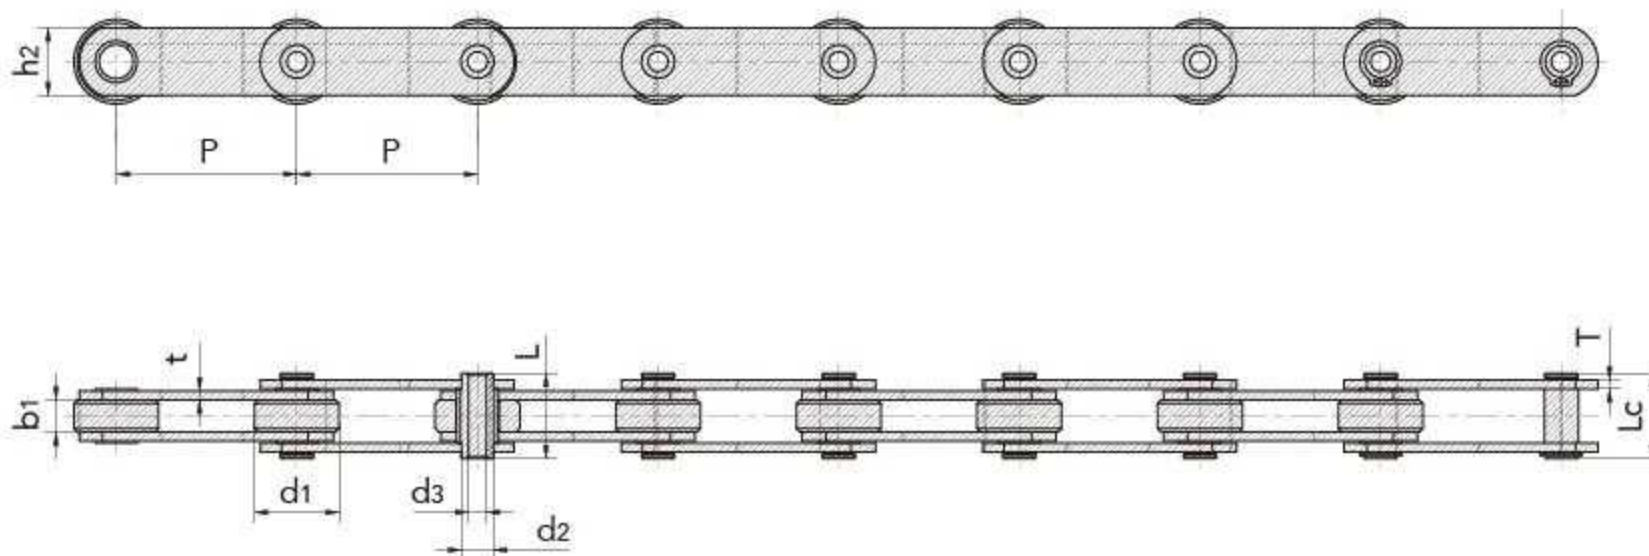

模锻可拆链 Drop forged rivetless chain

模锻可拆链 Drop forged rivetless chain

	链号	参考节距 Reference Pitch	销轴直径 Pin diameter	销轴长度 Pin length	标准测量长度 Standard measurement length	标准测量长度的节距数 Number of pitch of standard measurement length	侧向转角 Side corner	链板宽度 Width of sidebar	抗拉强度 Tensile strength	每米长重 Weight per meter
	Chain No.	P	d2	L	min/max		α	h2		
		mm	mm	mm	mm			mm	kN	kg/m
英制系列 British system series	X348	76.6	13.5	47.0	3050.5/3095.2	40.0	9°	27	98	2.7
	X458	102.4	16.0	58.0	3063.1/3090.2	30.0	9°	35	187	5.2
	468H	102.4	19.5	84.1	3063.1/3090.2	30.0	9°	47.8	311.7	11.5
	X678	153.2	22.3	77.0	3055.1/3082.8	20.0	7°	51.6	318	9.5
	698	153.2	28.0	95.3	3055.1/3082.8	20.0	7°	60	515	17.0
公制系列 Metric system series	698H	152.4	39.0	154.0	3039.2/3066.6	20.0	7°	72	1078	37.7
	F100X16	100.0	15.5	77.0	2991.3/3018.3	30.0	9°	35	187	4.7
	F100X17	100.0	17.0	77.0	2991.3/3018.3	30.0	9°	35	187	4.0
	F160X24	160.0	23.5	96.0	3190.7/3219.5	20.0	7°	51.6	318	10.3


传动链
Driving Chain


曳引链
Hoisting Chain

输送带
Conveyor Chain

不锈钢链
Stainless Steel Chain

农机链
Agricultural Chain

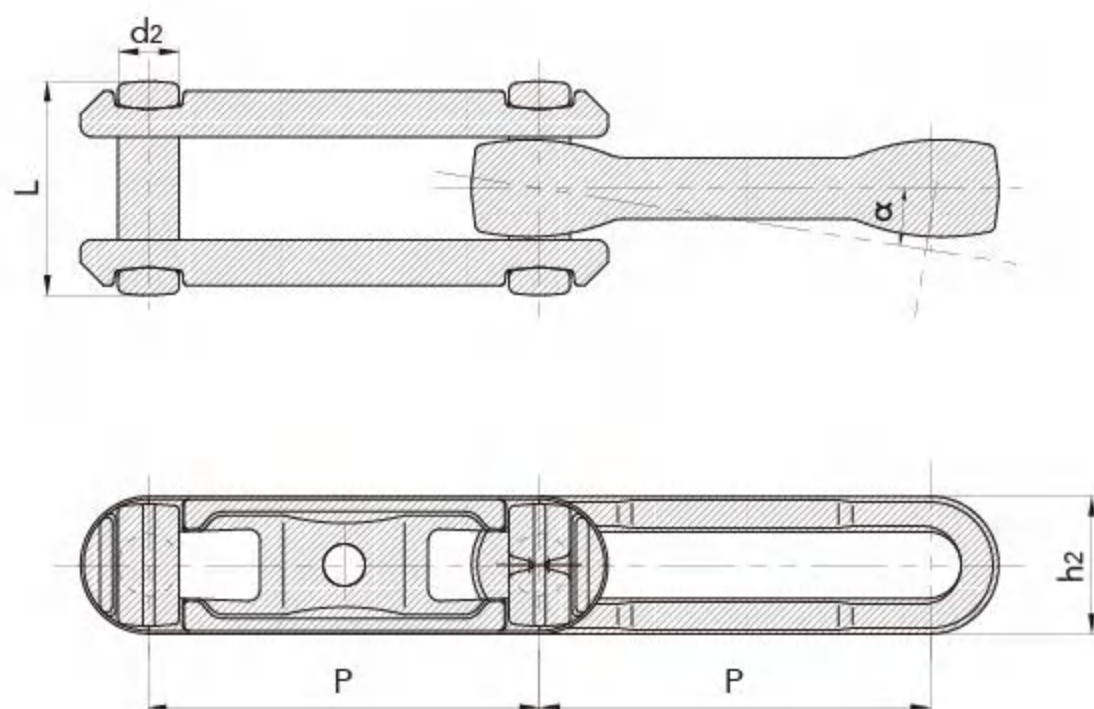

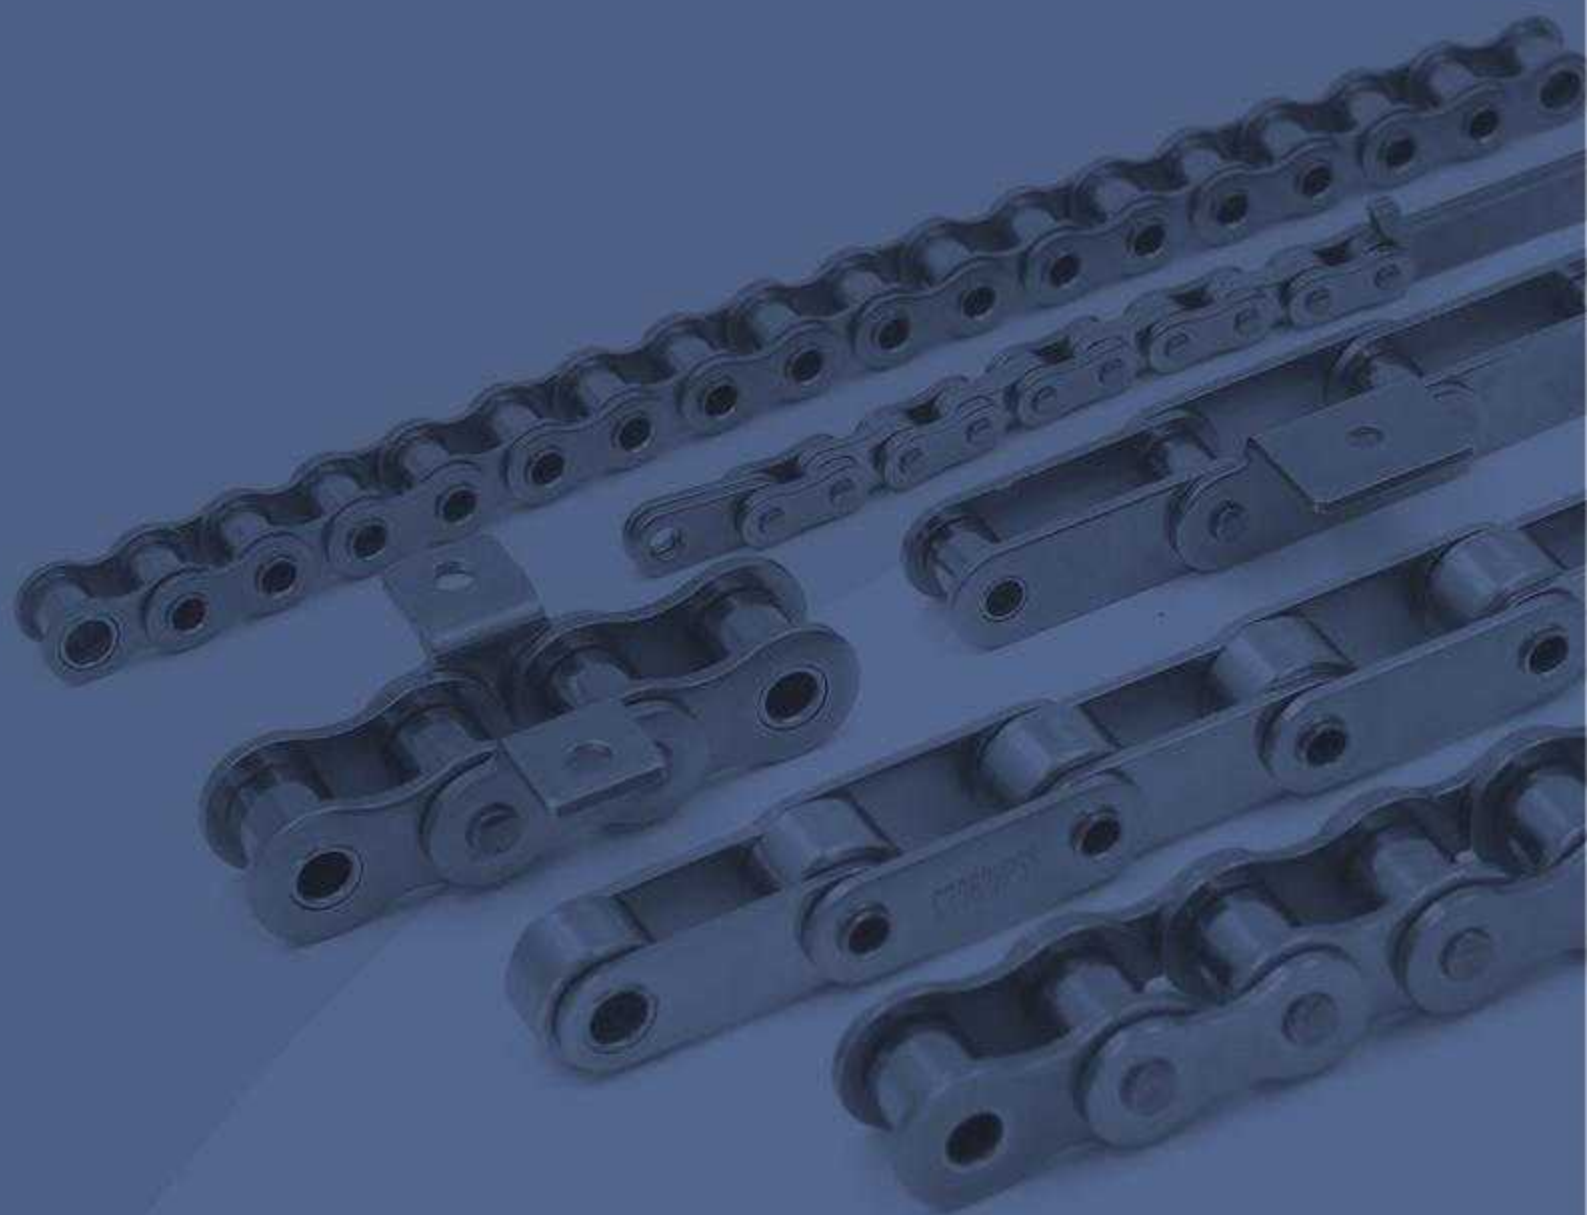

不锈钢滚子链

Stainless steel roller chain

不锈钢滚子链 Stainless steel roller chain

链号	节距	滚子直径	内节内宽	销轴直径	销轴长度		内链板高度	链板厚度	破断载荷	每米长重
	Pitch	Roller diameter	Width between inner plates	Pin diameter	Pin length		Innerplate depth	Plate thickness	Breaking load	Weight per meter
Chain No.	P	d ₁ max	b ₁ min	d ₂ max	L max	L _c max	h ₂ max	T max	Q	q
	mm	mm	mm	mm	mm	mm	mm	mm	kN/lbf	kg/m
*04CSS	6.350	3.30	3.18	2.31	7.90	8.40	6.00	0.80	2.5/568	0.15
*06CSS	9.525	5.08	4.77	3.58	12.40	13.17	9.00	1.30	5.5/1250	0.33
08ASS	12.700	7.95	7.85	3.96	16.60	17.80	12.00	1.50	9.6/2182	0.63
41SS	12.700	7.77	6.25	3.58	13.75	15.00	9.91	1.30	6.0/1360	0.46
10ASS	15.875	10.16	9.40	5.08	20.70	22.20	15.09	2.03	15.2/3455	1.03
12ASS	19.050	11.91	12.57	5.94	25.90	27.70	18.00	2.42	21.7/4932	1.51
16ASS	25.400	15.88	15.75	7.92	32.70	35.00	24.00	3.25	38.9/8841	2.62
20ASS	31.750	19.05	18.90	9.53	40.40	44.70	30.00	4.00	60.0/13636	3.94
24ASS	38.100	22.23	25.22	11.10	50.30	54.30	35.70	4.80	72.5/16477	5.72
28ASS	44.450	25.40	25.22	12.70	54.40	59.00	41.0	5.60	94.0/21363	7.70
04BSS	6.000	4.00	2.80	1.85	6.80	7.80	5.00	0.60	2.0/455	0.11
05BSS	8.000	5.00	3.00	2.31	8.20	8.90	7.10	0.80	3.5/795	0.20
#06BSS	9.525	6.35	5.72	3.28	13.15	14.10	8.20	1.30	6.2/1409	0.41
08BSS	12.700	8.51	7.75	4.45	16.70	18.20	11.80	1.60	12.0/2727	0.70
10BSS	15.875	10.16	9.65	5.08	19.50	20.90	14.70	1.70	14.5/3295	0.94
12BSS	19.050	12.07	11.68	5.72	22.50	24.20	16.00	1.85	18.5/4205	1.16
16BSS	25.400	15.88	17.02	8.28	36.10	37.40	21.00	4.15/3.1	40.0/9091	2.73
20BSS	31.750	19.05	19.56	10.19	41.30	45.00	26.40	4.5/3.5	59.0/13409	3.73
24BSS	38.100	25.40	25.40	14.63	53.40	57.80	33.20	6.0/4.8	104.0/25454	7.20
32BSS	50.800	29.21	30.99	17.81	66.00	71.00	42.00	7.0/6.0	150.0/34090	10.22

■*套筒链：表中滚子直径d₁为套筒直径


■*Bush chain: d₁ in the table indicates the external diameter of the bush

■#直链板

■# Straight side plates

■不锈钢链条适合在易受食品、化学、药品等侵蚀场合使用，还可用于高低温场合

■Stainless steel chains are suitable for corrosive conditions involving food, chemicals, pharmaceuticals, etc. and also suitable for high and low temperature conditions

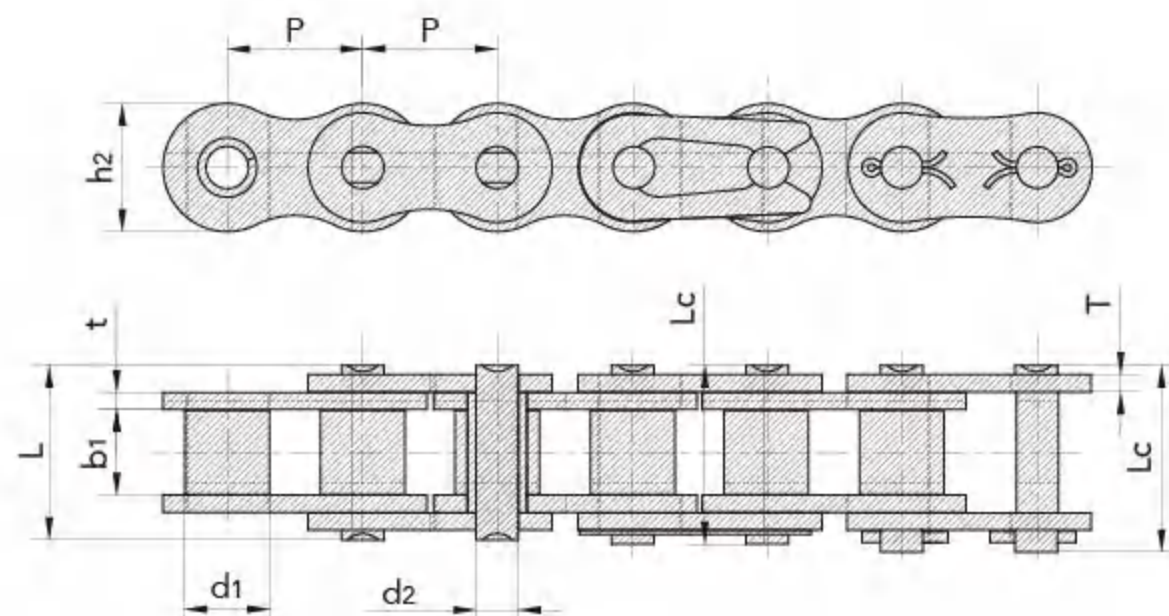


不锈钢双节距输送链 Stainless steel double pitch conveyor chain


不锈钢双节距输送链 Stainless steel double pitch conveyor chain

链号	节距 Pitch	滚子直径 Roller diameter	内节内宽 Width between inner plates	销轴直径 Pin diameter	销轴长度 Pin length		内链板高度 Innerplate depth	链板厚度 Plate thickness	破断载荷 Breaking load	每米长重 Weight per meter
Chain No.	P	d ₁ max	b ₁ min	d ₂ max	L max	L _c max	h ₂ max	T max	Q min	q
	mm	mm	mm	mm	mm	mm	mm	mm	kN/lbf	kg/m
C2040SS	25.40	7.95	7.85	3.96	16.6	17.8	12.0	1.50	9.6/2182	0.51
C2042SS		15.88								0.85
C2040HSS	25.40	7.95	7.85	3.96	18.8	19.9	12.0	2.03	9.6/2182	0.66
C208BSS	25.40	8.51	7.75	4.45	16.7	18.2	11.8	1.60	12.0/2727	0.56
C208BLSS		15.88								0.90
C2050SS	31.75	10.16	9.40	5.08	20.7	22.2	15.0	2.03	15.2/3455	0.79
C2052SS		19.05								1.29
C2060SS	38.10	11.91	12.57	5.94	25.9	27.7	18.0	2.42	21.7/4932	1.13
C2062SS		22.23								1.63
C2060HSS	38.10	11.91	12.57	5.94	29.2	31.6	18.0	3.25	21.7/4932	1.46
C2062HSS		22.23								2.10
C2080SS	50.80	15.88	15.75	7.92	32.7	36.5	24.0	3.25	38.9/8841	2.11
C2082SS		28.58								3.16
C2080HSS	50.80	15.88	15.75	7.92	36.2	39.4	24.0	4.00	38.9/8841	2.57
C2082HSS		28.58								3.63
C2100SS	63.50	19.05	18.90	9.53	40.4	44.7	30.0	4.00	60.0/13636	3.05
C2102SS		39.67								4.89
C2100HSS	63.50	19.05	18.90	9.53	43.6	46.9	30.0	4.80	60.0/13636	3.61
C2102HSS		39.67								5.45

小滚子型
Small roller type

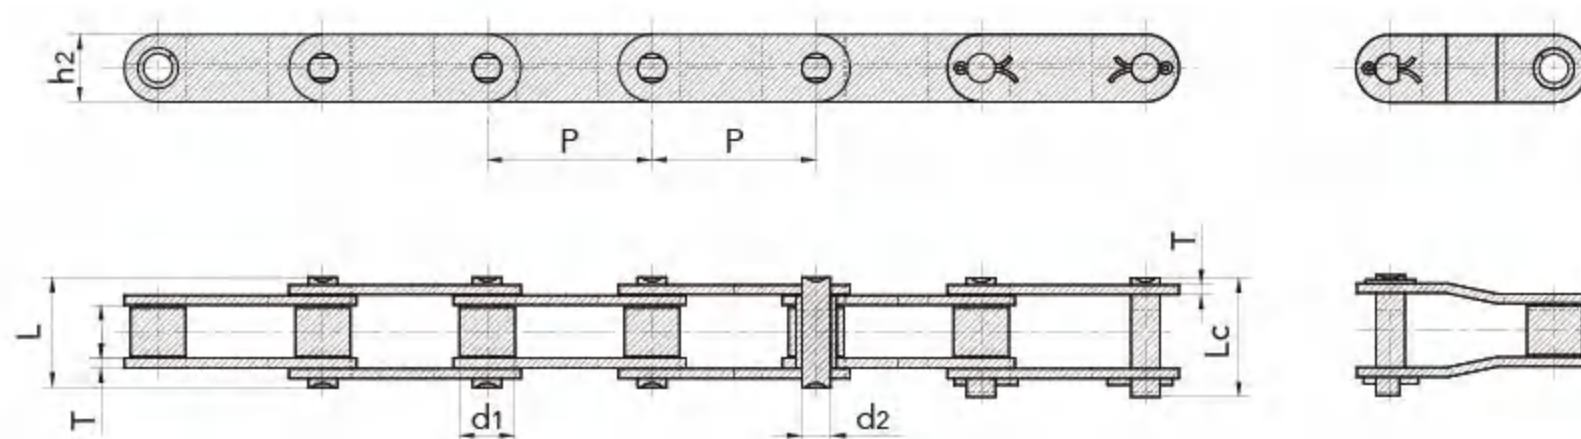

大滚子型
Large roller type

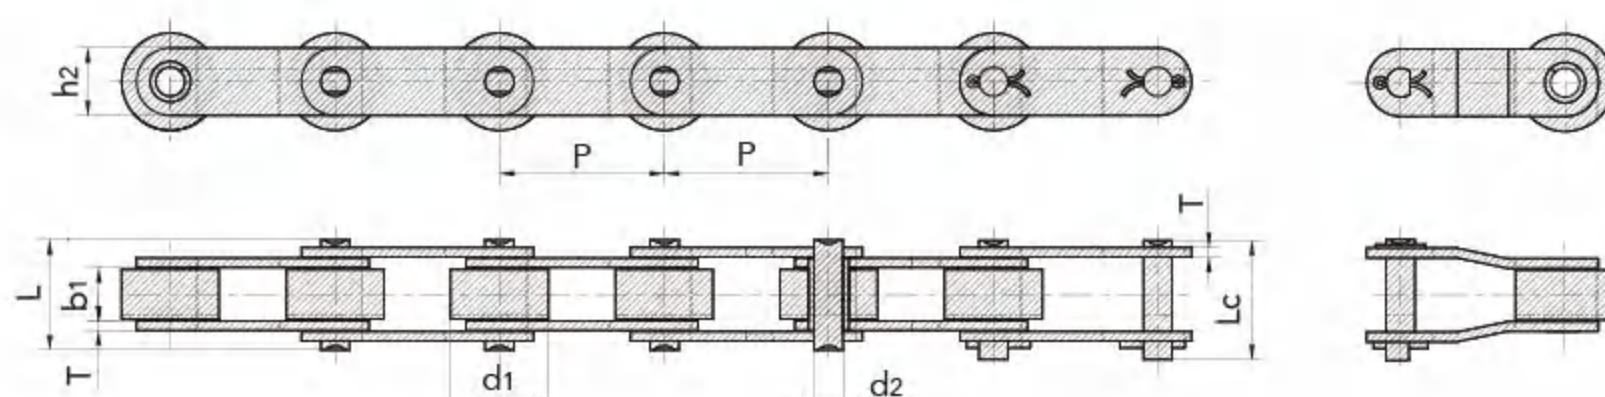

不锈钢空心销轴链 Stainless steel hollow pin chain


不锈钢空心销轴链 Stainless steel hollow pin chain

链号	节距	套筒直径	内节内宽	销轴直径		销轴长度		内链板高度	链板厚度	破断载荷	每米长重	型号
	Pitch	Bush diameter	Width between inner plates	Pin diameter		Pin length		Innerplate depth	Plate thickness	Breaking load	Weight per meter	Type
Chain No.	P	d ₁ max	b ₁ min	d ₂ max	d ₃ min	L max	L _c max	h ₂ max	T max	Q min	q	
	mm	mm	mm	mm	mm	mm	mm	mm	mm	kN/lbf	kg/m	
08BHPFSS	12.700	8.51	7.75	6.55	4.50	16.4	17.6	11.80	1.6/1.3	7.8/1773	0.57	A
40HPSS	12.700	7.95	7.85	5.63	4.00	16.5	17.6	12.00	1.50	7.7/1750	0.55	A
50HPSS	15.875	10.16	9.40	7.03	5.13	20.7	21.9	15.09	2.03	14.0/3182	0.92	A
60HPSS	19.050	11.91	12.70	8.31	6.00	25.8	26.8	18.00	2.42	16.8/3818	1.31	A
*12BHPSS	19.050	12.07	11.68	6.50	4.00	21.6	22.8	15.90	1.85	16.5/3750	1.10	A
80HPSS	25.400	15.88	15.75	11.40	8.05	32.5	33.8	24.00	3.25	35.0/7955	2.29	A
C2040HPSS	25.400	7.95	7.85	5.63	4.00	16.5	17.6	12.00	1.50	7.7/1750	0.47	B
C2050HPSS	31.750	10.16	9.40	7.22	5.12	20.5	21.8	15.00	2.03	14.3/3250	0.77	B
C2060HPSS	38.100	11.91	12.70	8.31	6.00	25.8	26.8	17.00	2.42	16.8/3818	1.03	B
C2080HPSS	50.800	15.88	15.75	11.40	8.05	32.5	33.8	24.00	3.25	35.0/7955	1.83	B
*HB50.8SS	50.800	30.00	10.50	11.40	8.20	27.4	28.6	26.00	3.10	35.0/7955	2.60	A


■*套筒链：表中滚子直径d₁为套筒直径

■*Bush chain: d₁ in the table indicates the external diameter of the bush

A型 Type A

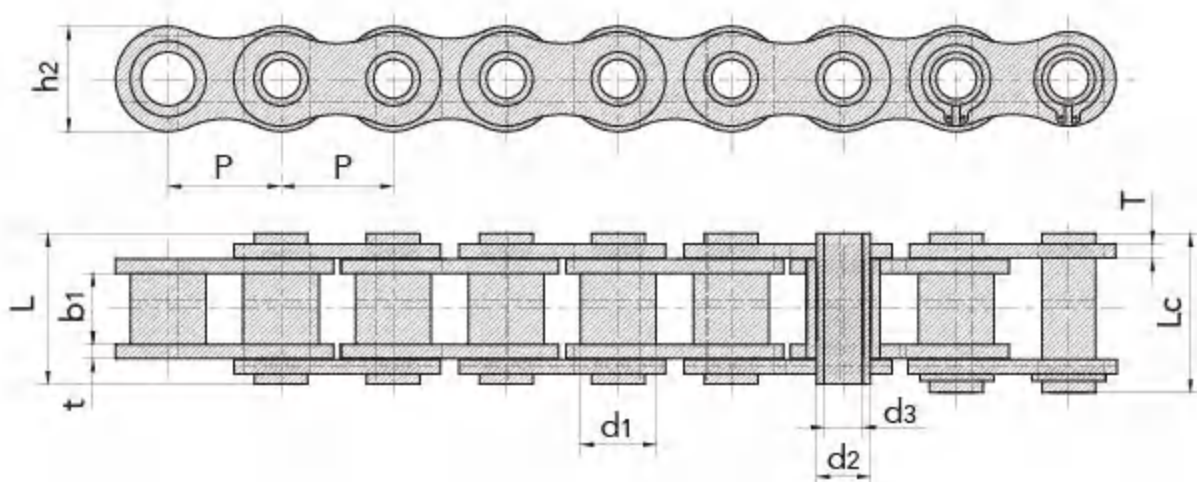

B型 Type B

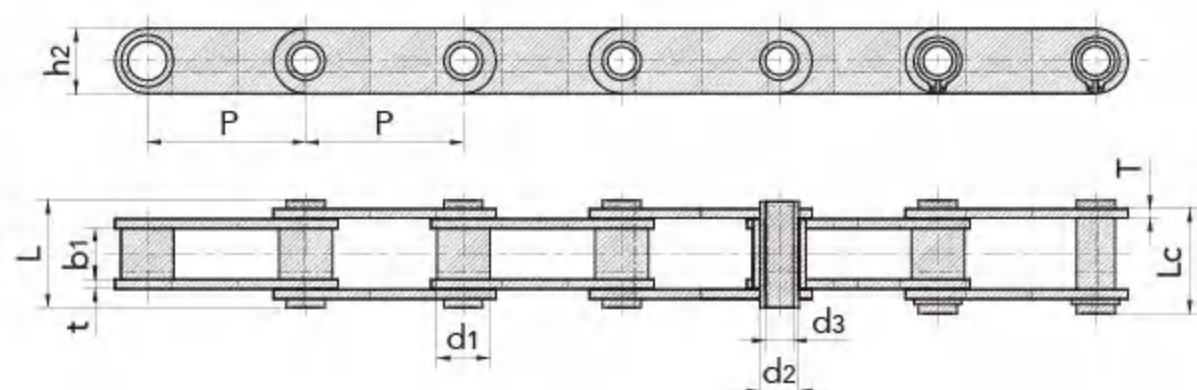

不锈钢空心销轴链 Stainless steel hollow pin chain

不锈钢空心销轴链 Stainless steel hollow pin chain

链号	节距	滚子直径	内节内宽	销轴直径		销轴长度		内链板高度	链板厚度	破断载荷	每米长重
	Pitch	Roller diameter	Width between inner plates	Pin diameter		Pin length		Innerplate depth	Plate thickness	Breaking load	Weight per meter
Chain No.	P	d ₁ max	b ₁ min	d ₂ max	d ₃ min	L max	L _c max	h ₂ max	T max	Q min	q
	mm	mm	mm	mm	mm	mm	mm	mm	mm	kN/lbf	kg/m
C2042HPSS	25.40	15.88	7.85	5.63	4.00	16.5	17.6	12.0	1.50	7.7/1750	0.79
C2052HPSS	31.75	19.05	9.53	7.22	5.12	20.5	21.8	15.0	2.03	14.3/3250	1.27
C2062HPSS	38.10	22.23	12.70	8.31	6.00	25.8	26.8	17.0	2.42	16.8/3818	1.74
C2082HPSS	50.80	28.58	15.75	11.40	8.05	32.4	33.8	24.0	3.25	35.0/7955	2.86
C2042H-HPSS	25.40	15.88	7.85	5.63	4.00	18.8	19.9	12.0	2.03	7.7/1750	0.96
C2052H-HPSS	31.75	19.05	9.53	7.22	5.12	22.1	23.4	15.0	2.42	14.3/3250	1.46
C2062H-HPSS	38.10	22.23	12.70	8.31	6.00	29.2	30.2	17.0	3.25	16.8/3818	2.02
C2082H-HPSS	50.80	28.58	15.75	11.40	8.05	36.2	37.6	24.0	4.00	35.0/7955	3.30

